



EYECONIC ROUND WALL WASH

| Project Ref. | |
|----------------|--|
| Luminaire Ref. | |
| Date | |

EYECONIC ROUND WALL WASH - STANDARD

The Eyeconic Round Wall Wash is a recessed, fixed downlight with a 80mm bezel, wall wash lens and a discrete removeable anti-glare guard.

PRODUCT FEATURES

PRODUCT VIEW

| Downlight | |
|---|--|
| Fixed | |
| Interior | |
| LED | |
| IP65 | |
| Available in all Phos finishes | |
| Interchangeable optics & accessories (pre & post install) | |

PHOS STANDARDS

60min fire-certified

Acoustic-rated

UK designed, manufactured and assembled

5 year warranty

OPTICS

Standard beam angles: Wall Wash

PHYSICAL PROPERTIES

Diameter ø80mm

Height 73mm (4W/9W)

Height 98mm (14W)


Cut-out ø56mm

DRIVER INFORMATION

Driver Configurator (Link)



DIMENSIONS

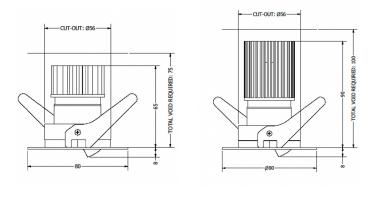

4W & 9W

14W

ENGINEERING LIGHT

TECHNICAL SPECIFICATIONS

| ССТ | 2700K | | | | | |
|---------------------------|------------------------|------|-------|--|--|--|
| Wattage | 4W | 9W | 14W | | | |
| Beam Angles | WW | WW | WW | | | |
| Luminaire Lumens (lm) | 125 | 211 | 262 | | | |
| Circuit Watts (c/W) | 6 | 10.8 | 16.2 | | | |
| Luminaire Efficacy (l/cW) | 21 | 20 | 16 | | | |
| Luminance (Cd) | 147 | 243 | 309 | | | |
| Forward Voltage (Vf) | ard Voltage (Vf) 11.78 | | 12.65 | | | |
| Current (mA) | 350 | 700 | 1050 | | | |


| ССТ | 3000K | | | | | |
|----------------------------|-------|-------|-------|--|--|--|
| Wattage | 4W | 9W | 14W | | | |
| Beam Angles | WW | WW | WW | | | |
| Luminaire Lumens (lm) | 131 | 232 | 302 | | | |
| Circuit Watts (c/W) | 6 | 10.8 | 16.3 | | | |
| Luminaire Efficacy (l/cW) | 22 | 21 | 18 | | | |
| Luminace (Cd) | 155 | 268 | 354 | | | |
| Forward Voltage (Vf) 11.78 | | 12.36 | 12.65 | | | |
| Current (mA) | 350 | 700 | 1050 | | | |

| 2 step MacAdams | | | | |
|--|--|--|--|--|
| 90+ | | | | |
| Rg 101 Rf 90 | | | | |
| LM80 | | | | |
| 50,000 hours | | | | |
| Mains dim / Non-dim / 0-10V / DALI (dim to dark 0.01%) / Casambi | | | | |
| 0 | | | | |
| 0.02 | | | | |
| Up to 10m (AWG 20)* | | | | |
| Series | | | | |
| Remote emergency (Maintained / Self Test) | | | | |
| | | | | |

*If driver distance from fitting is +10m see driver configurator document for guidance


ENGINEERING LIGHT

LIGHT CONES



ww

POLAR CURVES



PARTCODE BUILDER

Example Code: EY-RW-WT/B1-STD14-30-90-WW-1050

| Family | Variant | Bezel Finish | Socket Finish | Engine | Power | ССТ | CRI | Beam Angle | Driver Current |
|-----------------------|----------------------------|----------------------|-----------------------------|------------------------|--------------------|--------------------|-----|---------------|-------------------|
| EY Eyeconic | RW Round Wall Wash | WT White Textured | B1 Anodised Black | STD Standard | 4 Watts | 27 2700К | 90 | ww | 350 |
| | B1 Anodised Black *C | | 9 Watts | 30 3000К | | | 700 | | |
| | | Custom | | | 14 Watts | | | | 1050 |

*Codes for custom finishes can be found on the page 6.

PI-IC)S

FINISHES

Every element of your light can be finished in any of the options below:

PLATED (Interior ONLY)





Antique Bronze **01**



Satin Copper **06**



Polished Brass **09**



Polished Chrome 03



Satin Nickel **04**



Polished Copper **05**

ANODISED (Interior ONLY, except Orba Exteriors)



Tuba Brass **11**



Mocha Bronze **16**



Taupe Bronze **17**



Espresso Bronze 13



24K Gold **18**



Cocoa Bronze 14



Champagne Gold **19**



lce Gold **15**



Anodised Black (9005) **B1**

POWDER COAT (Interior & Exterior)





Textured White (9010) WT



Textured Black (9005) BT



RAL Classic www.phos.co.uk/finishes



RAL Design price on application

PH()\$