

30W	CR190	3000K/3500K/4000K CCT Switchable	110°	bridgelux. 50,000h@L80B10	IP44	5 GUARANTEED	CE		65	Ø400X400
-----	-------	-------------------------------------	------	------------------------------	------	-----------------	----	--	----	----------

30W	CR190	3000K/3500K/4000K CCT Switchable	110°	bridgelux. 50,000h@L80B10	IP44	5 GUARANTEED	CE		65	Ø400X400
-----	-------	-------------------------------------	------	------------------------------	------	-----------------	----	--	----	----------

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130P-WN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130P-WN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130P-WN

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130S-WN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130S-WN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130S-WN

Code Remark: P=(Phase Dim)

Code Remark: S=On-Off LED Driver+Microwave Sensor



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130P-BN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130P-BN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130P-BN




LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
28 W	30 W	78 V	350 mA	90	3000K	110°	2800lm	2000lm	P4SC-9S3A130S-BN
					3500K	110°	2900lm	2100lm	P4SC-9S3A130S-BN
					4000K	110°	2900lm	2100lm	P4SC-9S3A130S-BN

Code Remark: P=(Phase Dim)

Code Remark: S=On-Off LED Driver+Microwave Sensor

Light Distribution

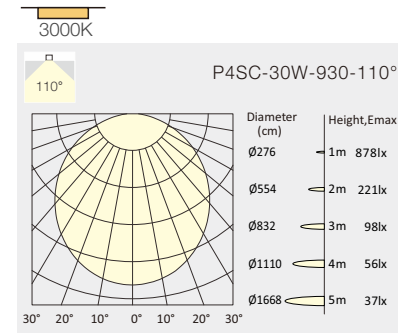

Light Distribution

