


NEKO / Capetown-Recessed
Recessed Step Light





NEKO / Capetown-Recessed
Recessed Step Light



Capetown Round-Recessed




Capetown Square-Recessed

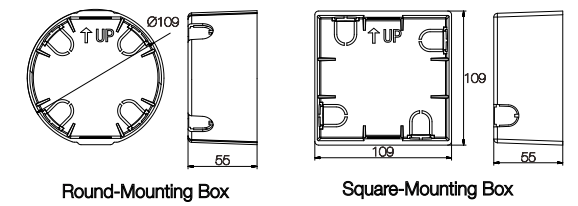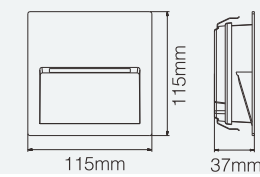

6W CRI80 3000K 65° IP65 IK07 EDISON 50,000h@L80B10 CE 3 Body: Aluminum Color: Dark-Grey

LED Power	System Power	Input	Output	CRI	CCT	Beam	System Output	Model	Code
4 W	6 W	220-240 VAC	Ø110*55	80	3000K	65°	220lm	Capetown RR-830-65° CTRR-8306506F-DN	


Remark: With internal Non-Dimmable LED driver



Capetown Round-Recessed

4 W	6 W	220-240 VAC	110*110*55	80	3000K	65°	220lm	Capetown SR-830-65° CTSR-8306506F-DN	
-----	-----	-------------	------------	----	-------	-----	-------	--------------------------------------	--

Remark: With internal Non-Dimmable LED driver

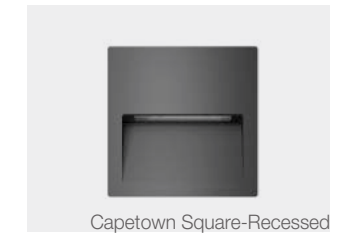

Capetown Square-Recessed

Light Distribution

