

Microline

14 x 14 Chain Dotless



Body

Surface mounted modular flexible LED system in extruded aluminium.

Available in different length configurations based on 65mm link with a 75mm increment.

Section 14x14mm.

Mounting options:

Integrated magnets for easy installation.

L mounting brackets.

U mounting clips.

*** Plastic free packaging.**

Accessories

Mounting accessories included.

Power extension cable Art. 2D58 to be ordered separately.

Finish

Anodized black, white, brass polished, gold or aluminium finish. Other finish options available on request.

LED sources

SMD.

CRI: 93, 95 & 97 | R9: >90 | CCT: 1800K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K.

3-Step MacAdam.

Other CRI and CCT options available on request.

Optic

Extra Wide Beam Angle.

Opal Diffuser (OD).

Lenticular Transparent Diffuser (TD).

Opal Rigid Diffuser (RD).

Driver

Driver not included to be ordered separately.

Work with 24V Constant Voltage Driver positioned remotely.

Applications

Curvaceous miniature linear light with a disappearing look delivers an homogenous and diffuse light effect. its peculiar structure allow it to fit in cove curved surfaces.

Application areas: Retail, cabinet displays, showcases, jewelry displays, residential, restaurants, museums.

Related Products

Microline
14 x 14
Dotless




Microline
14 x 14
Corner
Dotless



Microline 14 x 14 Chain Dotless | 1.2W/Link | G440




Min. L= 65mm (2.55"), 1 Link

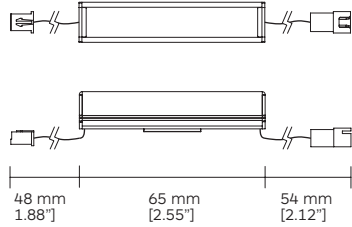

Max. L= 2990mm (117.71"), 40 Links

Mounting options

With magnet L bracket With mounting U clip With magnet

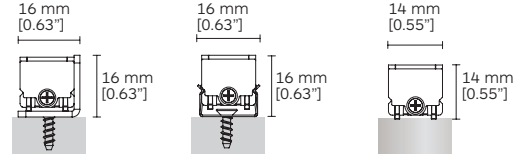

Increment: 75mm (2.95"), 1 Link

Available length codes ¹

No. of Links	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	No. of Links	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen
1	1.20W	0065	65	2.56	140 lm	21	25.20W	1565	1565	61.61	2940 lm
2	2.40W	0140	140	5.51	280 lm	22	26.40W	1640	1640	64.57	3080 lm
3	3.60W	0215	215	8.46	420 lm	23	27.60W	1715	1715	67.52	3220 lm
4	4.80W	0290	290	11.42	560 lm	24	28.80W	1790	1790	70.47	3360 lm
5	6.00W	0365	365	14.37	700 lm	25	30.00W	1865	1865	73.43	3500 lm
6	7.20W	0440	440	17.32	840 lm	26	31.20W	1940	1940	76.38	3640 lm
7	8.40W	0515	515	20.28	980 lm	27	32.40W	2015	2015	79.33	3780 lm
8	9.60W	0590	590	23.23	1120 lm	28	33.60W	2090	2090	82.28	3920 lm
9	10.80W	0665	665	26.18	1260 lm	29	34.80W	2165	2165	85.24	4060 lm
10	12.00W	0740	740	29.13	1400 lm	30	36.00W	2240	2240	88.19	4200 lm
11	13.20W	0815	815	32.09	1540 lm	31	37.20W	2315	2315	91.14	4340 lm
12	14.40W	0890	890	35.04	1680 lm	32	38.40W	2390	2390	94.09	4480 lm
13	15.60W	0965	965	37.99	1820 lm	33	39.60W	2465	2465	97.05	4620 lm
14	16.80W	1040	1040	40.94	1960 lm	34	40.80W	2540	2540	100.00	4760 lm
15	18.00W	1115	1115	43.90	2100 lm	35	42.00W	2615	2615	102.95	4900 lm
16	19.20W	1190	1190	46.85	2240 lm	36	43.20W	2690	2690	105.91	5040 lm
17	20.40W	1265	1265	49.80	2380 lm	37	44.40W	2765	2765	108.86	5180 lm
18	21.60W	1340	1340	52.76	2520 lm	38	45.60W	2840	2840	111.81	5320 lm
19	22.80W	1415	1415	55.71	2660 lm	39	46.80W	2915	2915	114.76	5460 lm
20	24.00W	1490	1490	58.66	2800 lm	40	48.00W	2990	2990	117.72	5600 lm

Code ordering example: **G 4 4 0 0 0 6 5 - 9 7 2 7 O D 0 0 1 0**

	Product code*	Length code***	>CRI	CCT**	LED Power	Nominal Lumen	Diffuser	Light Source Code	Finish	
Microline 14 x 14 Chain Dotless	G440	Min. 0065	97	27 2700K	1.2W/Link	126 lm/Link	OD	00	10 ■ Black	
		⋮		30 3000K		140 lm/Link			TD	11 □ White
		Max. 2990		35 3500K		140 lm/Link			RD	28 ■ Brass Polished
		40 4000K		142 lm/Link		35 ■ Gold				
		93 18 1800K		82 lm/Link		70 ■ Aluminium				
		22 2200K		108 lm/Link						
		95 24 2400K		114 lm/Link						

Notes:


¹ Information in the chart above is related to 3000K LED.

Driver Options

Constant Voltage

Microline 14 x 14 Chain Dotless

2V24 Constant Voltage LED Driver. 1 Driver for Maximum 47 links about 3.5m long fixtures

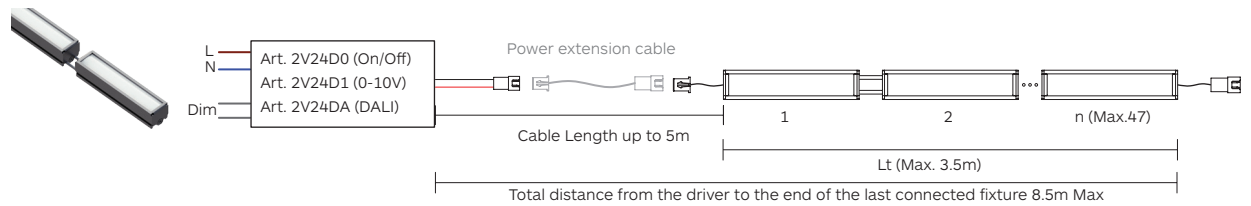

G440

Power extension cable. Art. **2D58**. 1m (if necessary).

Vin= 90~305V AC 50/60Hz
 Vout= 24VDC 2.5A 60W Max.
 Dimensions: 150x53x35mm
 IP20