

Mini Cobra Linealuce

Designed by Ponctuelle



Body

Surface mounted LED system in extruded aluminium.
Available in different length configurations starting from 65mm with increment of 60mm.
Section 14x14mm.
Constant 30mm pitch between the LED.

Mounting options:
Integrated magnets for easy installation.
L mounting brackets.
U mounting clips.

* **Plastic free packaging.**

Accessories

Honeycomb Art. 2D97.
Color filter Art. 2E41.
Mounting accessories included.
Power extension cable Art. 2C47 to be ordered separately.

Finish

Anodized black, white, brass polished or gold finish.
Other finish options available on request.

LED sources

Power LED.
CRI: 75 & 97 | R9: >90 | CCT: 2100K, 2400K, 2700K, 3000K, 3500K, 4000K.
3-Step MacAdam.
Other CRI and CCT options available on request.

Optic

Lens.
Beam angle: 21° / 29° / elliptical (22° x 47°).

Driver


Driver not included to be ordered separately.
Work with 700 mA Constant Current Driver positioned remotely.

Applications

Ideal for indirect cove illumination, it creates a wall grazing effect for architectonic surfaces. It is also a great pick also for display showcase illumination.
Application areas: Cove light, wallwash, residential, hospitality, restaurants, museums, display showcases.

Related Products

Mini Cobra Flex 

Mini Cobra Linealuce Louvre 

Mini Cobra Flex Louvre 

Mini Cobra Pro 


Mini Cobra Pro Louvre 

Mini Cobra Linealuce | G451

Mini Cobra
Linealuce



Min. L= 65mm (2 x LED)






Mounting options

With magnet L bracket


With mounting U clip

With magnet




Accessories

Honeycomb Art. 2D97



Max. L= 965mm (32 x LED)

Increment: 60mm (2.36\"), 2 LEDs

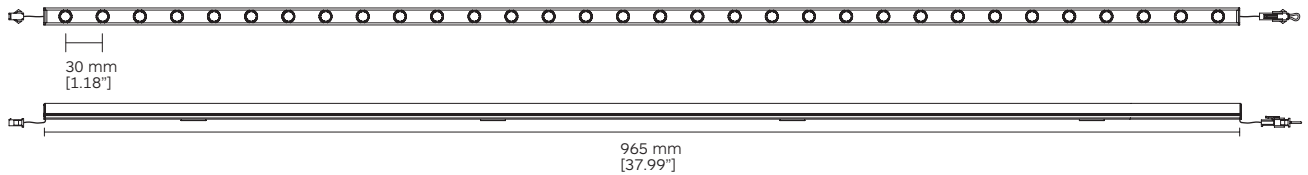

Available length codes ¹

No. of LEDs	Voltage	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	No. of LEDs	Voltage	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen
2	3.2V	2W	0065	65	2.55	180 lm	18	28.8V	18W	0545	545	21.45	1620 lm
4	6.4V	4W	0125	125	4.92	360 lm	20	32V	20W	0605	605	23.81	1800 lm
6	9.6V	6W	0185	185	7.28	540 lm	22	35.2V	22W	0665	665	26.18	1980 lm
8	12.8V	8W	0245	245	9.64	720 lm	24	38.4V	24W	0725	725	28.54	2160 lm
10	16V	10W	0305	305	12.00	900 lm	26	41.6V	26W	0785	785	30.90	2340 lm
12	19.2V	12W	0365	365	14.37	1080 lm	28	44.8V	28W	0845	845	33.26	2520 lm
14	22.4V	14W	0425	425	16.73	1260 lm	30	48V	30W	0905	905	35.62	2700 lm
16	25.6V	16W	0485	485	19.09	1440 lm	32	51.2V	32W	0965	965	37.99	2880 lm

Code ordering example: **G 4 5 1 0 0 6 5 - 9 7 2 7 2 1 0 0 1 0**

	Product code*	Length code	>CRI	CCT**	LED Power	Nominal Lumen	Beam angle (BA°)	Driver Options	Finish
Mini Cobra Linealuce	G451	Min. 0065	97	27 2700K	1W/LED	90 lm/LED	21 / 29 / EL	00 No Driver	10 ■ Black
		⋮		30 3000K					11 □ White
		Max. 0965		35 3500K					28 ■ Brass Polished
				40 4000K					35 ■ Gold
			75	21 2100K		121 lm/LED			
				24 2400K					

Notes:


¹ Information in the chart above is related to 3000K LED.

Driver Options

Constant Current

Mini Cobra Linealuce

2C07 Constant Current LED Driver. 1 Driver can drive 2-32LEDs, about 965mm Max.

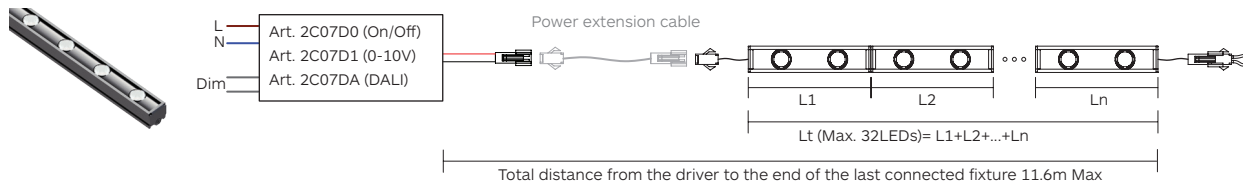


G451

Power extension cable. Art. **2C47**. 1m (if necessary).

Vin= 180-277V AC 50/60Hz
Iout= 700mA V=2-57V
P= 40W Max.
Dimensions: 123.5x81.5x23mm
IP20

Accessories

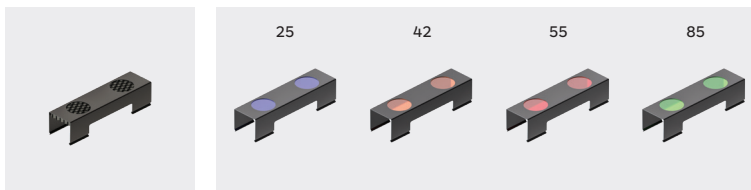

Product / Accessories

Honeycomb

Coloured
Filters

Finish: 10

Filter colour codes: 25 / 42 / 55 / 85

Mini Cobra Linealuce

2D97

2E41-25
2E41-42
2E41-55
2E41-85

* Please refer to the user manuals for further details.

Mini Cobra Linealuce Louvre

Designed by Ponctuelle



Body

Surface mounted LED system in extruded aluminium.
Available in different length configurations starting from 65mm with increment of 60mm.
Section 14x27mm.
Constant 30mm pitch between the LED.
Integrated louvre.

Mounting options:
Integrated magnets for easy installation.
L mounting brackets.
U mounting clips.

*** Plastic free packaging.**

Accessories

Mounting accessories included.
Power extension cable Art. 2C47 to be ordered separately.

Finish

Anodized black, white, brass polished or gold finish.
Other finish options available on request.

LED sources

Power LED.
CRI: 75 & 97 | R9: >90 | CCT: 2100K, 2400K, 2700K, 3000K, 3500K, 4000K.
3-Step MacAdam.
Other CRI and CCT options available on request.

Optic

Lens.
Beam angle: 21° / 29° / elliptical (22° x 47°).

Driver

Driver not included to be ordered separately.
Work with 700 mA Constant Current Driver positioned remotely.

Applications

Ideal for indirect cove illumination, it creates a wall grazing effect for architectonic surfaces. It is also a great pick also for display showcase illumination.
Application areas: Cove light, wall grainger, residential, hospitality, restaurants, museums, display showcases.

Related Products

Mini Cobra Linealuce 

Mini Cobra Flex 

Mini Cobra Flex Louvre 

Mini Cobra Pro 


Mini Cobra Pro Louvre 

Mini Cobra Linealuce Louvre | G452

Mini Cobra
Linealuce
Louvre




Min. L= 65mm (2 x LED)




Mounting options


With magnet L bracket




With mounting U clip



With magnet



Max. L= 965mm (32 x LED)

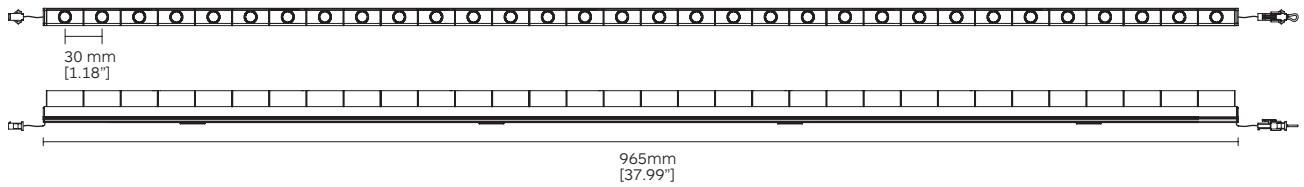

Available length codes ¹

No. of LEDs	Voltage	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	No. of LEDs	Voltage	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen
2	3.2V	2W	0065	65	2.55	180 lm	18	28.8V	18W	0545	545	21.45	1620 lm
4	6.4V	4W	0125	125	4.92	360 lm	20	32V	20W	0605	605	23.81	1800 lm
6	9.6V	6W	0185	185	7.28	540 lm	22	35.2V	22W	0665	665	26.18	1980 lm
8	12.8V	8W	0245	245	9.64	720 lm	24	38.4V	24W	0725	725	28.54	2160 lm
10	16V	10W	0305	305	12.00	900 lm	26	41.6V	26W	0785	785	30.90	2340 lm
12	19.2V	12W	0365	365	14.37	1080 lm	28	44.8V	28W	0845	845	33.26	2520 lm
14	22.4V	14W	0425	425	16.73	1260 lm	30	48V	30W	0905	905	35.62	2700 lm
16	25.6V	16W	0485	485	19.09	1440 lm	32	51.2V	32W	0965	965	37.99	2880 lm

Code ordering example: **G 4 5 2 0 0 6 5 - 9 7 2 7 2 1 0 0 1 0**

	Product code*	Length code	>CRI	CCT**	LED Power	Nominal Lumen	Beam angle (BA°)	Driver Options	Finish
Mini Cobra Linealuce Louvre	G452	Min. 0065	97	27 2700K	1W/LED	90 lm/LED	21 / 29 / EL	00 No Driver	10 ■ Black
		⋮		30 3000K					11 □ White
		Max. 0965		35 3500K					28 ■ Brass Polished
				40 4000K					35 ■ Gold
			75	21 2100K		121 lm/LED			
				24 2400K					

Notes:


¹ Information in the chart above is related to 3000K LED.

Driver Options

Constant Current

Mini Cobra Linealuce Louvre

2C07 Constant Current LED Driver. 1 Driver can drive 2-32LEDs, about 965mm Max.

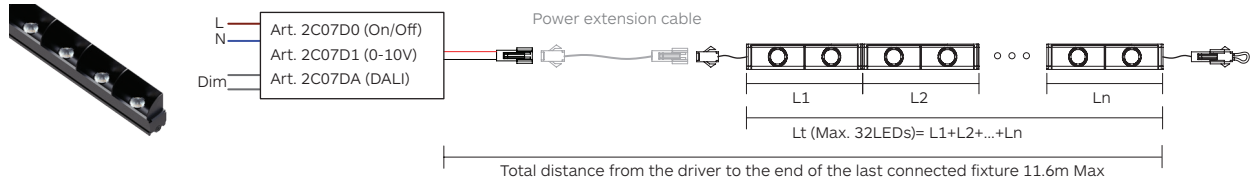

G452

Power extension cable. Art. **2C47**. 1m (if necessary).

Vin= 180-277V AC 50/60Hz
Iout= 700mA V=2-57V
P= 40W Max.
Dimensions: 123.5x81.5x23mm
IP20