

Mini Cobra Pro



Body

Surface mounted modular system in die cast aluminium. Available in different length configurations based on a 62mm link (2 LED per link) with a 60mm increment. Section 15x17mm. Its flexible structure maintain a constant 30mm pitch between the LED.

Mounting options:
Integrated magnets for easy installation.
L mounting brackets included.

*** Plastic free packaging.**

Accessories

Mounting accessories not included.
Power extension cable Art. 2C47 to be ordered separately.

Finish

Anodized black, white, brass polished or gold finish.
Other finish options available on request.

LED sources

Power LED.
CRI: 75 & 97 | R9: >90 | CCT: 2100K, 2400K, 2700K, 3000K, 3500K, 4000K.
3-Step MacAdam.
Other CRI and CCT options available on request.

Optic

Lens.
Beam angle: 21° / 31° / elliptical (22° x 47°).

Driver

Driver not included to be ordered separately.
Work with 700 mA Constant Current Driver positioned remotely.

Applications

Ideal for indirect cove illumination, it creates a wall grazing effect for columns and curved architectural surfaces. It is also a great pick also for display showcase illumination. Application areas: Cove light, wallwash, residential, hospitality, restaurants, museums, display showcases.

Related Products

Mini Cobra Linealuce



Mini Cobra Flex



Mini Cobra Linealuce Louvre



Mini Cobra Flex Louvre



Mini Cobra Pro Louvre




Mini Cobra Pro | G462




Mini Cobra Pro

Min. L= 62mm (2 x LED) 1 Link




Mounting options

With magnet & L bracket




With adjustable bracket: Narrow or Wide bracket


Art. 2D03




Art. 2D04



With magnet



Max. L= 962mm (32 x LED) 16 Links

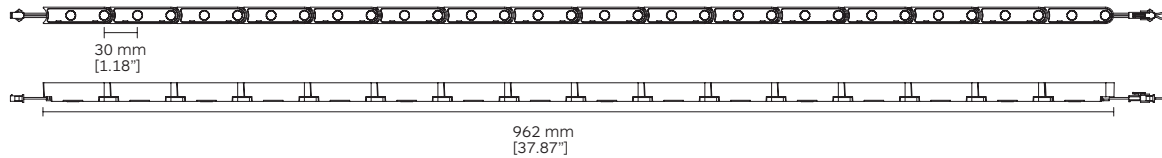

Available length codes ¹

No. of Links	Voltage	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	No. of Links	Voltage	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen
1	3.2V	2W	0062	62	2.44	180 lm	9	28.8V	18W	0542	542	21.33	1620 lm
2	6.4V	4W	0122	122	4.80	360 lm	10	32V	20W	0602	606	23.70	1800 lm
3	9.6V	6W	0182	182	7.16	540 lm	11	35.2V	22W	0662	662	26.06	1980 lm
4	12.8V	8W	0242	242	9.52	720 lm	12	38.4V	24W	0722	722	28.42	2160 lm
5	16V	10W	0302	302	11.88	900 lm	13	41.6V	26W	0782	782	30.78	2340 lm
6	19.2V	12W	0362	362	14.25	1080 lm	14	44.8V	28W	0842	842	33.14	2520 lm
7	22.4V	14W	0422	422	16.61	1260 lm	15	48V	30W	0902	902	35.51	2700 lm
8	25.6V	16W	0482	482	18.97	1440 lm	16	51.2V	32W	0962	962	37.87	2880 lm

Code ordering example: **G 4 6 2 0 0 6 2 - 9 7 2 7 2 1 0 0 1 0**

	Product code*	Length code	>CRI	CCT**	LED Power	Nominal Lumen	Beam angle (BA°)	Driver Options	Finish
Mini Cobra Pro	G462	Min. 0062	97	27 2700K	1W/LED	90 lm/LED	21 / 29 / EL	00 No Driver	10 ■ Black
		⋮		30 3000K					11 □ White
		Max. 0962		35 3500K					28 ■ Brass Polished
				40 4000K					35 ■ Gold
			75	21 2100K		121 lm/LED			
				24 2400K					

Notes:


¹ Information in the chart above is related to 3000K LED.

Driver Options

Constant Current

Mini Cobra Pro

2C07 Constant Current LED Driver. 1 Driver can drive 2-32LEDs, about 962mm Max.

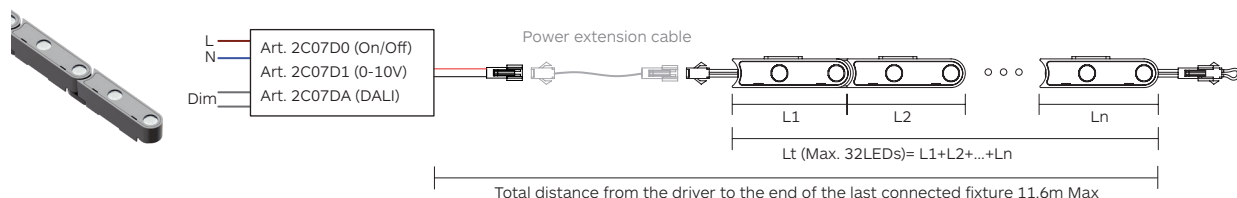

G462

Power extension cable. Art. **2C47**. 1m (if necessary).

Vin= 180-277V AC 50/60Hz
 Iout= 700mA V=2-57V
 P= 40W Max.
 Dimensions: 123.5x81.5x23mm
 IP20

Accessories



Narrow Bracket Adjustable

Finish: 10



Wide Bracket Adjustable

Finish: 10

Product / Accessories

Mini Cobra Pro

2D03

2D04

* Please refer to the user manuals for further details.

Mini Cobra Pro Louvre



Body

Surface mounted modular system in die cast aluminium.
Available in different length configurations based on a 62mm link (2 LED per link) with a 60mm increment.
Section 15x30mm.
Its flexible structure maintain a constant 30mm pitch between the LED.

Mounting options:
Integrated magnets for easy installation.
L mounting brackets included.
Integrated plastic louvre.

*** Plastic free packaging.**

Accessories

Mounting accessories not included.
Power extension cable Art. 2C47 to be ordered separately.

Finish

Anodized black, white, brass polished or gold finish.
Other finish options available on request.

LED sources

Power LED.
CRI: 75 & 97 | R9: >90 | CCT: 2100K, 2400K, 2700K, 3000K, 3500K, 4000K.
3-Step MacAdam.
Other CRI and CCT options available on request.

Optic

Lens.
Beam angle: 21° / 31° / elliptical (22° x 47°).

Driver

Driver not included to be ordered separately.
Work with 700 mA Constant Current Driver positioned remotely.

Applications

Ideal for indirect cove illumination, it creates a wall grazing effect for columns and curved architectonic surfaces. It is also a great pick also for display showcase illumination.
Application areas: Cove light, wallwash, residential, hospitality, restaurants, museums, display showcases.

Related Products

Mini Cobra Linealuce 

Mini Cobra Flex 

Mini Cobra Linealuce Louvre 

Mini Cobra Flex Louvre 


Mini Cobra Pro 

Mini Cobra Pro Louvre | G463

Mini Cobra
Pro Louvre




Min. L= 62mm (2 x LED) 1 Link




Mounting options

With magnet & L bracket




With adjustable bracket: Narrow or Wide bracket


Art. 2D03




Art. 2D04



With magnet



Max. L= 962mm (32 x LED) 16 Links

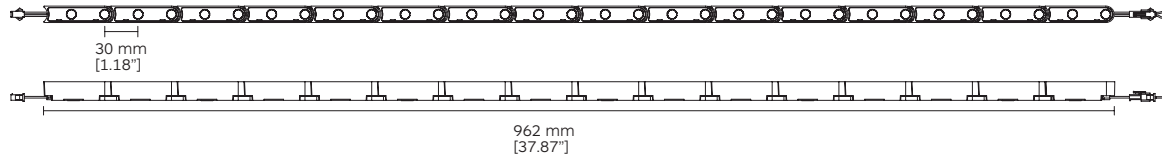

Available length codes ¹

No. of Links	Voltage	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	No. of Links	Voltage	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen
1	3.2V	2W	0062	62	2.44	180 lm	9	28.8V	18W	0542	542	21.33	1620 lm
2	6.4V	4W	0122	122	4.80	360 lm	10	32V	20W	0602	606	23.70	1800 lm
3	9.6V	6W	0182	182	7.16	540 lm	11	35.2V	22W	0662	662	26.06	1980 lm
4	12.8V	8W	0242	242	9.52	720 lm	12	38.4V	24W	0722	722	28.42	2160 lm
5	16V	10W	0302	302	11.88	900 lm	13	41.6V	26W	0782	782	30.78	2340 lm
6	19.2V	12W	0362	362	14.25	1080 lm	14	44.8V	28W	0842	842	33.14	2520 lm
7	22.4V	14W	0422	422	16.61	1260 lm	15	48V	30W	0902	902	35.51	2700 lm
8	25.6V	16W	0482	482	18.97	1440 lm	16	51.2V	32W	0962	962	37.87	2880 lm

Code ordering example: **G 4 6 3 0 0 6 2 - 9 7 2 7 2 1 0 0 1 0**

	Product code*	Length code	>CRI	CCT**	LED Power	Nominal Lumen	Beam angle (BA°)	Driver Options	Finish	
Mini Cobra Pro Louvre	G463	Min. 0062	97	27 2700K	1W/LED	90 lm/LED	21 / 31 / EL	00 No Driver	10 ■ Black	
		⋮		30 3000K					11 □ White	
		Max. 0962		35 3500K					28 ■ Brass Polished	
				40 4000K					35 ■ Gold	
				75 21 2400K					121 lm/LED	
				24 2400K						

Notes:

¹ Information in the chart above is related to 3000K LED.

Driver Options

Constant Current


Mini Cobra Pro Louvre



L
N
Dim

Art. 2C07D0 (On/Off)
Art. 2C07D1 (0-10V)
Art. 2C07DA (DALI)

2C07 Constant Current LED Driver. 1 Driver can drive 2-32LEDs, about 962mm Max.

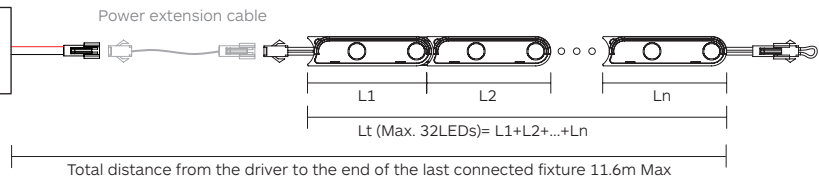

G463

Power extension cable. Art. **2C47**. 1m (if necessary).

Vin= 180-277V AC 50/60Hz
Iout= 700mA V=2-57V
P= 40W Max.
Dimensions: 123.5x81.5x23mm
IP20

Accessories



Product / Accessories

Narrow Bracket
Adjustable

Wide Bracket
Adjustable

Finish: 10

Finish: 10

Mini Cobra Pro Louvre

2D03

2D04

* Please refer to the user manuals for further details.