


ENDLESS QUAD™




Project Name:

Fixture Type:

Fixture Code:

Quantities:

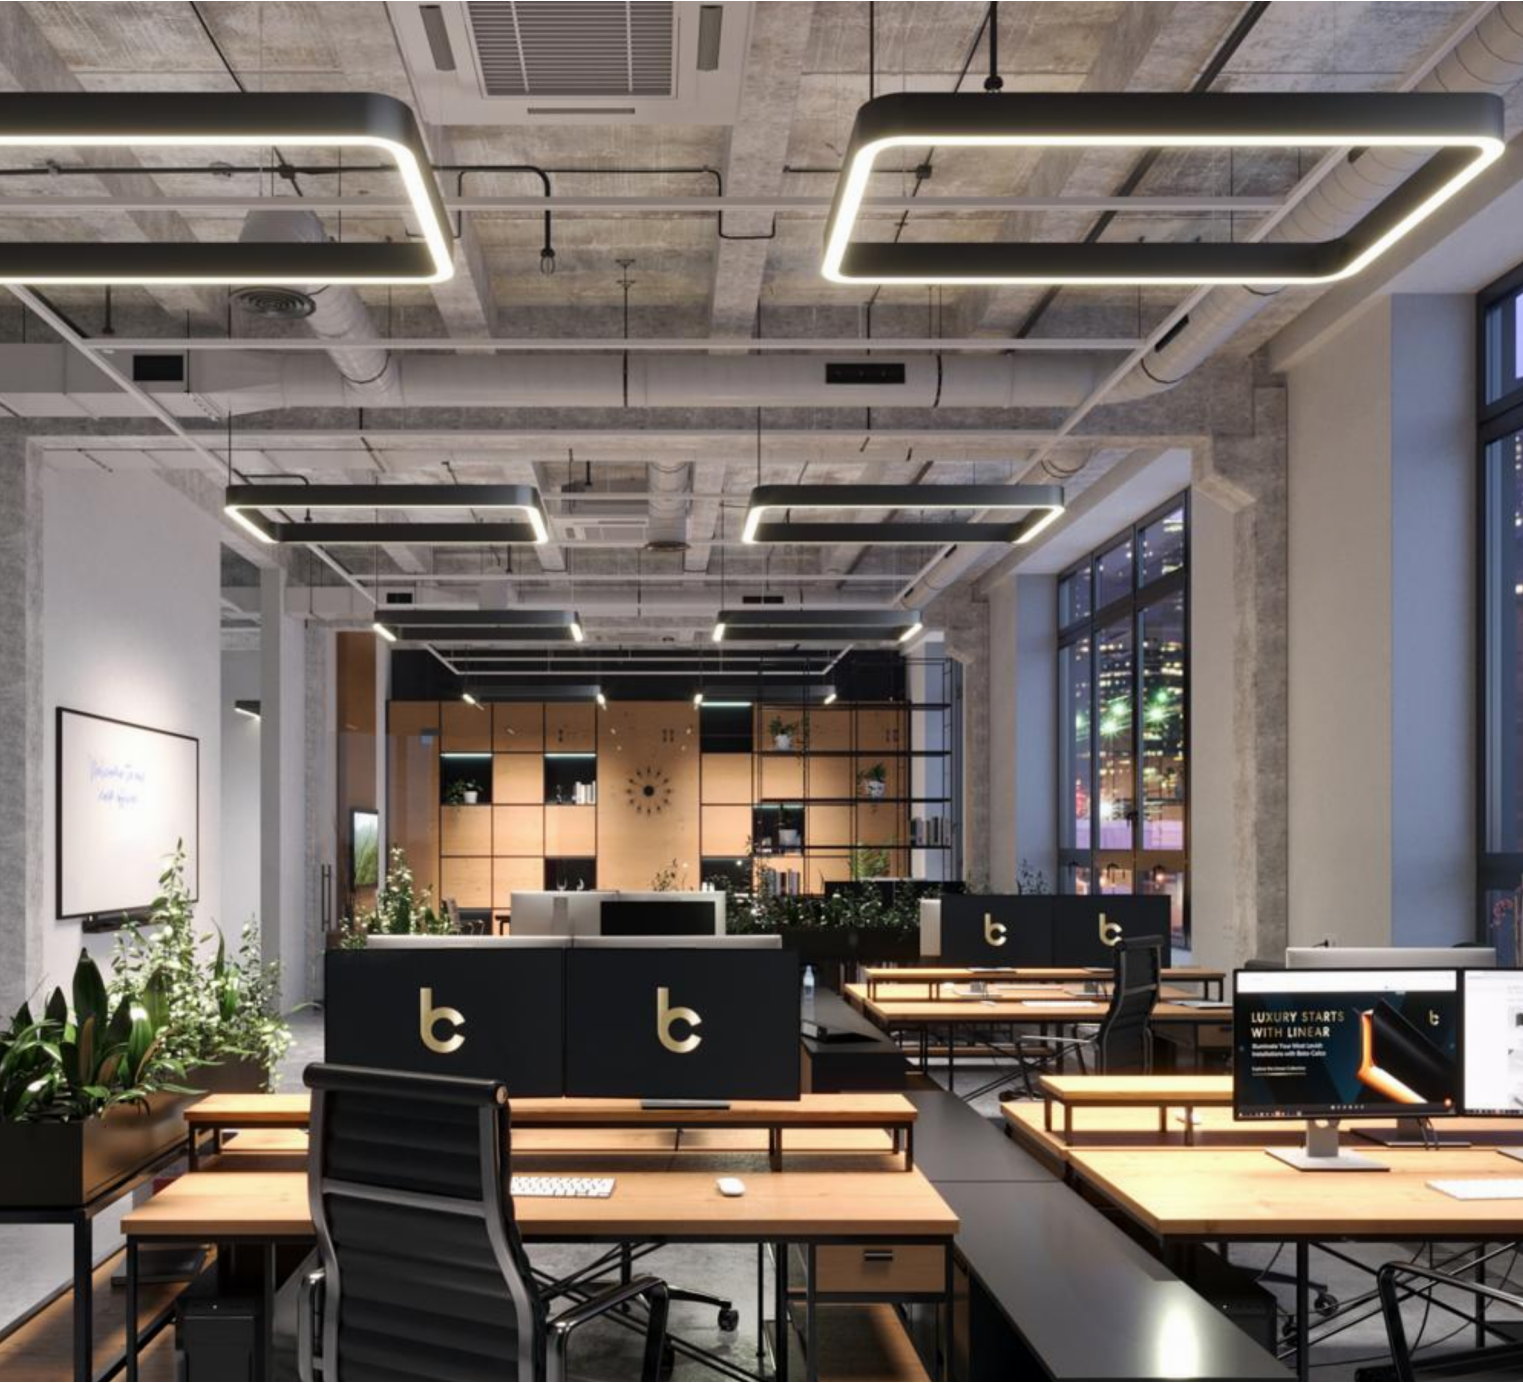

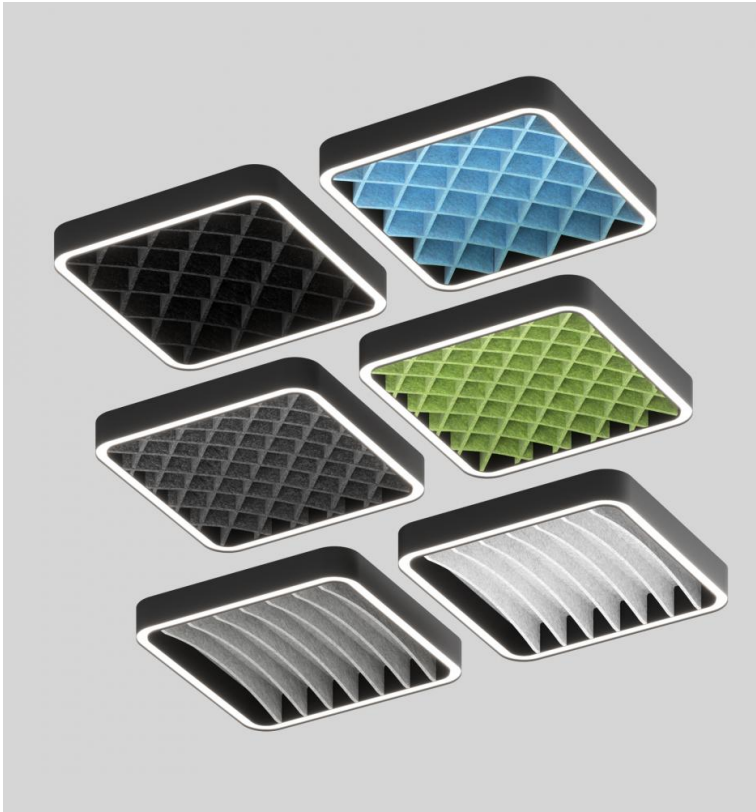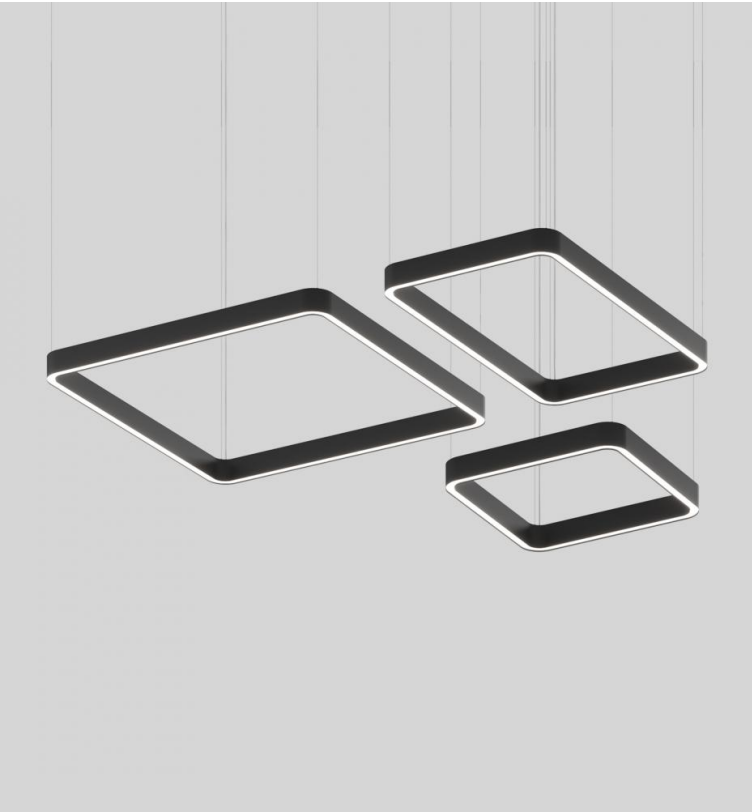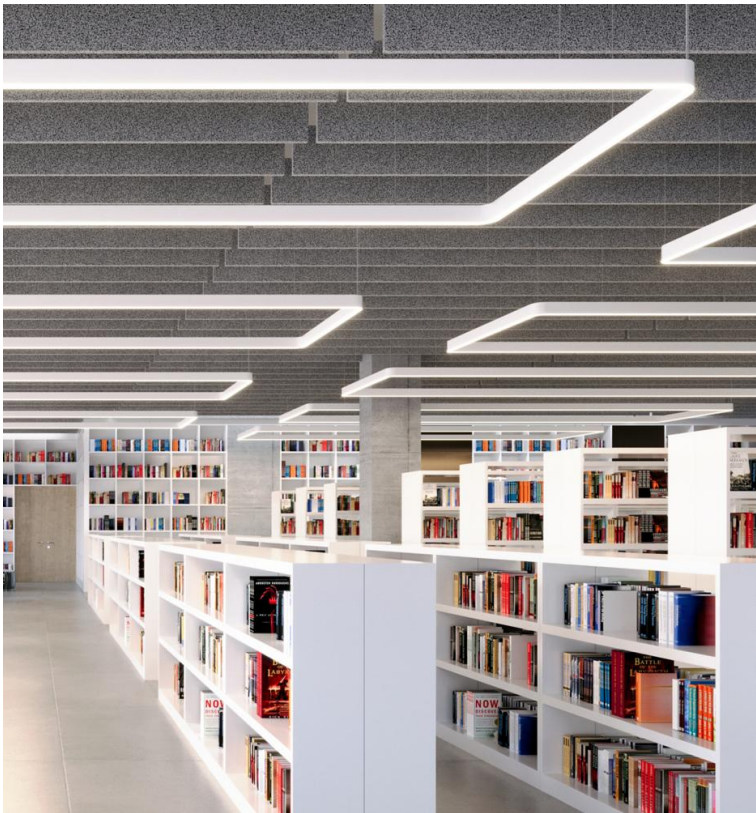

ENDLESS QUAD™

The fluid lines of the Endless linear system morph into finite rectangular forms. With warm rounded corners, **ENDLESS QUAD** adds a comforting structure to functional spaces. Simple and succinct, the quadrilateral provides geometric definition to the ceiling area that can be used to frame special areas. Crank up the design but turn down the noise with our new acoustic panel styles.

GENERAL SPECIFICATION

Body

Extruded and die-cast aluminum.

Suspension

Steel cables.

Remote Emergency system

Emergency option provides a 1.5 hour (3hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch. Maximum distance between wall/ceiling plate and luminaire is 15' (4.5m). Test switch fits a single gang box (not supplied).

Mechanical

Luminaires mount directly over J box (by others).

Reported L70 @25°C (77°F)

60,000 hrs @ 1600 lumens/ft (5200 lumens/m).

Approvals

Damp Location (Indoor use only).

Finish

Powder coated.

Power cable

Silver braided.

Drivers

HPF electronic drivers for 120-277V, 347 (EU-240V).

Diffuser

Opal acrylic.

Delivered lumens

Delivered lumens & LPW based on 4000K CRI 90+.

Designed by

Serge Cornelissen.


MOUNTING & OPTICS



Suspended Direct



Suspended Direct/Indirect



Direct



Indirect



PoE

ENDLESS QUAD™

HOW TO ORDER

A. LUMINAIRE

ENDQ1P01 34" Square Direct

ENDQ1P02 58" Square Direct

ENDQ1P03 34"x58" Direct

ENDQ2P01 34" Square Direct/Indirect

ENDQ2P02 58" Square Direct/Indirect

ENDQ2P03 34"x58" Direct/Indirect

B. LM/FT (DIRECT)

LPF030 300 lm/ft

LPF050 500 lm/ft

LPF070 700 lm/ft

Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

C. LM/FT (INDIRECT)

LPG000 Not required

LPG050 500 lm/ft

LPG070 700 lm/ft

LPG090 900 lm/ft

D. CRI

CR90 CRI 90+

E. CCT (DIRECT)

CTA30 3000K

CTA35 3500K

CTA40 4000K

F. CCT (INDIRECT)

CTB00 Not required

CTB30 3000K

CTB35 3500K

CTB40 4000K

G. DIRECT DIFFUSER

DD3 Direct light diffuser

H. INDIRECT DIFFUSER

UDO Not required

UD1 Clear diffuser (Batwing)

I. VOLTAGE

V1 120/277V

J. DIMMING

DA01 0-10V Dimming 1.0%

K. CEILING TYPE

H1 Hard ceiling ¹

¹ Designed for drywall ceilings.

L. SUSPENSION

HLA03 3ft cable suspension

HLA06 6ft cable suspension

HLA09 9ft cable suspension

M. FIXTURE FINISH

FA01 White

FA02 Black Metallic Textured ¹

FA20 Silver Metallic Textured

¹ Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

N. CANOPY FINISH

CF01 White

CF02 Black Metallic Textured

CF20 Silver Metallic Textured



ACOUSTIC PANEL STYLE

APS00 Not required
APS04 Parallel Hatch

APS01 Flat

APS02 Cross Hatch

APS03 Fine Cross Hatch

Available in 4 styles for the 34" Sq and the 34"x58" versions. The 58" Sq available with visible seams. Consult factory for details.

ACOUSTIC PANEL COLOR

AP00 Not required
AP11 Light Gray

AP04 White
AP26 Sesame Gray

AP13 Apple Green
AP27 Black

AP22 Blue

Other finishes available. Consult factory.

O. EMERGENCY

E0 Not required

E2 Emergency system - remote

Available upon request, consult factory for details.

P. CIRCUITS

CS1 Single circuit

CS2 Dual circuit

FIXTURE FINISH




¹ Black Metallic Textured available with 300 lm/ft and 500 lm/ft only.

CANOPY FINISH




ACOUSTIC PANEL STYLE

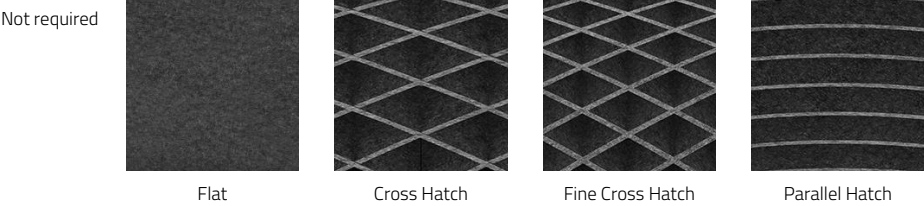

Available in 4 styles for the 34" Sq and the 34"x58" versions. The 58" Sq available with visible seams. Consult factory for details.

ACOUSTIC PANEL COLOR

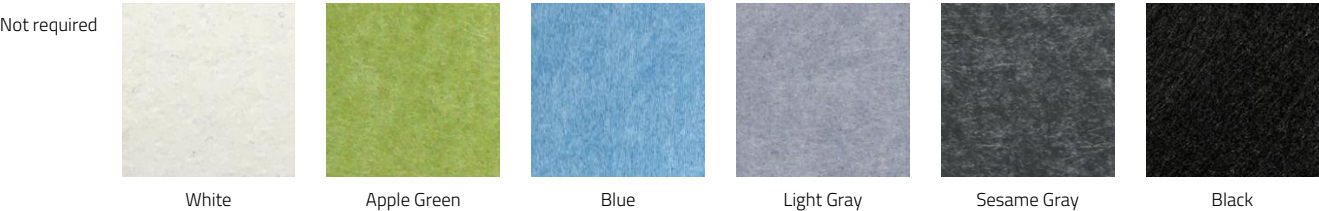



Other finishes available. Consult factory.

APPROVALS





ENDLESS QUAD™

DIMENSIONAL DIAGRAMS

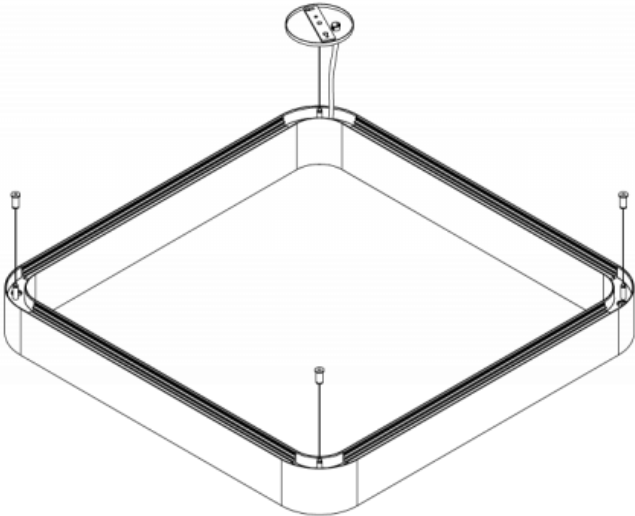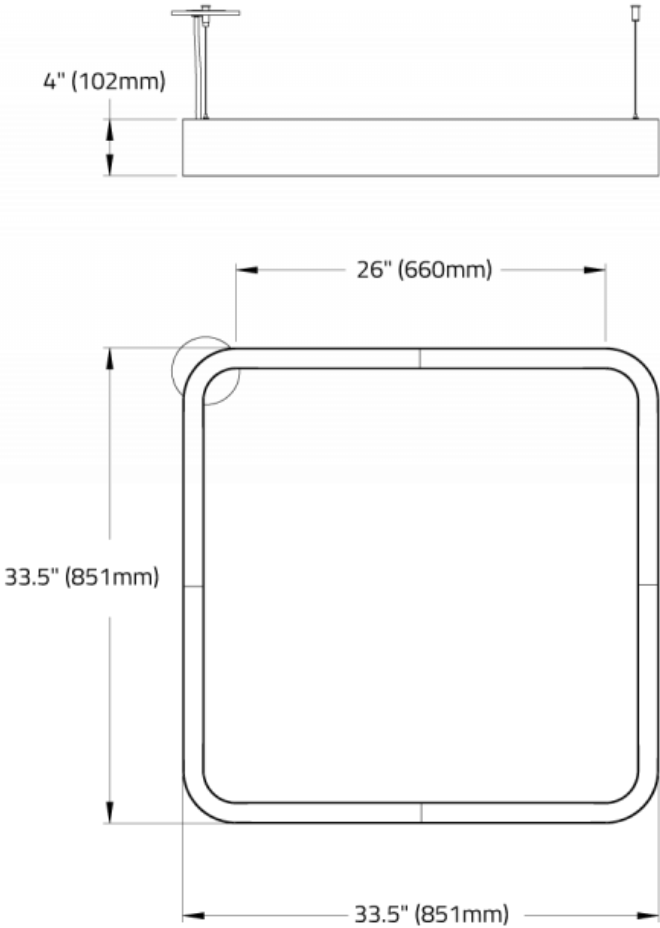

4 SUSPENSION POINTS

ENDLESS QUAD™

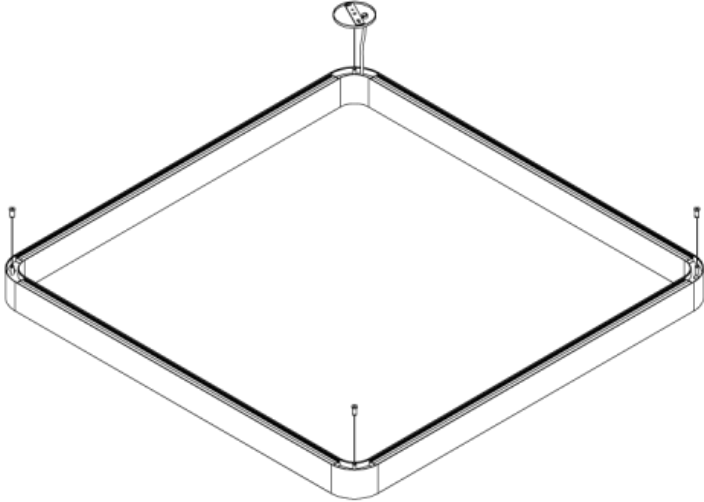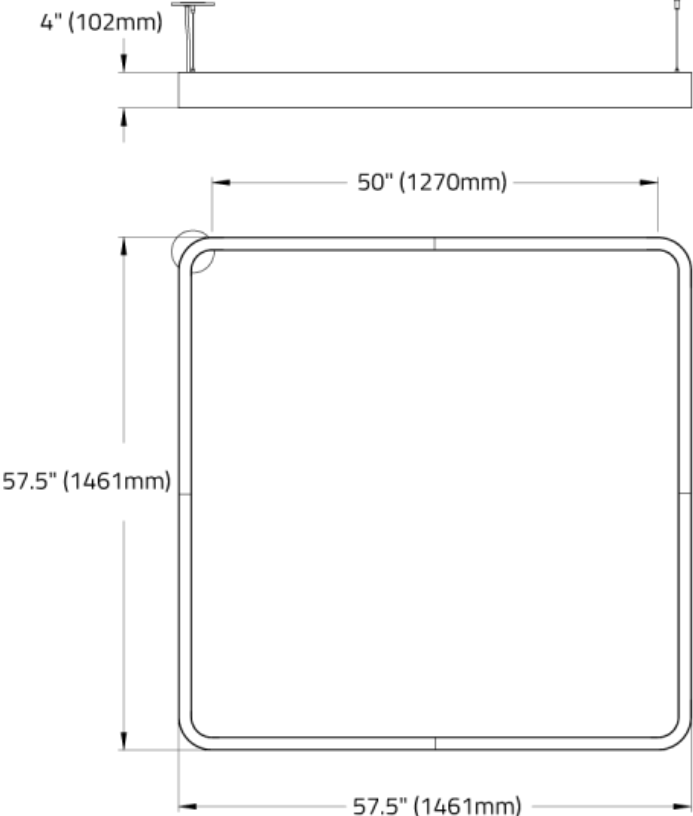

4 SUSPENSION POINTS

ENDLESS QUAD™

