




Project Name:

Fixture Type:

Fixture Code:

Quantities:



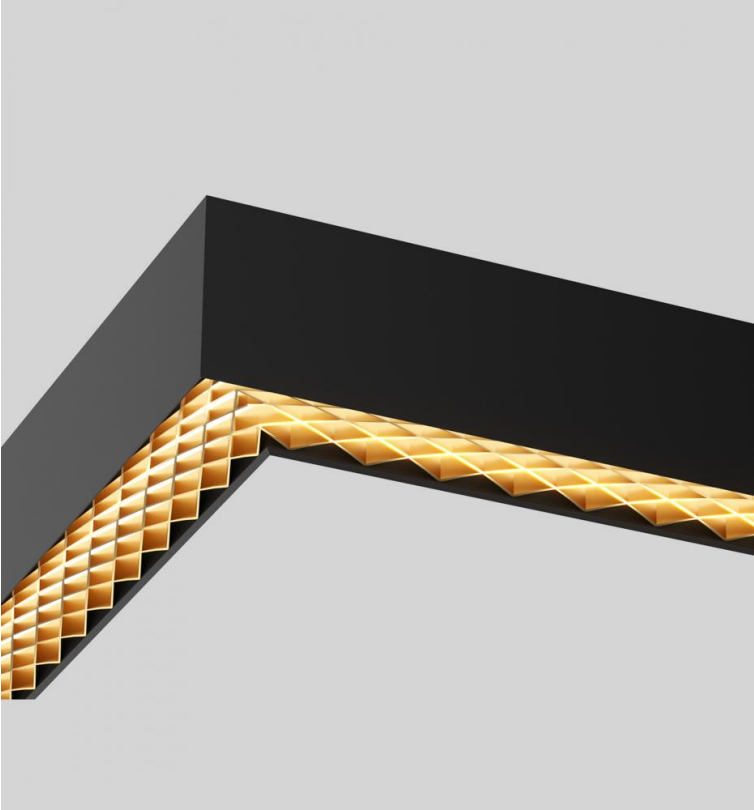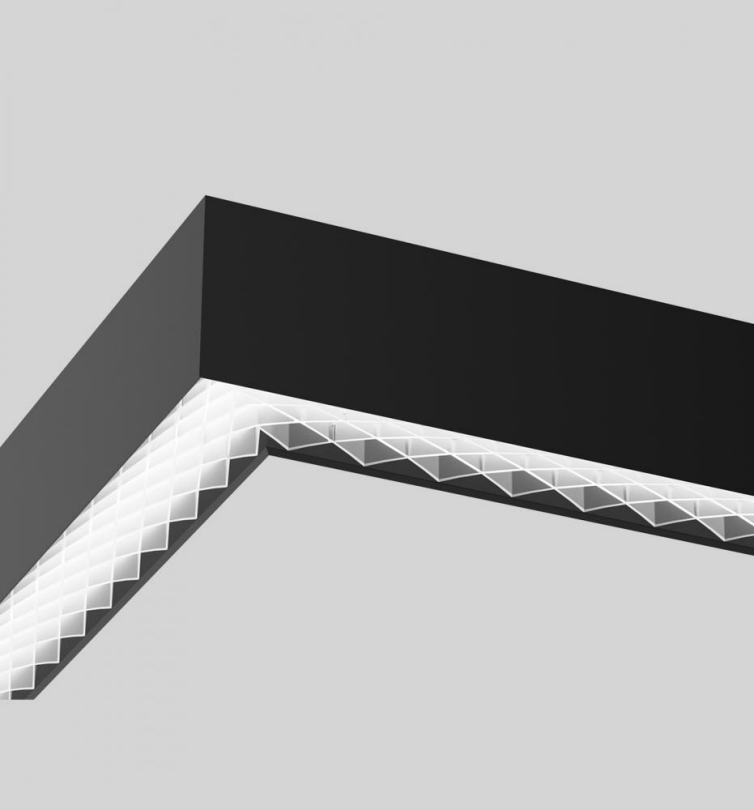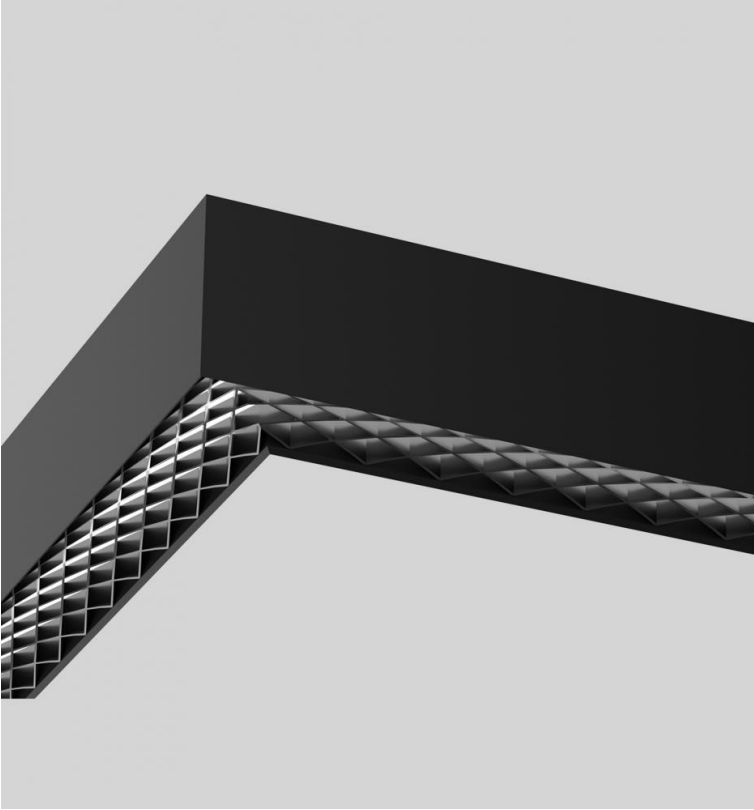

LE LOUVRE SYSTEMS™

The striking new concept in louver technology is disrupting the linear lighting category, and taking glare control to new heights. Our award-winning design with diagonal cross-hatched construction of the louver in a soft concave shape provides not just visual comfort but a touch of panache unseen in traditional linear lighting. Louvers are available in white for higher performance, black for the highest glare control, and rich satinized finishes - chrome, gold, champagne, for elegant interior designs. Build a continuous lighting plan with the new Systems option.

GENERAL SPECIFICATION

Body

Aluminum.

Suspension

Steel cables.

PoE

Can be integrated into your data network via Power over Ethernet (PoE) connectivity.

Drivers

HPF electronic drivers for 120-277V, 347V (EU-240V).

Reported L70 @25°C (77°F)

> 60,000 hrs @ 2000 lumens/ft (6000 lumens/m)

Delivered lumens

Delivered lumens & LPW based on 4000K CRI 80+

Integral Emergency system

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

Design

US Pat. No. D959,043.

Finish

Powder coated

Power cable

Silver braided.

BIOS

For circadian lighting, consult factory.

Diffuser

Opal acrylic.

Estimated L70 @25°C (77°F)

> 165,000 hrs @ 2000 lumens/ft (6000 lumens/m)

Mechanical

Luminaires mount directly over J box (by others).


Approvals

Damp Location (Indoor use only).


Designed by

Serge Cornelissen.


MOUNTING & OPTICS




Suspended Direct



Suspended Direct/Indirect



Direct



Direct-indirect



Bios



Declare



PoE



HOW TO ORDER

A. CHOOSE A MODULE

Make a selection from one of the following 7 sections. One power cord for every 50 linear feet. Connection parts for each section are shipped separately for on site assembly. Project drawings are not required for this product.

STRAIGHT SECTIONS 2FT

LE1PSL02 2ft middle section Direct

LE1PSM02 2ft middle section with power cord Direct

LE1PSN02 2ft section with end cap Direct

LE1PSP02 2ft section with end cap and power cord Direct

Available as Direct only.

STRAIGHT SECTIONS 4FT

LE1PSL04 4ft middle section Direct

LE1PSM04 4ft middle section with power cord Direct

LE1PSN04 4ft section with end cap Direct

LE1PSP04 4ft section with end cap and power cord Direct

LE2PSL04 4ft middle section Direct/Indirect

LE2PSM04 4ft middle section with power cord Direct/Indirect

LE2PSN04 4ft section with end cap Direct/Indirect

LE2PSP04 4ft section with end cap and power cord Direct/Indirect

STRAIGHT SECTION 6FT

LE1PSL06 6ft middle section Direct

LE1PSM06 6ft middle section with power cord Direct

LE1PSN06 6ft section with end cap Direct

LE1PSP06 6ft section with end cap and power cord Direct

LE2PSL06 6ft middle section Direct/Indirect

LE2PSM06 6ft middle section with power cord Direct/Indirect

LE2PSN06 6ft section with end cap Direct/Indirect

LE2PSP06 6ft section with end cap and power cord Direct/Indirect

STRAIGHT SECTION 8FT

LE1PSL08 8ft middle section Direct

LE1PSM08 8ft middle section with power cord Direct

LE1PSN08 8ft section with end cap Direct

LE1PSP08 8ft section with end cap and power cord Direct

LE2PSL08 8ft middle section Direct/Indirect

LE2PSM08 8ft middle section with power cord Direct/Indirect

LE2PSN08 8ft section with end cap Direct/Indirect

LE2PSP08 8ft section with end cap and power cord Direct/Indirect

STRAIGHT SECTION 10FT

LE1PSL10 10ft middle section Direct

LE1PSM10 10ft middle section with power cord Direct

LE1PSN10 10ft section with end cap Direct

LE1PSP10 10ft section with end cap and power cord Direct

LE2PSL10 10ft middle section Direct/Indirect

LE2PSM10 10ft middle section with power cord Direct/Indirect

LE2PSN10 10ft section with end cap Direct/Indirect

LE2PSP10 10ft section with end cap and power cord Direct/Indirect

STRAIGHT SECTION 12FT

LE1PSL12 12ft middle section Direct

LE1PSM12 12ft middle section with power cord Direct

LE1PSN12 12ft section with end cap Direct

LE1PSP12 12ft section with end cap and power cord Direct

LE2PSL12 12ft middle section Direct/Indirect

LE2PSM12 12ft middle section with power cord Direct/Indirect

LE2PSN12 12ft section with end cap Direct/Indirect

LE2PSP12 12ft section with end cap and power cord Direct/Indirect

CORNER SECTION (28"X28" L SHAPE)

LE1PSL01 Corner with no end caps Direct

LE1PSM01 Corner middle with power cord Direct

LE1PSN01 Corner with Left end cap Direct

LE1PSN03 Corner with Right end cap Direct

LE1PSP01 Corner with Left end cap and power cord Direct

LE1PSP03 Corner with Right end cap and power cord Direct

LE2PSL01 Corner with no end caps Direct/Indirect

LE2PSM01 Corner middle with power cord Direct/Indirect

LE2PSN01 Corner with Left end cap Direct/Indirect

LE2PSN03 Corner with Right end cap Direct/Indirect

LE2PSP01 Corner with Left end cap and power cord Direct/Indirect

LE2PSP03 Corner with Right end cap and power cord Direct/Indirect

B. LOUVER

LV1 Frosted

LV2 Black

LV4 Satin Chrome

LV6 Satin Gold

LV9 Satin Champagne



C. LM/FT (DIRECT)

LPF010 100 lm/ft	LPF020 200 lm/ft	LPF030 300 lm/ft	LPF040 400 lm/ft
LPF050 500 lm/ft	LPF060 600 lm/ft	LPF070 700 lm/ft	LPF080 800 lm/ft
LPF100 1000 lm/ft	LPF120 1200 lm/ft		

Lumens/ft are determined by the color of the Louver. Consult website for available lumens/ft. based on selected louver.

D. LM/FT (INDIRECT)

LPG000 Not required	LPG025 250 lm/ft	LPG050 500 lm/ft	LPG075 750 lm/ft
LPG100 1000 lm/ft	LPG120 1200 lm/ft	LPG160 1600 lm/ft	

Consult website for available lumens/ft.
All data shown based on DD3 diffuser.

E. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

F. CCT (DIRECT)

CTA30 3000K	CTA35 3500K	CTA40 4000K
--------------------	--------------------	--------------------

G. CCT (INDIRECT)

CTB00 Not required	CTB30 3000K	CTB35 3500K	CTB40 4000K
---------------------------	--------------------	--------------------	--------------------

H. DIRECT DIFFUSER

DD1 Asymmetric diffuser ¹	DD3 Diffused light diffuser ²	DD4 Comfort diffuser ³
---	---	--

¹ Recommended for use with Frosted louver only. When standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.

² High output diffuser, all data shown based on this diffuser.

³ 5% reduction from DD3. The Comfort lens provides better control and softer distribution.

I. UPLIGHT DIFFUSER

UDO Not required	UD1 Clear diffuser (Batwing distribution)
-------------------------	--

J. BLACKOUT PLATE

UB00 Not required	UB_ _ Blackout plate ¹
--------------------------	--

¹ Available on a per foot basis. May be required to prevent lighting up duct work in a loft type application.

K. VOLTAGE

V1 120/277V	V2 240V ¹	V3 347V ²	V4 Low Voltage ³
--------------------	-----------------------------	-----------------------------	------------------------------------

¹ Not available in North America.

² Only available with DA01 dimming.

³ Only available with DA45 dimming.

L. DIMMING

DA01 0-10V Dimming 1.0%	DA02 0-10V Dimming 0.1% ¹	DA20 DALI Dimming 0.1% ¹	DA21 DALI Dimming 1.0% ¹
DA30 DSI/switchDim ²	DA45 PoE ³		

¹ Not available with 347V.

² Not available in North America.

³ Only available with V4.

M. CEILING TYPE

G1 Grid ceiling ¹	H1 Hard ceiling ²
-------------------------------------	-------------------------------------

The cost for the canopies, power cables, connections mechanisms and endcaps for the fixture has been added to these items.

¹ Combo kit provided includes installation to T-bar and through tile mount.

² Designed for drywall ceilings.

N. SUSPENSION

HLA03 3ft cable suspension	HLA06 6ft cable suspension	HLA09 9ft cable suspension
-----------------------------------	-----------------------------------	-----------------------------------

O. FIXTURE FINISH

FA01 White	FA02 Black Metallic - Textured	FA20 Silver Metallic - Textured	FA25 Gold Metallic
FA27 Wood grain - Light Cherry ¹	FA28 Wood grain - Dark Walnut ¹	FA44 Midnight Blue Metallic - Textured	FA45 Copper Metallic
FA46 Charcoal Metallic - Textured	FA47 Bronze Metallic - Textured	FA52 Champagne Metallic	FA53 Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

P. CANOPY FINISH

CF01 White	CF02 Black Metallic - Textured	CF20 Silver Metallic - Textured	CF25 Gold Metallic
CF44 Midnight Blue Metallic - Textured	CF45 Copper Metallic	CF46 Charcoal Metallic - Textured	CF47 Bronze Metallic - Textured
CF52 Champagne Metallic	CF53 Red Metallic - Textured		

Q. EMERGENCY

E0 Not required	E1 Emergency system - Integral	E3 Emergency generator circuit ¹
------------------------	---------------------------------------	--

¹ A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. ¹ Available upon request, consult factory for details. Not available with 347V.

R. CIRCUITS

CS1 Single circuit	CS2 Dual circuit
---------------------------	-------------------------

¹ Independent control of uplight for LELP2P.

S. SENSORS


SR00 Not required	SR Enlighted ¹	ST Osram Encelium ¹	SV Philips ¹
--------------------------	----------------------------------	---------------------------------------	--------------------------------

¹ Specify quantity of sensor sections required based off total length of run.

Available upon request, consult factory for details. Not available with 347V.


A drawing will be required at time of ordering to determine the required location of the sensors.

LOUVER

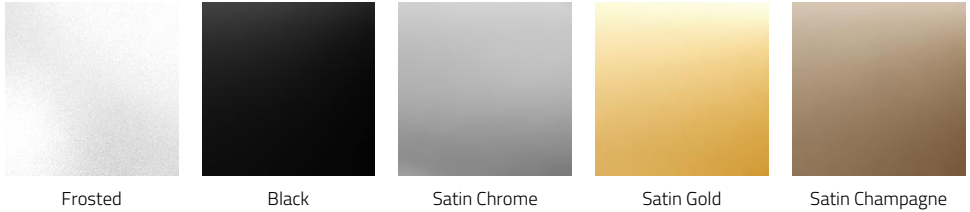

Frosted Black Satin Chrome Satin Gold Satin Champagne

FINISH

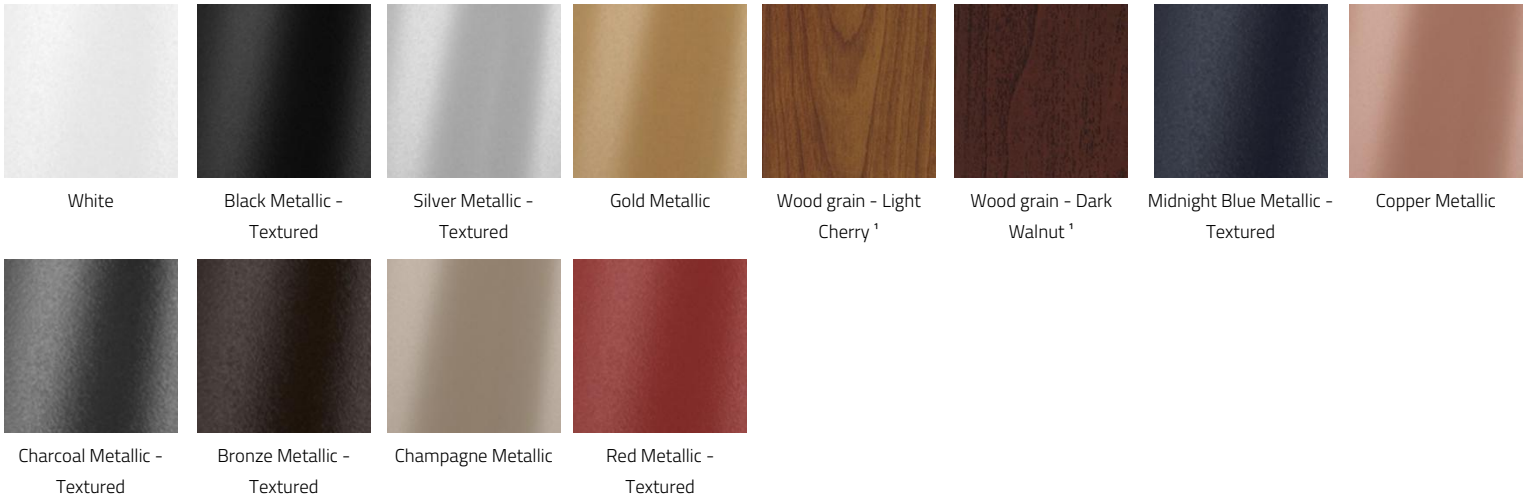


White Black Metallic - Textured Silver Metallic - Textured Gold Metallic Wood grain - Light Cherry¹ Wood grain - Dark Walnut¹ Midnight Blue Metallic - Textured Copper Metallic

Charcoal Metallic - Textured Bronze Metallic - Textured Champagne Metallic Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

CANOPY FINISH

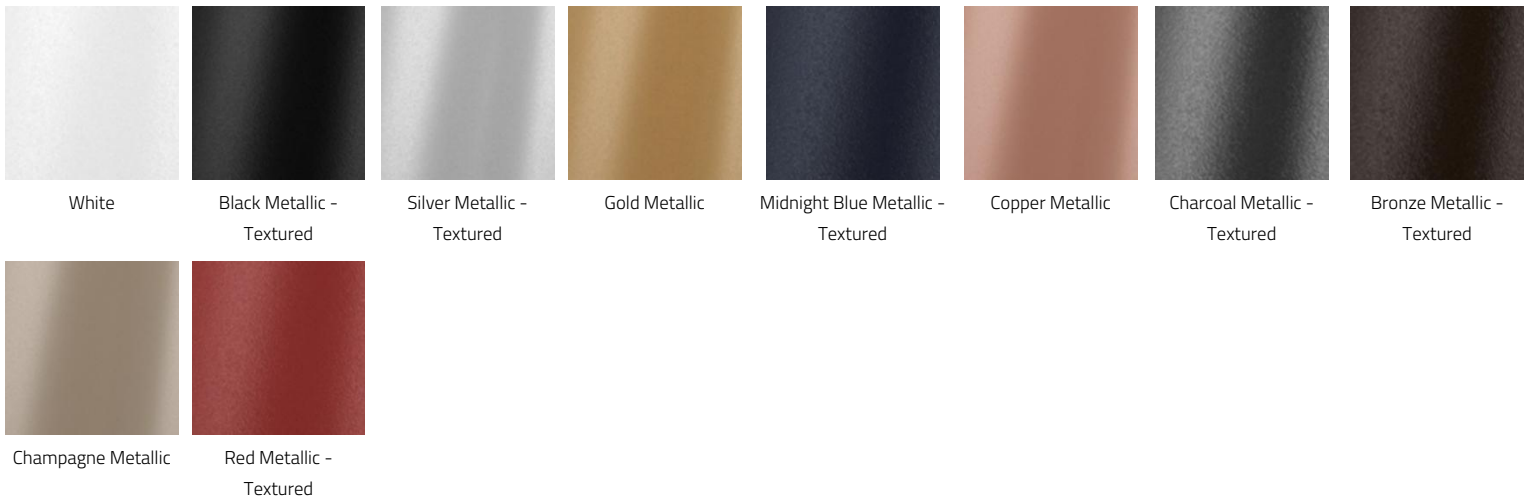



White Black Metallic - Textured Silver Metallic - Textured Gold Metallic Midnight Blue Metallic - Textured Copper Metallic Charcoal Metallic - Textured Bronze Metallic - Textured

Champagne Metallic Red Metallic - Textured



APPROVALS



DIMENSIONAL DIAGRAMS

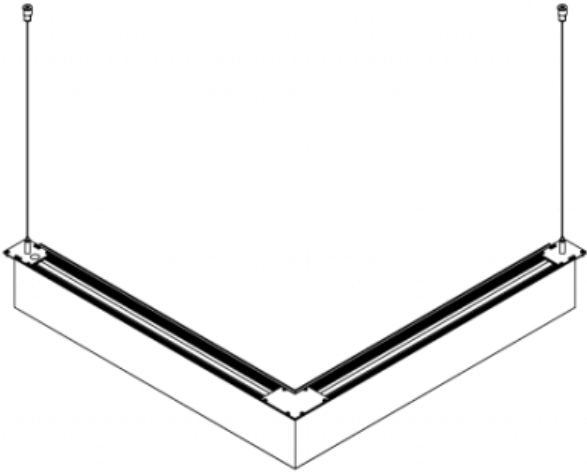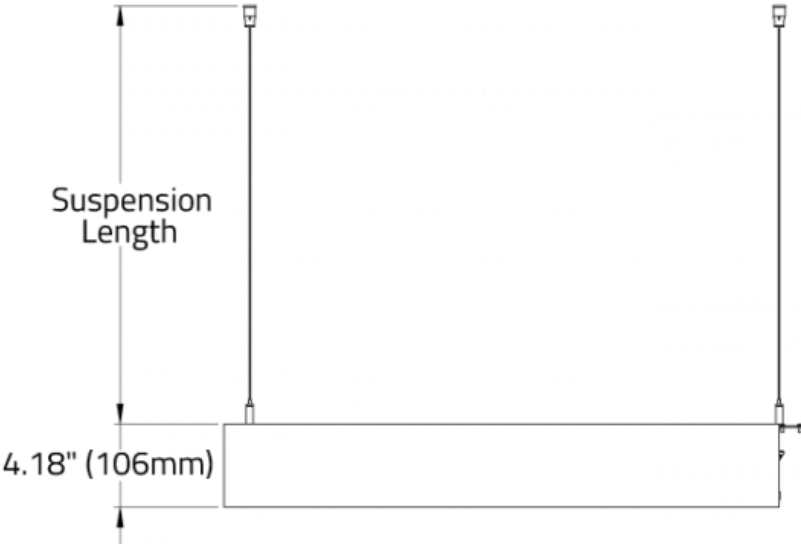

ISOMETRIC TOP VIEW

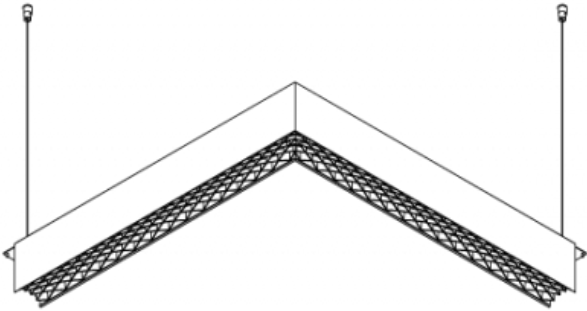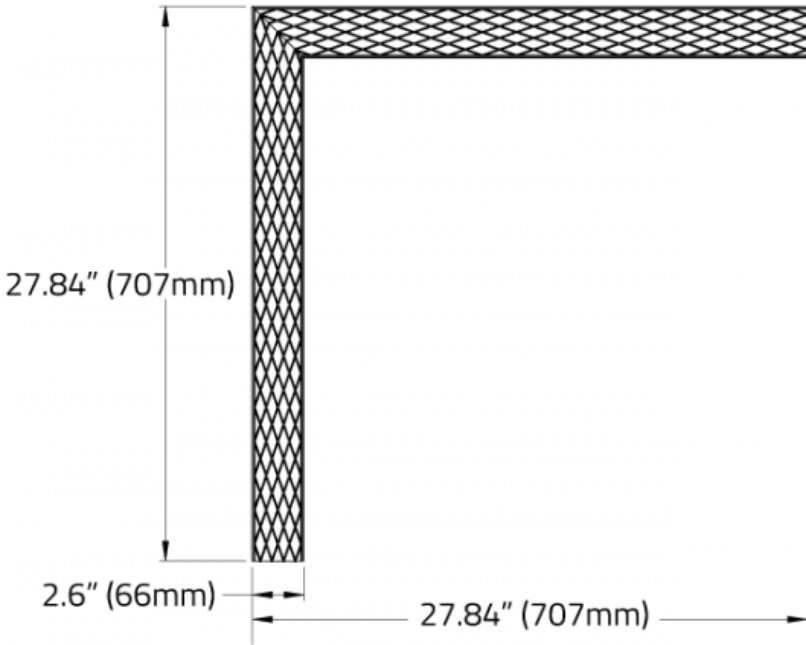

ISOMETRIC BOTTOM VIEW