

DOMINI

Durable and Reliable Bollard Family


CE UK CA IK08 IP66 



Advanced optics and strong characteristics make the DOMINI family stand out to illuminate pathways, landscaped areas, and other public spaces.

- Equipped with HEPER's AreaFlex (AFX) module
- Flexible light distribution options from Type I through Type V (AFX)
- Simple design that blends in with different types of architecture
- Single or double head layout options

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LB6047.871-EN	DOMINI AFX MIDI 1 Module	[T1] 110x45°, [T2] 134x52°, [T3] 131x60°, [T4] 114x65°, [T5] 115°	944 - 2272 lm	10 - 20 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off	5.7 kg
LB6047.872-EN	DOMINI AFX MIDI 1 Module Duo	[T1] 110x45°, [T2] 134x52°, [T3] 131x60°, [T4] 114x65°, [T5] 115°	1887 - 4544 lm	20 - 37 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off	7.43 kg

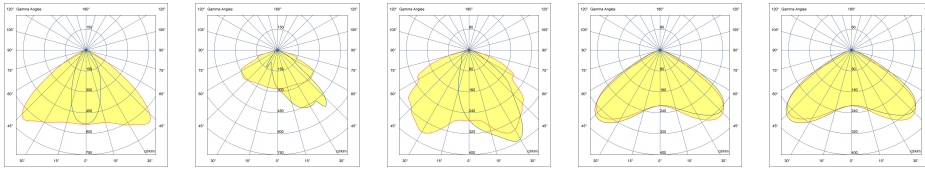


[T1] Type I, Asymmetric, Side throw
[T2] Type II, Asymmetric, Side throw
[T3] Type III, Asymmetric, Side throw
[T4] Type IV, Asymmetric, Forward throw
[T5] Type V, Symmetric

Extras

Consult the factory

Luminaire body options



120-277V
50/60Hz

DPC

UNI


120-277V 50/60Hz

DPC

Double powder coating


Accessories (To be ordered separately)

Anchorage



90AJ001

90AJ001



[HM1] Black
[HM2] Dark grey
[HM3] Anthracite grey
[HM4] Light grey
[HM5] White
[HM6] Bronze
[CC] Custom colour (Please specify RAL code)