

# HELIOS

Modern Post-top Fixture with a Traditional Touch

CE UK CA IK08 IP66 





The combination of high-performance optics and traditional looks make HELIOS stand out for the illumination tasks for modern cities, parks, and other open spaces.

- Equipped with HEPER's AreaFlex (AFX) module
- Glare minimizing PMMA diffusor
- Flexible light distribution options from Type I through Type V (AFX)
- Timeless design with traditional touches for both modern and historical sites

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LP4036.861-EN	HELIOS AFX 1 Module	[P4] 20x78°, [T1] 111x48°, [T2] 133x48°, [T2-2] 149x54°, [T3] 143x63°, [T4] 117x64°, [T5] 117°	1975 - 4540 lm	18 - 35 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI, AutoDIM, StepDIM	4.86 kg

LP4036.861

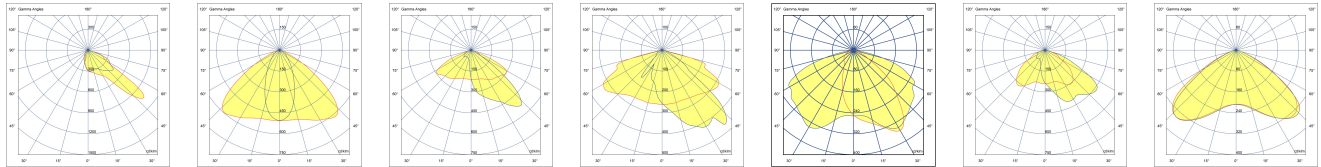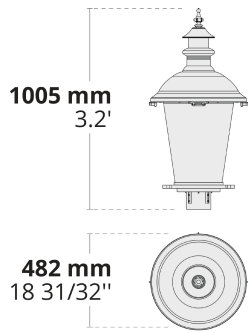

- [P4]** Special pedestrian road distribution-right side traffic
- [T1]** Type I, Asymmetric, Side throw
- [T2]** Type II, Asymmetric, Side throw
- [T2-2]** Type II, Asymmetric, Side throw
- [T3]** Type III, Asymmetric, Side throw
- [T4]** Type IV, Asymmetric, Forward throw
- [T5]** Type V, Symmetric


## Extras

Consult the factory

120-277V  
50/60Hz

UNI

120-277V 50/60Hz



- [HM1]** Black
- [HM2]** Dark grey
- [HM3]** Anthracite grey
- [HM4]** Light grey
- [HM5]** White
- [HM6]** Bronze
- [CC]** Custom colour (Please specify RAL code)

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 12.01.2024. For current version visit [heperlighting.com](http://heperlighting.com). All flux ( $\pm 7\%$  tolerance) and power values ( $\pm 10\%$  tolerance) are derived following appropriate IES, CIE, and applicable standards.