



## LED spotlight C1-WL

part number: A400016

**description:**

LED wall lamp,  
180° rotatable, 180° swivelling

**housing colour:**

aluminum anodised matte in black, silver, gold, champagne  
(other surface finishing on request)

**optics:**

10°, 15°, 20°, 35°, 45°, 80°, 46°+ 10°

**light colour (+/- 100K):**

~2,700K, ~3,000K, ~3,500K, ~4,000K, ~5,700K

high power LED, high CRI DIN EN 55015:2013,  
lifetime 50,000 hours | basis of lifetime L80B10

protection class: IP 20, protection class III, CE,  
UL Listed No. E506729 - low voltage LED luminaire

**luminous flux (~3,000 K | 20° | 500 mA):**

~150lm at ~2.1W (71 lm/W)

**power input:**

500mA (constant current)

**allowed LED driver:**

LED driver for the Micro Jolly, Mini Jolly,  
Maxi Jolly by TCI with constant current  
(other LED driver on request)


**dimming:**

external via potentiometer (incl.)


**optional accessories:**

honeycomb grid, anti-glare tube, inclined tube,  
light diffusion foil, barn doors,  
zoom optic (2° - 25°, 6° - 36°)

## dimensions

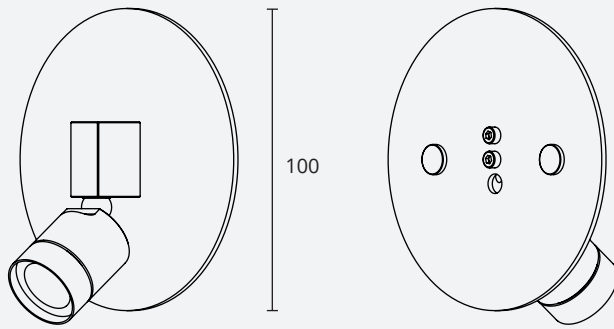

bracket


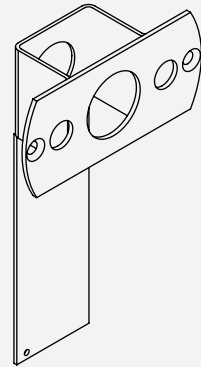


148 x 92.5 x 32  
(W x H x D)

specification in mm

## photometry

for light colour ~3,000K | standard lens 20° | 500 mA | CRI typ. 97, R9 > 90, R12 > 90 | colour variation ≤ 3 SDCM

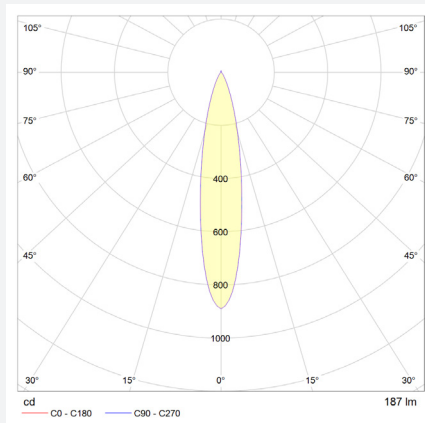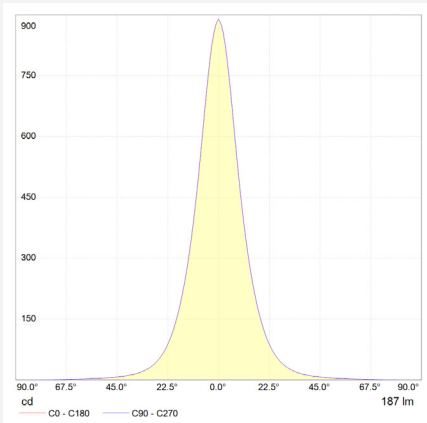

technical changes reserved | July 2023