



## LED spotlight C1-S

part number: A400017

### description:

LED spotlight for installation in display cases,  
360° rotatable, 180° swivelling,  
with screw base or magnetic base

### housing colour:

aluminum anodised matte in black, silver, gold, champagne  
(other surface finishing on request)

### optics:

10°, 15°, 20°, 35°, 45°, 80°, 46°+ 10°

### light colour (+/- 100K):

~2,700 K, ~3,000 K, ~3,500 K, ~4,000 K, ~5,700 K

### high power LED, high CRI DIN EN 55015:2013,

lifetime 50,000 hours | basis of lifetime L80B10

### protection class: IP 20, protection class III, CE,

UL Listed No. E506729 - low voltage LED luminaire

### luminous flux (~3,000 K | 20° | 500 mA):

~150 lm at ~2.1W (71 lm/W)

### power input:

500 mA (constant current)

### allowed LED driver:

LED driver for the Micro Jolly, Mini Jolly,  
Maxi Jolly by TCI with constant current  
(other LED driver on request)


### dimming:

external via potentiometer (incl.)

### optional accessories:

honeycomb grid, anti-glare tube, inclined tube,  
light diffusion foil, barn doors,  
zoom optic (2° - 25°, 6° - 36°)



## dimensions

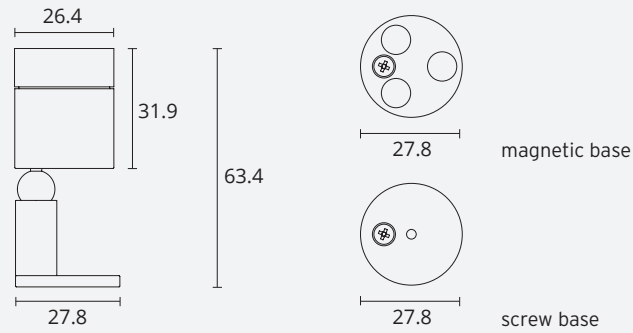

specification in mm

## photometry

for light colour ~3,000K | standard lens 20° | 500 mA | CRI typ. 97, R9 > 90, R12 > 90 | colour variation ≤ 3 SDCM

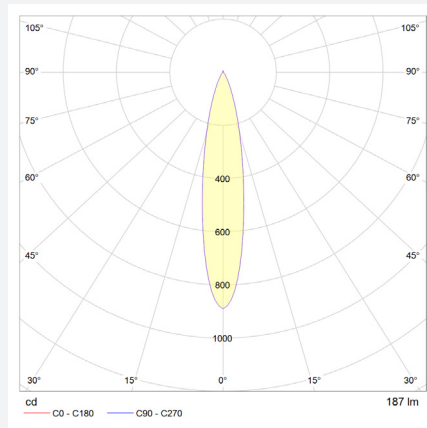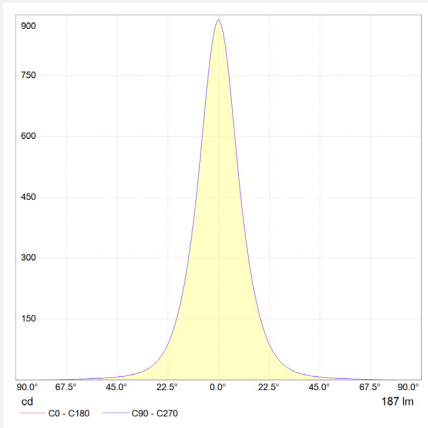

technical changes reserved | July 2023