

# PUNTO

Flexible and Reliable Floodlight Family




With its round form factor, advanced optics providing perfect beam control, and durable body PUNTO family stand out for highlighting architectural details in high-end projects.


- Equipped with HEPER's Hybrid (HYB) module [S] [N]
- 4 different light distribution options from very narrow to wide
- Well-defined beam angles with reflector and lens combined (HYB)
- +60°/-30° vertically adjustable with aim locking set screw allowing fine-tuning
- Different sizes and lumen packages in order to comply with any project needs

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LF8017.693-EN	PUNTO S	[S] 7°, [N] 26°, [MN] 42°, [M] 60°	606 - 1019 lm	10 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	1.52 kg
LF8030.693-EN	PUNTO S Ex	[S] 7°, [N] 26°, [MN] 42°, [M] 60°	606 - 1019 lm	10 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	1.57 kg
LF8018.694-EN	PUNTO	[S] 7°, [N] 26°, [MN] 42°, [M] 60°	1767 - 2981 lm	26 - 27 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	4.14 kg
LF8019.698-EN	PUNTO L	[S] 7°, [N] 26°, [MN] 42°, [M] 60°	4242 - 7060 lm	58 - 60 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	6.56 kg


LF8017.693





LF8018.694



LF8019.698

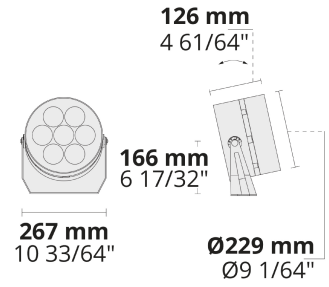

LF8030.693

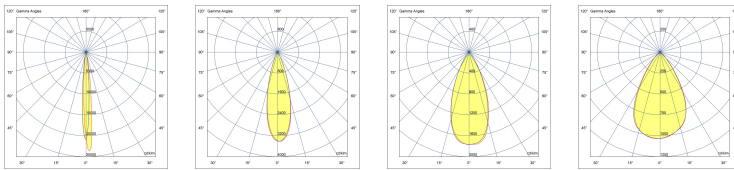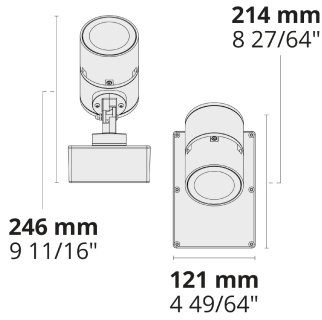

[S] Spot  
[N] Narrow  
[MN] Medium narrow  
[M] Medium

## Extras

Consult the factory

Luminaire body options

120-277V  
50/60Hz

DPC

UNI

120-277V 50/60Hz

DPC

Double powder  
coating

## Accessories (To be ordered separately)

Mounting accessories


Optical accessories

Optical accessories

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com


We reserve the right to change specifications  
without prior written notice. Edition: 26.01.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All  
flux (±%7 tolerance) and power values (±%10  
tolerance) are derived following appropriate IES,  
CIE, and applicable standards.



**Spike**  
160405040




**Visor for PUNTO S**  
007502282



**Snoot for PUNTO**  
007502216


Optical accessories




**Snoot for PUNTO L**  
007502177




**[HM1]**  
Black



**[HM2]**  
Dark grey



**[HM3]**  
Anthracite  
grey



**[HM4]**  
Light grey



**[HM5]**  
White



**[HM6]**  
Bronze



**[CC]**  
Custom  
colour  
(Please  
specify RAL  
code)