

PINA W

Simple and Functional Product Family

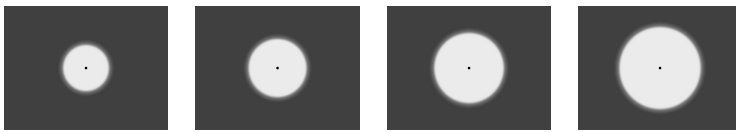
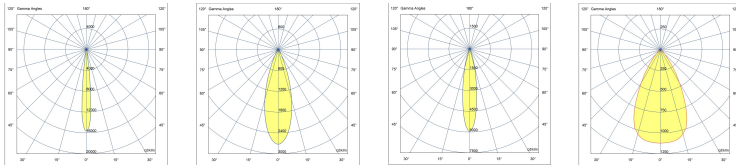


CE UK CA IK06 IP65



Small form factor and flexible optics make PINA W stand out to highlight architectural details in modern projects.

- Equipped with GU10 LED light source
- 4 different light distribution options from very narrow to wide
- Easy installation and maintenance

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LW8033.003-EN	PINA W Duo	[VN] 10°, [N] 25°, [MN] 36°, [M] 60°	735 - 820 lm	15 W	2700 K CRI 90, 3000 K CRI 90, 4000 K CRI 90	On/Off	0.43 kg
LW8034.003-EN	PINA W	[VN] 10°, [N] 25°, [MN] 36°, [M] 60°	368 - 410 lm	7.5 W	2700 K CRI 90, 3000 K CRI 90, 4000 K CRI 90	On/Off	0.71 kg

**[VN]**

Very narrow

[N]

Narrow

[MN]

Medium narrow

[M]

Medium


Extras

Consult the factory

120-277V
50/60Hz

UNI

120-277V 50/60Hz

**[HM1]**

Black

[HM2]

Dark grey

[HM3]Anthracite
grey**[HM4]**

Light grey

[HM5]

White

[HM6]

Bronze

[CC]Custom
colour
(Please
specify RAL
code)