


ZEROX

Robust In-ground Family with Impressive Optics



IK10 IP67

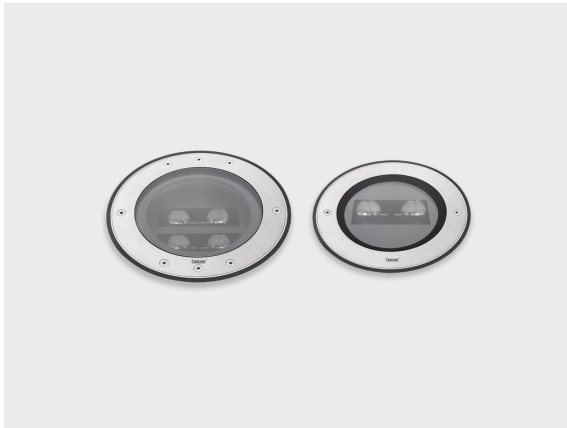

Multiple sizes, versatile light distribution options, and hardwearing characteristics make the "walk-over" ZEROX family stand out for uplighting, facade washing, and grazing applications in high-end architectural projects.

- 1 to 6 light distribution ratio with a uniform wall-wash effect (DYN)
- Equipped with HEPER's Dyno (DYN) or Hybrid (HYB) module
- Perfect beam control through multifaceted reflectors (HYB)
- Superior glare management with hidden light source (DYN)
- Extra narrow or medium beam angle options (HYB)
- Easy installation with in-ground housing and IP rated connectors
- Drive-over in-ground luminaires with high light output


Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LR9005.524-EN	ZEROX Dyno	[WW] 49x33°,	793 - 930 lm	10 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	6.85 kg
LR9005.695-EN	ZEROX Hybrid	[S] 7°, [N] 26°,	1914 - 3215 lm	18 - 28 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	6.85 kg
LR9016.521-EN	ZEROX S Dyno	[WW] 46x25°,	294 - 345 lm	4 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	2.81 kg
LR9016.693-EN	ZEROX S Hybrid	[S] 7°, [N] 26°,	476 - 1019 lm	5 - 10 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	2.81 kg
LR9017.522-EN	ZEROX M Dyno	[WW] 35x28°,	448 - 525 lm	5 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	4.06 kg
LR9017.690-EN	ZEROX M Hybrid	[S] 7°, [N] 26°,	956 - 2038 lm	10 - 18 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off, DALI	4.06 kg

LR9005.524 / LR9005.695

LR9016.521 / LR9016.693

LR9017.522 / LR9017.690

Ø281 mm
Ø11 1/16"




382 mm
15 3/64"



Ø253 mm
Ø9 61/64"

Ø225 mm
Ø8 55/64"




251 mm
9 7/8"



Ø166 mm
Ø6 17/32"


Ø275 mm
Ø10 53/64"




240 mm
9 29/64"



Ø211 mm
Ø8 5/16"

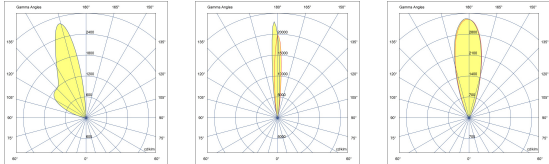

[WW]
Wall-wash



[S]
Spot



[N]
Narrow

Extras

Consult the factory

120-277V
50/60Hz

UNI

120-277V 50/60Hz


Accessories (To be ordered separately)

Mounting accessories




Case removing
vacuum
160404012

Mounting accessories



Connector set - 5-
pole
141407400

Mounting accessories



Junction Box
141901135

Mounting accessories


Mounting accessories

Mounting accessories

HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com


We reserve the right to change specifications without prior written notice. Edition: 26.01.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.



**Plastic case for
ZEROX**
007501028



Junction box
141901059



**Plastic case for
ZEROX S**
007502091

Mounting accessories



**Plastic case for
ZEROX M**
007502092



[SS]
Stainless
steel