


PRODUCT INFORMATION

Description DYNAMIC FLEX | COLOUR PIXEL GROUP DL 20PX | 120LED/M RGB | 23MM | IP20 | 24V | 80CRI | 28W | 655LM | 50MM CUT | SPI UCS2903 | 1000MM

Product Code DFG120DL-RX-0001

Product Range Dynamic Flex

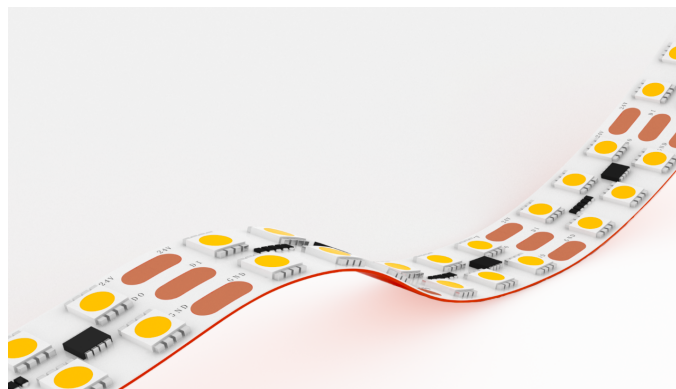

PRODUCT SPECIFICATION

Dimensions H2.00/W23.00mm

Cutting Interval 50mm

LED Pitch 8.33mm

Bend Direction TV

Minimum Bend Radius 30mm

Colour Temperature RGB

Bin/step 3SDCM

CRI Rating

Lifetime > 50,000 h

Operating Temp -40°C to 45°C

IP Rating IP20

Mounting 3M VHB backing tape

Connection Hardwire tails or male/female connectors

Control Protocol SPI UCS2903

PERFORMANCE DATA (for 1000mm)

Power Consumption 28.00 W

Supply Voltage 24V DC


Supply Current 1.17 A

Luminous Flux 655.00lm/m

Lumen Efficiency 23.00lm/w

Max Power Length 3000mm

Beam Angle 120°

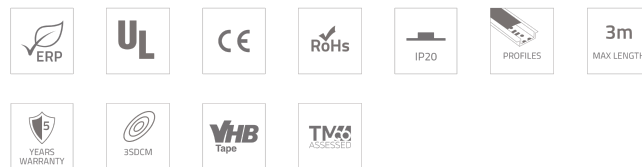

TECHNICAL DRAWING

