


MOTO-GIMBALO SURFACE

ORDERING CODE: M103BC33-903015DC10

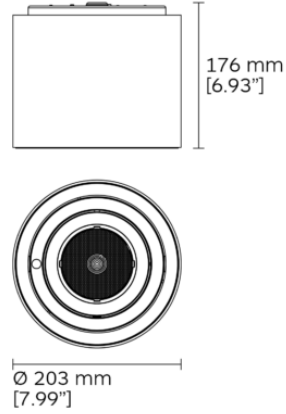

DESCRIPTION

Motorized ceiling mounted downlight. Light head and body are made of cast aluminium. Deep regressed light head position to minimize the glare. Moto-Gimbalo Surface have a diameter of 203mm and a height of 176mm. Two remote controlled DC motors drive the movements of the fixture, which is tiltable vertically 0-40° in all direction on a dual axis gimbals. The movements of the fixture, as well as the intensity and the colour tuning of the light, are remote controlled via CASAMBI™ application.

MOUNTING

Surface Mounted

OPTIC

Lens.
Beam Angle: Narrow / Medium / Wide.

DIMMING OPTIONS

DC - CASAMBI



LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE:	LED Built-in with body - High Efficacy BC33 - LED
SDCM:	3-step MacAdam
COLOR TEMPERATURE:	30 - 3000K
CRI:	90
IP:	20
LED POWER:	17
NOMINAL LUMEN:	1934
SYSTEM POWER:	20
DELIVERED LUMEN:	1829
BEAM ANGLE (BA°):	15

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DIMMING OPTIONS	FINISH
M103	BC33	-	90	30	15	DC	10 - Black

NOTES:

For other CCT options, Tuneable White (TW) version please contact us.
PATENTED