




Project: TEM Head Office, Catez, Slovenia



NEKO / FUSION

- Hohe Lichtplanungsflexibilität mit verschiedenen Grössen von Lichtmodulen
 - Schmale LED-Downlights für reinen Minimalismus
 - Bester Blendschutz mit hoher Leistung und gutem Sehkomfort
 - Fix und schwenkbar, Wall Washer, Allgemeinbeleuchtung, Spot und rahmenlose Version verfügbar
 - 5 Jahre Garantie
-
- Create a circle of light from a line of LED Downlights
 - A narrow line of nano LED Downlights for pure minimalism
 - Superior glare control for high performance and visual comfort
 - Fixed, Adjustable, Wall Washer, General light, Spotlight and trimless versions for choice
 - Five-year guarantee
- 



NEKO / FUSION
Linear Downlight Series

FIXED

ADJUSTABLE

WALL WASHER



FF1 / 1 LED / 2W / 170 lm



FA5 / 5 LED / 11W / 900 lm



FW5 / 5 LED / 11W / 600 lm



FF2 / 2 LED / 4W / 350 lm




FA10 / 10 LED / 22W / 1800 lm



FW10 / 10 LED / 22W / 1200 lm



FF3 / 3 LED / 7W / 550 lm



FF5 / 5 LED / 11W / 900 lm



FF10 / 10 LED / 22W / 1800 lm

Secondary Reflector

Beam



BLACK



SPECULAR



Medium 24°



Wide 40°

GENERAL LIGHT

SPOTLIGHT

TRIMLESS



144X37 FG5 / 5 LED / 11W / 400 lm



62X37 FS1 / 1 LED / 2W / 170 lm



152X44 FFT5 / 5 LED / 11W / 900 lm



282X37 FG10 / 10 LED / 22W / 950 lm



90X37 FS2 / 2 LED / 4W / 350 lm



290X44 FFT10 / 10 LED / 22W / 1800 lm



144X37 FS3 / 3 LED / 7W / 550 lm



152X44 FWT5 / 5 LED / 11W / 600 lm



144X37 FF3-FS1 / 4 LED / 9W / 700 lm



290X44 FWT10 / 10 LED / 22W / 1200 lm



282X37 FS6 / 6 LED / 14W / 1050 lm




152X44 FGT5 / 5 LED / 11W / 400 lm



282X37 FF6-FS2 / 8 LED / 18W / 1400 lm



290X44 FGT10 / 10 LED / 22W / 950 lm

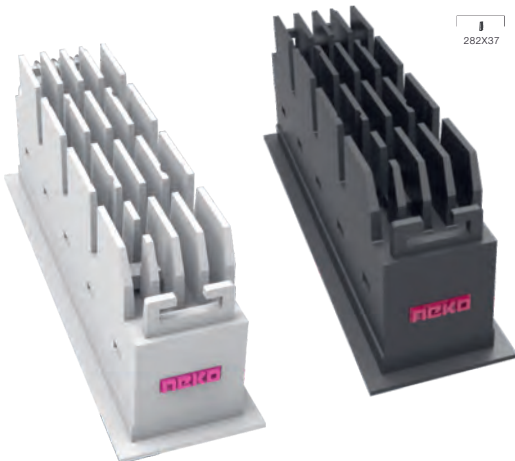

152X44 FST3 / 3 LED / 7W / 550 lm



290X44 FST6 / 6 LED / 14W / 1050 lm

NEKO / FUSION
Fixed Series LED Downlight



Black Reflector



1 LED / 2W / 170lm



2 LED / 4W / 350lm



3 LED / 7W / 550lm



5 LED / 11W / 900lm



10 LED / 22W / 1800lm

Specular Reflector



1 LED / 2W / 200lm



2 LED / 4W / 400lm



3 LED / 7W / 600lm



5 LED / 11W / 1050lm



10 LED / 22W / 2100lm

Secondary Reflector




Black



Specular








Beam



Medium 24°






Wide 40°

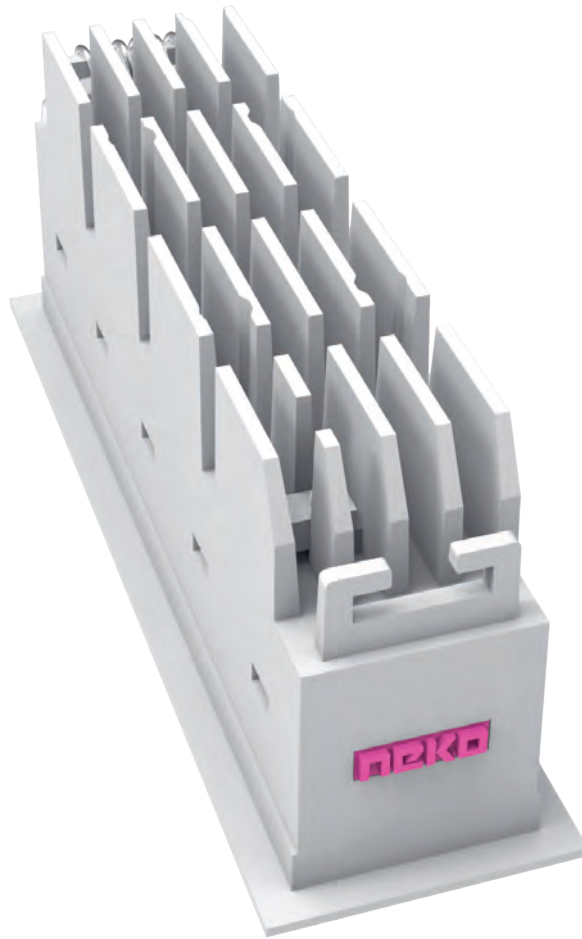





NEKO / FUSION/FF1
Fixed LED Downlight



2W CRI90 CRI80 2700K 3000K 4000K 24° 40° OSRAM 50,000h@L80B10 UGR < 10 IP20 5 YEARS GUARANTEE CB CE C UL US LISTED



	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
 Black Reflector	2 W	3 W	3 V	700 mA	80	2700K	24°	220lm	160lm	FF1-8272402X-WB	
							40°	220lm	160lm	FF1-8274002X-WB	
							3000K	24°	250lm	170lm	FF1-8302402X-WB
								40°	250lm	170lm	FF1-8304002X-WB
							4000K	24°	280lm	180lm	FF1-8402402X-WB
								40°	280lm	180lm	FF1-8404002X-WB
 Black Reflector	2 W	3 W	3 V	700 mA	80	2700K	24°	220lm	160lm	FF1-8272402X-BB	
							40°	220lm	160lm	FF1-8274002X-BB	
							3000K	24°	250lm	170lm	FF1-8302402X-BB
								40°	250lm	170lm	FF1-8304002X-BB
							4000K	24°	280lm	180lm	FF1-8402402X-BB
								40°	280lm	180lm	FF1-8404002X-BB
 Specular Reflector	2 W	3 W	3 V	700 mA	80	2700K	24°	220lm	180lm	FF1-8272402X-WS	
							40°	220lm	180lm	FF1-8274002X-WS	
							3000K	24°	250lm	200lm	FF1-8302402X-WS
								40°	250lm	200lm	FF1-8304002X-WS
							4000K	24°	280lm	220lm	FF1-8402402X-WS
								40°	280lm	220lm	FF1-8404002X-WS
 Specular Reflector	2 W	3 W	3 V	700 mA	80	2700K	24°	220lm	180lm	FF1-8272402X-BS	
							40°	220lm	180lm	FF1-8274002X-BS	
							3000K	24°	250lm	200lm	FF1-8302402X-BS
								40°	250lm	200lm	FF1-8304002X-BS
							4000K	24°	280lm	220lm	FF1-8402402X-BS
								40°	280lm	220lm	FF1-8404002X-BS

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Project: Muyang Museum, China



NEKO / FUSION / FF2
Fixed LED Downlight



4W CRI90 2700K 24° OSRAM UGR IP20 CB CE US LISTED



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	330lm	FF2-8272404X-WB						
						40°	450lm	330lm	FF2-8274004X-WB						
						3000K	24°	500lm	350lm	FF2-8302404X-WB					
							40°	500lm	350lm	FF2-8304004X-WB					
						4000K	24°	550lm	380lm	FF2-8402404X-WB					
							40°	550lm	380lm	FF2-8404004X-WB					
						4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	330lm	FF2-8272404X-BB
												40°	450lm	330lm	FF2-8274004X-BB
3000K	24°	500lm	350lm	FF2-8302404X-BB											
	40°	500lm	350lm	FF2-8304004X-BB											
4000K	24°	550lm	380lm	FF2-8402404X-BB											
	40°	550lm	380lm	FF2-8404004X-BB											
4 W	6 W	6 V	700 mA	80	2700K							24°	450lm	380lm	FF2-8272404X-WS
												40°	450lm	380lm	FF2-8274004X-WS
						3000K	24°	500lm	400lm	FF2-8302404X-WS					
							40°	500lm	400lm	FF2-8304004X-WS					
						4000K	24°	550lm	440lm	FF2-8402404X-WS					
							40°	550lm	440lm	FF2-8404004X-WS					
						4 W	6 W	6 V	700 mA	80	2700K	24°	450lm	380lm	FF2-8272404X-BS
												40°	450lm	380lm	FF2-8274004X-BS
3000K	24°	500lm	400lm	FF2-8302404X-BS											
	40°	500lm	400lm	FF2-8304004X-BS											
4000K	24°	550lm	440lm	FF2-8402404X-BS											
	40°	550lm	440lm	FF2-8404004X-BS											

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Project: Bvlgari Hotel, Shanghai, China



NEKO / FUSION / FF3
Fixed LED Downlight



7W CRI90 2700K 24° OSRAM UGR < 10 IP20 5 YEARS GUARANTEE CB CE C UL LISTED US



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	500lm	FF3-8272407X-WB						
						40°	700lm	500lm	FF3-8274007X-WB						
						3000K	24°	750lm	550lm	FF3-8302407X-WB					
							40°	750lm	550lm	FF3-8304007X-WB					
						4000K	24°	800lm	600lm	FF3-8402407X-WB					
							40°	800lm	600lm	FF3-8404007X-WB					
						7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	500lm	FF3-8272407X-BB
												40°	700lm	500lm	FF3-8274007X-BB
3000K	24°	750lm	550lm	FF3-8302407X-BB											
	40°	750lm	550lm	FF3-8304007X-BB											
4000K	24°	800lm	600lm	FF3-8402407X-BB											
	40°	800lm	600lm	FF3-8404007X-BB											
7 W	9 W	9 V	700 mA	80	2700K							24°	700lm	550lm	FF3-8272407X-WS
												40°	700lm	550lm	FF3-8274007X-WS
						3000K	24°	750lm	600lm	FF3-8302407X-WS					
							40°	750lm	600lm	FF3-8304007X-WS					
						4000K	24°	800lm	650lm	FF3-8402407X-WS					
							40°	800lm	650lm	FF3-8404007X-WS					
						7 W	9 W	9 V	700 mA	80	2700K	24°	700lm	550lm	FF3-8272407X-BS
												40°	700lm	550lm	FF3-8274007X-BS
3000K	24°	750lm	600lm	FF3-8302407X-BS											
	40°	750lm	600lm	FF3-8304007X-BS											
4000K	24°	800lm	650lm	FF3-8402407X-BS											
	40°	800lm	650lm	FF3-8404007X-BS											

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Project: Hovenloen Restaurant, Norway



NEKO / FUSION / FF5
Fixed LED Downlight



11W | CRI90 | 2700K | 24° | OSRAM | UGR | IP20 | 5 YEARS GUARANTEE | CB | CE | C-UL US LISTED



Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FF5-8272411X-WB
						40°	1200lm	850lm	FF5-8274011X-WB
					3000K	24°	1300lm	900lm	FF5-8302411X-WB
						40°	1300lm	900lm	FF5-8304011X-WB
					4000K	24°	1400lm	950lm	FF5-8402411X-WB
						40°	1400lm	950lm	FF5-8404011X-WB



Black Reflector

11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FF5-8272411X-BB
						40°	1200lm	850lm	FF5-8274011X-BB
					3000K	24°	1300lm	900lm	FF5-8302411X-BB
						40°	1300lm	900lm	FF5-8304011X-BB
					4000K	24°	1400lm	950lm	FF5-8402411X-BB
						40°	1400lm	950lm	FF5-8404011X-BB



Specular Reflector

11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FF5-8272411X-WS
						40°	1200lm	950lm	FF5-8274011X-WS
					3000K	24°	1300lm	1000lm	FF5-8302411X-WS
						40°	1300lm	1000lm	FF5-8304011X-WS
					4000K	24°	1400lm	1100lm	FF5-8402411X-WS
						40°	1400lm	1100lm	FF5-8404011X-WS



Specular Reflector

11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FF5-8272411X-BS
						40°	1200lm	950lm	FF5-8274011X-BS
					3000K	24°	1300lm	1000lm	FF5-8302411X-BS
						40°	1300lm	1000lm	FF5-8304011X-BS
					4000K	24°	1400lm	1100lm	FF5-8402411X-BS
						40°	1400lm	1100lm	FF5-8404011X-BS

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Project: World Health Organization Building, Philippines





NEKO / FUSION/FF10

Fixed LED Downlight




22W CRI90 2700K 24° 40° OSRAM UGR < 10 IP20 5 YEARS GUARANTEE CB CE cUL US LISTED

282x37 1-25mm Ceiling Thickness




Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FF10-8272422X-WB	
						40°	2400lm	1600lm	FF10-8274022X-WB	
						3000K	24°	2600lm	1800lm	FF10-8302422X-WB
							40°	2600lm	1800lm	FF10-8304022X-WB
						4000K	24°	2800lm	2000lm	FF10-8402422X-WB
							40°	2800lm	2000lm	FF10-8404022X-WB



Black Reflector

22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FF10-8272422X-BB	
						40°	2400lm	1600lm	FF10-8274022X-BB	
						3000K	24°	2600lm	1800lm	FF10-8302422X-BB
							40°	2600lm	1800lm	FF10-8304022X-BB
						4000K	24°	2800lm	2000lm	FF10-8402422X-BB
							40°	2800lm	2000lm	FF10-8404022X-BB



Specular Reflector

22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FF10-8272422X-WS	
						40°	2400lm	2000lm	FF10-8274022X-WS	
						3000K	24°	2600lm	2100lm	FF10-8302422X-WS
							40°	2600lm	2100lm	FF10-8304022X-WS
						4000K	24°	2800lm	2300lm	FF10-8402422X-WS
							40°	2800lm	2300lm	FF10-8404022X-WS



Specular Reflector

22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FF10-8272422X-BS	
						40°	2400lm	2000lm	FF10-8274022X-BS	
						3000K	24°	2600lm	2100lm	FF10-8302422X-BS
							40°	2600lm	2100lm	FF10-8304022X-BS
						4000K	24°	2800lm	2300lm	FF10-8402422X-BS
							40°	2800lm	2300lm	FF10-8404022X-BS

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Project: Bvlgari Hotel, Shanghai, China



NEKO / FUSION / FFT5
Fixed Trimless Downlight



11W CRI90 2700K 24° OSRAM UGR < 10 IP20 5 YEARS GUARANTEE CB CE cUL US LISTED CRI80 3000K 40° 50,000h@L80B10



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FFT5-8272411X-WB	
						40°	1200lm	850lm	FFT5-8274011X-WB	
						3000K	24°	1300lm	900lm	FFT5-8302411X-WB
							40°	1300lm	900lm	FFT5-8304011X-WB
						4000K	24°	1400lm	950lm	FFT5-8402411X-WB
							40°	1400lm	950lm	FFT5-8404011X-WB
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FFT5-8272411X-BB	
						40°	1200lm	850lm	FFT5-8274011X-BB	
						3000K	24°	1300lm	900lm	FFT5-8302411X-BB
							40°	1300lm	900lm	FFT5-8304011X-BB
						4000K	24°	1400lm	950lm	FFT5-8402411X-BB
							40°	1400lm	950lm	FFT5-8404011X-BB
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FFT5-8272411X-WS	
						40°	1200lm	950lm	FFT5-8274011X-WS	
						3000K	24°	1300lm	1000lm	FFT5-8302411X-WS
							40°	1300lm	1000lm	FFT5-8304011X-WS
						4000K	24°	1400lm	1100lm	FFT5-8402411X-WS
							40°	1400lm	1100lm	FFT5-8404011X-WS
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FFT5-8272411X-BS	
						40°	1200lm	950lm	FFT5-8274011X-BS	
						3000K	24°	1300lm	1000lm	FFT5-8302411X-BS
							40°	1300lm	1000lm	FFT5-8304011X-BS
						4000K	24°	1400lm	1100lm	FFT5-8402411X-BS
							40°	1400lm	1100lm	FFT5-8404011X-BS


Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)





NEKO / FUSION / FFT10

Fixed Trimless Downlight



22W | CRI90 / CRI80 | 2700K / 3000K / 4000K | 24° / 40° | **OSRAM** UGR < 10 | 50,000h@L80B10 | IP20 | 5 YEARS GUARANTEED | CB | CE | cUL US LISTED



	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code							
 Black Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FFT10-8272422X-WB							
							40°	2400lm	1600lm	FFT10-8274022X-WB							
							3000K	24°	2600lm	1800lm	FFT10-8302422X-WB						
								40°	2600lm	1800lm	FFT10-8304022X-WB						
							4000K	24°	2800lm	2000lm	FFT10-8402422X-WB						
								40°	2800lm	2000lm	FFT10-8404022X-WB						
							 Black Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FFT10-8272422X-BB
														40°	2400lm	1600lm	FFT10-8274022X-BB
3000K	24°	2600lm	1800lm	FFT10-8302422X-BB													
	40°	2600lm	1800lm	FFT10-8304022X-BB													
4000K	24°	2800lm	2000lm	FFT10-8402422X-BB													
	40°	2800lm	2000lm	FFT10-8404022X-BB													
 Specular Reflector	22 W	24 W	30 V	700 mA	80	2700K								24°	2400lm	2000lm	FFT10-8272422X-WS
														40°	2400lm	2000lm	FFT10-8274022X-WS
							3000K	24°	2600lm	2100lm	FFT10-8302422X-WS						
								40°	2600lm	2100lm	FFT10-8304022X-WS						
							4000K	24°	2800lm	2300lm	FFT10-8402422X-WS						
								40°	2800lm	2300lm	FFT10-8404022X-WS						
							 Specular Reflector	22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FFT10-8272422X-BS
														40°	2400lm	2000lm	FFT10-8274022X-BS
3000K	24°	2600lm	2100lm	FFT10-8302422X-BS													
	40°	2600lm	2100lm	FFT10-8304022X-BS													
4000K	24°	2800lm	2300lm	FFT10-8402422X-BS													
	40°	2800lm	2300lm	FFT10-8404022X-BS													


Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

NEKO / FUSION / FA5

Adjustable LED Downlight



11W CRI90 CRI80 2700K 3000K 4000K 24° 40° OSRAM 50,000h@L80B10 UGR < 10 IP20 5 YEARS GUARANTEE CB CE cUL US LISTED





LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FA5-8272411X-WB						
						40°	1200lm	850lm	FA5-8274011X-WB						
						3000K	24°	1300lm	900lm	FA5-8302411X-WB					
							40°	1300lm	900lm	FA5-8304011X-WB					
						4000K	24°	1400lm	950lm	FA5-8402411X-WB					
							40°	1400lm	950lm	FA5-8404011X-WB					

						11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	850lm	FA5-8272411X-BB
40°	1200lm	850lm	FA5-8274011X-BB												
3000K	24°	1300lm	900lm	FA5-8302411X-BB											
	40°	1300lm	900lm	FA5-8304011X-BB											
4000K	24°	1400lm	950lm	FA5-8402411X-BB											
	40°	1400lm	950lm	FA5-8404011X-BB											

11 W	13 W	15 V	700 mA	80	2700K							24°	1200lm	950lm	FA5-8272411X-WS
						40°	1200lm	950lm	FA5-8274011X-WS						
						3000K	24°	1300lm	1000lm	FA5-8302411X-WS					
							40°	1300lm	1000lm	FA5-8304011X-WS					
						4000K	24°	1400lm	1100lm	FA5-8402411X-WS					
							40°	1400lm	1100lm	FA5-8404011X-WS					

						11 W	13 W	15 V	700 mA	80	2700K	24°	1200lm	950lm	FA5-8272411X-BS
40°	1200lm	950lm	FA5-8274011X-BS												
3000K	24°	1300lm	1000lm	FA5-8302411X-BS											
	40°	1300lm	1000lm	FA5-8304011X-BS											
4000K	24°	1400lm	1100lm	FA5-8402411X-BS											
	40°	1400lm	1100lm	FA5-8404011X-BS											



Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

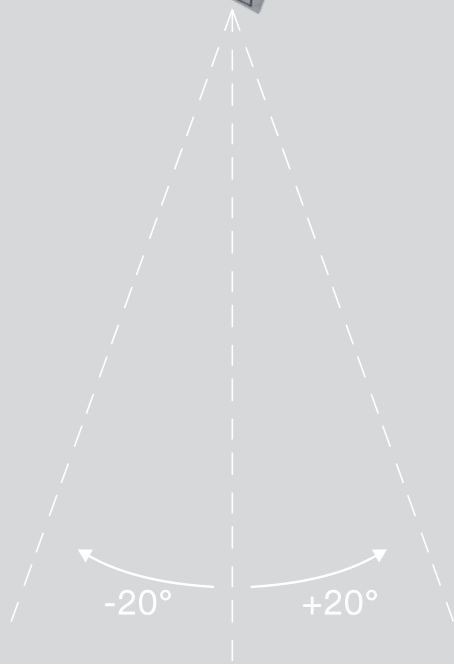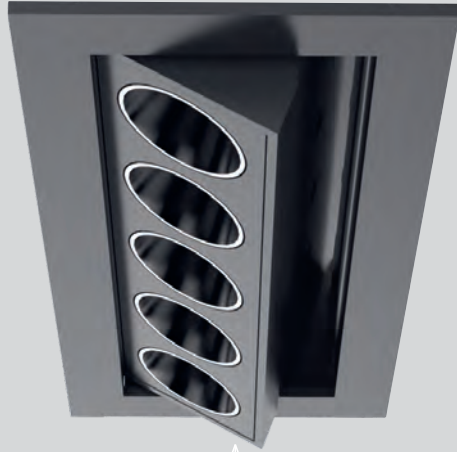

NEKO / FUSION / FA10
Adjustable LED Downlight




22W | CRI90 | 2700K | 24° | OSRAM | UGR < 10 | IP20 | 5 YEARS GUARANTEE | CB | CE | cUL US LISTED




Black Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FA10-8272422X-WB	
						40°	2400lm	1600lm	FA10-8274022X-WB	
						3000K	24°	2600lm	1800lm	FA10-8302422X-WB
							40°	2600lm	1800lm	FA10-8304022X-WB
						4000K	24°	2800lm	2000lm	FA10-8402422X-WB
							40°	2800lm	2000lm	FA10-8404022X-WB




Black Reflector

22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	1600lm	FA10-8272422X-BB	
						40°	2400lm	1600lm	FA10-8274022X-BB	
						3000K	24°	2600lm	1800lm	FA10-8302422X-BB
							40°	2600lm	1800lm	FA10-8304022X-BB
						4000K	24°	2800lm	2000lm	FA10-8402422X-BB
							40°	2800lm	2000lm	FA10-8404022X-BB



Specular Reflector

22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FA10-8272422X-WS	
						40°	2400lm	2000lm	FA10-8274022X-WS	
						3000K	24°	2600lm	2100lm	FA10-8302422X-WS
							40°	2600lm	2100lm	FA10-8304022X-WS
						4000K	24°	2800lm	2300lm	FA10-8402422X-WS
							40°	2800lm	2300lm	FA10-8404022X-WS



Specular Reflector

22 W	24 W	30 V	700 mA	80	2700K	24°	2400lm	2000lm	FA10-8272422X-BS	
						40°	2400lm	2000lm	FA10-8274022X-BS	
						3000K	24°	2600lm	2100lm	FA10-8302422X-BS
							40°	2600lm	2100lm	FA10-8304022X-BS
						4000K	24°	2800lm	2300lm	FA10-8402422X-BS
							40°	2800lm	2300lm	FA10-8404022X-BS

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)


Project: Bvlgari Hotel, Shanghai, China



NEKO / FUSION / FW5
Wall Washer LED Downlight




11W CRI90 2700K CRI80 3000K 4000K OSRAM 50,000h@L80B10 IP20 5 YEARS GUARANTEE CB CE c UL US LISTED



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	WW	1200lm	550lm	FW5-827WW11X-WM
					3000K	WW	1300lm	600lm	FW5-830WW11X-WM
					4000K	WW	1400lm	650lm	FW5-840WW11X-WM



Matt Reflector


11 W	13 W	15 V	700 mA	80	2700K	WW	1200lm	550lm	FW5-827WW11X-BM
					3000K	WW	1300lm	600lm	FW5-830WW11X-BM
					4000K	WW	1400lm	650lm	FW5-840WW11X-BM

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Trimless available




Trimless code for FW5-830WW11X-WM
FWT5-830WW11X-WM



Project: Private House, China



NEKO / FUSION / FW10
Wall Washer LED Downlight

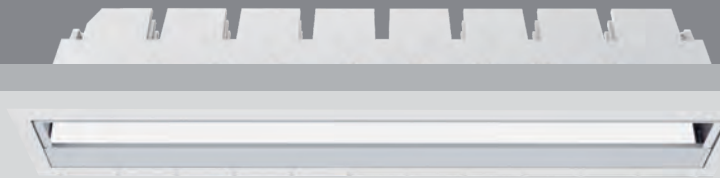

22W CRI90 2700K
CRI80 3000K
4000K




OSRAM
50,000h@L80B10

IP20


5 YEAR
GUARANTEE

CB CE

UL LISTED



Matt Reflector



Matt Reflector

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	WW	2400lm	1100lm	FW10-827WW22X-WM
					3000K	WW	2600lm	1200lm	FW10-830WW22X-WM
					4000K	WW	2800lm	1300lm	FW10-840WW22X-WM


22 W	24 W	30 V	700 mA	80	2700K	WW	2400lm	1100lm	FW10-827WW22X-BM
					3000K	WW	2600lm	1200lm	FW10-830WW22X-BM
					4000K	WW	2800lm	1300lm	FW10-840WW22X-BM



Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Trimless available




Trimless code for FW10-830WW22X-WM
FWT10-830WW22X-WM



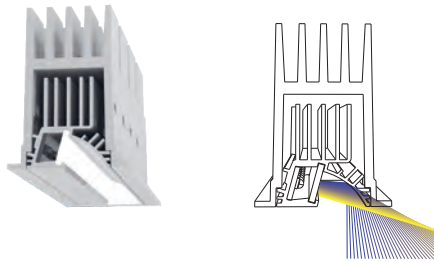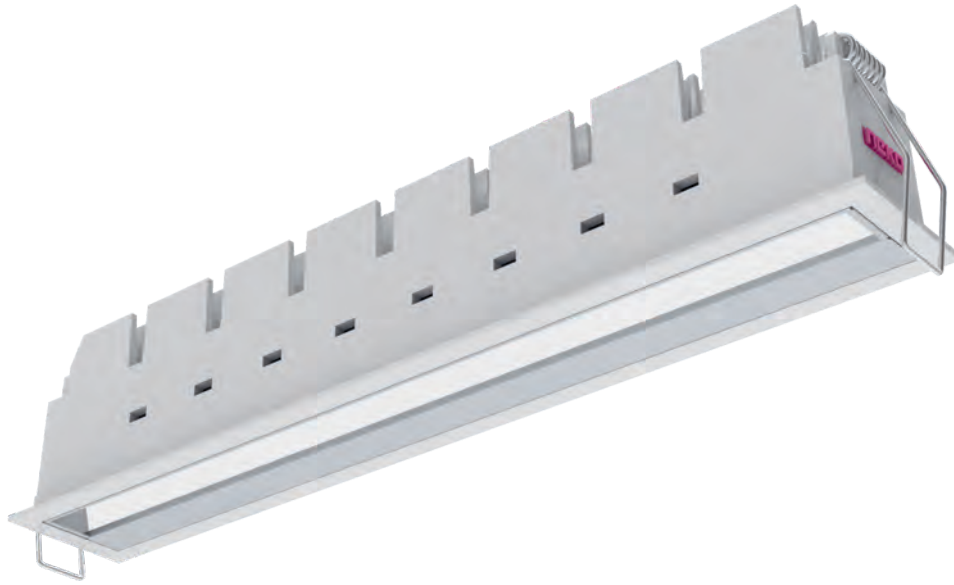


sehr gute Wall Washer Beleuchtungsqualität
High quality wall washer illumination

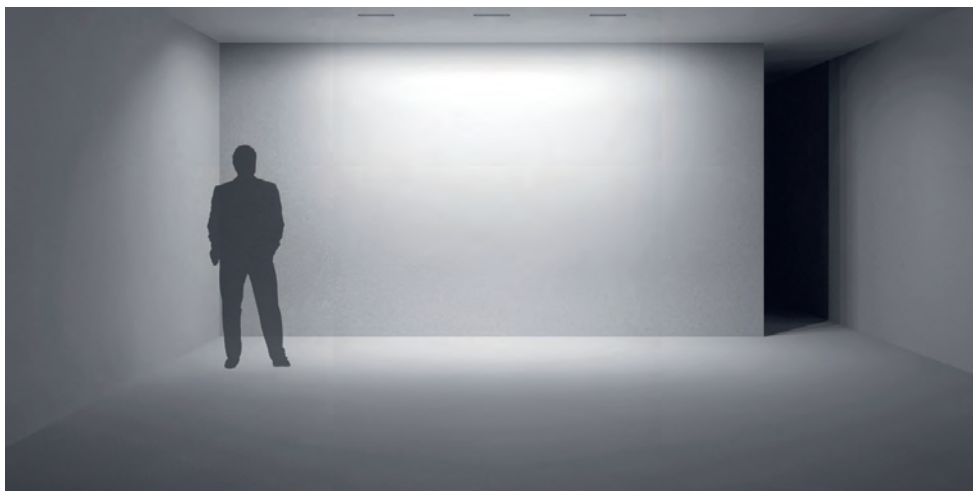


NEKO / FUSION / FG5
General LED Downlight



11W CRI90 2700K CRI80 3000K 4000K OSRAM 50,000h@L80B10 IP20 5 YEARS GUARANTEE CB CE cUL US LISTED



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	15 V	700 mA	80	2700K	75°	1200lm	380lm	FG5-8277511X-WB
					3000K	75°	1300lm	400lm	FG5-8307511X-WB
					4000K	75°	1400lm	450lm	FG5-8407511X-WB




11 W	13 W	15 V	700 mA	80	2700K	75°	1200lm	350lm	FG5-8277511X-BB
					3000K	75°	1300lm	400lm	FG5-8307511X-BB
					4000K	75°	1400lm	450lm	FG5-8407511X-BB

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Trimless available




Trimless code for FG5-8307511X-WB
FGT5-8307511X-WB




NEKO / FUSION / **FG10**
General LED Downlight



22W CRI90 CRI80 2700K 3000K 4000K OSRAM 50,000h@L80B10 IP20 5 YEAR GUARANTEE CB CE UL LISTED



LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
22 W	24 W	30 V	700 mA	80	2700K	75°	2400lm	850lm	FG10-8277522X-WB
						3000K 75°	2600lm	900lm	FG10-8307522X-WB
						4000K 75°	2800lm	950lm	FG10-8407522X-WB



22 W	24 W	30 V	700 mA	80	2700K	75°	2400lm	850lm	FG10-8277522X-BB
						3000K 75°	2600lm	900lm	FG10-8307522X-BB
						4000K 75°	2800lm	950lm	FG10-8407522X-BB

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Trimless available



Trimless code for FG10-8307522X-WB
FGT10-8307522X-WB





Project: Medical Office Celle Germany, Germany




NEKO / FUSION
Adjustable Spotlight

Diversity Design with Adjustable Spot Light







NEKO / FUSION / FS1
Adjustable Spotlight




2W CRI80 CRI90 2700K 3000K 4000K 15° 30° OSRAM UGR < 19 IP 20 5 YEAR GUARANTEE CB CE C UL US LISTED

62x37 1-25mm Ceiling Thickness 60 70x45

	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
 <p>White</p>	2 W	3 W	3 V	700 mA	80	2700K	15	220lm	160lm	FS1-8271502X-WN	
							30	220lm	160lm	FS1-8273002X-WN	
							3000K	15	250lm	170lm	FS1-8301502X-WN
								30	250lm	170lm	FS1-8303002X-WN
							4000K	15	280lm	180lm	FS1-8401502X-WN
								30	280lm	180lm	FS1-8403002X-WN
 <p>Black</p>	2 W	3 W	3 V	700 mA	80	2700K	15	220lm	160lm	FS1-8271502X-BN	
							30	220lm	160lm	FS1-8273002X-BN	
							3000K	15	250lm	170lm	FS1-8301502X-BN
								30	250lm	170lm	FS1-8303002X-BN
							4000K	15	280lm	180lm	FS1-8401502X-BN
								30	280lm	180lm	FS1-8403002X-BN



Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

NEKO / FUSION / FS2
Adjustable Spotlight



4W | CRI80 / CRI90 | 2700K / 3000K / 4000K | 15° / 30° | **OSRAM** | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | CUL US LISTED

90x37 | 1-25mm Ceiling Thickness | 60 | 98x45

	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
 White	4 W	6 W	6 V	700 mA	80	2700K	15	450lm	330lm	FS2-8271504X-WN	
							30	450lm	330lm	FS2-8273004X-WN	
							3000K	15	500lm	350lm	FS2-8301504X-WN
								30	500lm	350lm	FS2-8303004X-WN
							4000K	15	550lm	400lm	FS2-8401504X-WN
								30	550lm	400lm	FS2-8403004X-WN
 Black	4 W	6 W	6 V	700 mA	80	2700K	15	450lm	330lm	FS2-8271504X-BN	
							30	450lm	330lm	FS2-8273004X-BN	
							3000K	15	500lm	350lm	FS2-8301504X-BN
								30	500lm	350lm	FS2-8303004X-BN
							4000K	15	550lm	400lm	FS2-8401504X-BN
								30	550lm	400lm	FS2-8403004X-BN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

NEKO / FUSION / FS3
Adjustable Spotlight



7W CRI80 CRI90 2700K 3000K 4000K 15° 30° OSRAM UGR < 19 IP 20 5 YEARS GUARANTEE CB CE C UL US LISTED

144x37 1-25mm Ceiling Thickness 60 152.5x45



White



Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code						
7 W	9 W	9 V	700 mA	80	2700K	15	700lm	500lm	FS3-8271507X-WN						
						30	700lm	500lm	FS3-8273007X-WN						
						3000K	15	750lm	550lm	FS3-8301507X-WN					
							30	750lm	550lm	FS3-8303007X-WN					
						4000K	15	800lm	600lm	FS3-8401507X-WN					
							30	800lm	600lm	FS3-8403007X-WN					
						7 W	9 W	9 V	700 mA	80	2700K	15	700lm	500lm	FS3-8271507X-BN
												30	700lm	500lm	FS3-8273007X-BN
3000K	15	750lm	550lm	FS3-8301507X-BN											
	30	750lm	550lm	FS3-8303007X-BN											
4000K	15	800lm	600lm	FS3-8401507X-BN											
	30	800lm	600lm	FS3-8402507X-BN											

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Trimless available




Trimless code for FS3-8301507X-WN
FST3-8301507X-WN

144x37



60 36 144x37

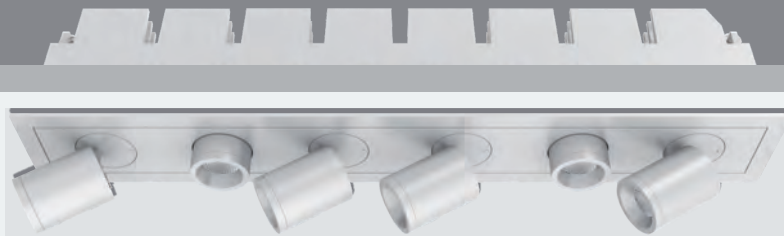NEKO / FUSION / FS6
Adjustable Spotlight



14W | CRI80 / CRI90 | 2700K / 3000K / 4000K | 15° / 30° | OSRAM | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | CUL US LISTED

282x37 | 1-25mm Ceiling Thickness | 60 | 290x45

	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
 White	14 W	16 W	18 V	700 mA	80	2700K	15	1400lm	1000lm	FS6-8271514X-WN	
							30	1400lm	1000lm	FS6-8273014X-WN	
							3000K	15	1500lm	1050lm	FS6-8301514X-WN
								30	1500lm	1050lm	FS6-8303014X-WN
							4000K	15	1600lm	1100lm	FS6-8401514X-WN
								30	1600lm	1100lm	FS6-8403014X-WN
 Black	14 W	16 W	18 V	700 mA	80	2700K	15	1400lm	1000lm	FS6-8271514X-BN	
							30	1400lm	1000lm	FS6-8273014X-BN	
							3000K	15	1500lm	1050lm	FS6-8301514X-BN
								30	1500lm	1050lm	FS6-8303014X-BN
							4000K	15	1600lm	1100lm	FS6-8401514X-BN
								30	1600lm	1100lm	FS6-8403014X-BN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Trimless available



Trimless code for FS6-8301514X-WN
FST6-8301514X-WN

282x37

60 | 37 | 282x37



NEKO / FUSION / FF3-FS1

Adjustable Spotlight



9W | CRI80 / CRI90 | 2700K / 3000K / 4000K | 24° / 40° | **OSRAM** | UGR < 19 | IP 20 | 5 YEARS GUARANTEE | CB | CE | C-UL US LISTED

144x37 | 1-25mm Ceiling Thickness | 60 | 152.5x45


	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
 White	9 W	11 W	12 V	700 mA	80	2700K	24	900lm	650lm	FFS1-8272409X-WB	
							40	900lm	650lm	FFS1-8274009X-WB	
								24	1000lm	700lm	FFS1-8302409X-WB
								40	1000lm	700lm	FFS1-8304009X-WB
								24	1100lm	800lm	FFS1-8402409X-WB
								40	1100lm	800lm	FFS1-8404009X-WB
 Black	9 W	11 W	12 V	700 mA	80	2700K	24	900lm	650lm	FFS1-8272409X-BB	
							40	900lm	650lm	FFS1-8274009X-BB	
								24	1000lm	700lm	FFS1-8302409X-BB
								40	1000lm	700lm	FFS1-8304009X-BB
								24	1100lm	800lm	FFS1-8402409X-BB
								40	1100lm	800lm	FFS1-8404009X-BB

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Trimless available



Trimless code for FFS1-8304009X-WN
FSS3-8304009X-WN





NEKO / FUSION / FF6-FS2
Adjustable Spotlight



17W | CRI80 / CRI90 | 2700K / 3000K / 4000K | 24° / 40° | OSRAM | UGR < 19 | IP20 | 5 YEARS GUARANTEE | CB | CE | CUL US LISTED

282x37 | 1-25mm Ceiling Thickness | 60 | 290x45

	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
 White	17 W	19 W	24 V	700 mA	80	2700K	24	1900lm	1300lm	FFS2-8272417X-WB	
							40	1900lm	1300lm	FFS2-8274017X-WB	
							3000K	24	2000lm	1400lm	FFS2-8302417X-WB
								40	2000lm	1400lm	FFS2-8304017X-WB
							4000K	24	2200lm	1500lm	FFS2-8402417X-WB
40	2200lm	1500lm	FFS2-8404017X-WB								
 Black	17 W	19 W	24 V	700 mA	80	2700K	24	1900lm	1300lm	FFS2-8272417X-BB	
							40	1900lm	1300lm	FFS2-8274017X-BB	
							3000K	24	2000lm	1400lm	FFS2-8302417X-BB
								40	2000lm	1400lm	FFS2-8304017X-BB
							4000K	24	2200lm	1500lm	FFS2-8402417X-BB
40	2200lm	1500lm	FFS2-8404017X-BB								

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Trimless available



Trimless code for FFS2-8304017X-WN
FSS4-8304017X-WN

282x37

60 | 37 | 282x37