




NEKO / SUGAR350

Ceiling Light System

12W CRI80 2700K Tunable White Available
 18W CRI90 3000K 4000K
 **OSRAM** 50,000h@L80B10 **UGR < 19** **IP 40**  **CB** **CE**



	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
 Black	12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012X-BB
						3000K	90°	1900lm	1400lm	SASM-8309012X-BB
						4000K	90°	2000lm	1500lm	SASM-8409012X-BB
	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279018X-BB
						3000K	90°	2600lm	2000lm	SASM-8309018X-BB
						4000K	90°	2800lm	2200lm	SASM-8409018X-BB
 Black-Gold	12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012X-BG
						3000K	90°	1900lm	1400lm	SASM-8309012X-BG
						4000K	90°	2000lm	1500lm	SASM-8409012X-BG
	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279018X-BG
						3000K	90°	2600lm	2000lm	SASM-8309018X-BG
						4000K	90°	2800lm	2200lm	SASM-8409018X-BG
 White	12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012X-WW
						3000K	90°	1900lm	1400lm	SASM-8309012X-WW
						4000K	90°	2000lm	1500lm	SASM-8409012X-WW
	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279018X-WW
						3000K	90°	2600lm	2000lm	SASM-8309018X-WW
						4000K	90°	2800lm	2200lm	SASM-8409018X-WW

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Optional accessory



Magnetic Uplight Module 350

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	33 V	250 mA	80	2700K	110	900lm	800lm	UM35-827A108X-NN
					3000K	110	950lm	850lm	UM35-830A108X-NN
					4000K	110	1050lm	950lm	UM35-840A108X-NN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Code for GAPR-8309012X-WN with Uplight Module
 GAPR-8309012X-WN-U



Standard pendant length: 1200mm Black-Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012X-BB
					3000K	90°	1900lm	1400lm	SAPW-8309012X-BB
					4000K	90°	2000lm	1500lm	SAPW-8409012X-BB
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279018X-BB
					3000K	90°	2600lm	2000lm	SAPW-8309018X-BB
					4000K	90°	2800lm	2200lm	SAPW-8409018X-BB



Standard pendant length: 1200mm Black-Gold

12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012X-BG
					3000K	90°	1900lm	1400lm	SAPW-8309012X-BG
					4000K	90°	2000lm	1500lm	SAPW-8409012X-BG
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279018X-BG
					3000K	90°	2600lm	2000lm	SAPW-8309018X-BG
					4000K	90°	2800lm	2200lm	SAPW-8409018X-BG



Standard pendant length: 1200mm White-White

12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPW-8279012X-WW
					3000K	90°	1900lm	1400lm	SAPW-8309012X-WW
					4000K	90°	2000lm	1500lm	SAPW-8409012X-WW
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPW-8279018X-WW
					3000K	90°	2600lm	2000lm	SAPW-8309018X-WW
					4000K	90°	2800lm	2200lm	SAPW-8409018X-WW

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Standard pendant length: 1000mm Black-Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPR-8279012X-BB
					3000K	90°	1900lm	1400lm	SAPR-8309012X-BB
					4000K	90°	2000lm	1500lm	SAPR-8409012X-BB
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPR-8279018X-BB
					3000K	90°	2600lm	2000lm	SAPR-8309018X-BB
					4000K	90°	2800lm	2200lm	SAPR-8409018X-BB

Remark: Pendant Rod Cuttable



Standard pendant length: 1000mm Black-Gold

12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPR-8279012X-BG
					3000K	90°	1900lm	1400lm	SAPR-8309012X-BG
					4000K	90°	2000lm	1500lm	SAPR-8409012X-BG
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPR-8279018X-BG
					3000K	90°	2600lm	2000lm	SAPR-8309018X-BG
					4000K	90°	2800lm	2200lm	SAPR-8409018X-BG

Remark: Pendant Rod Cuttable



Standard pendant length: 1000mm White-White

12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SAPR-8279012X-WW
					3000K	90°	1900lm	1400lm	SAPR-8309012X-WW
					4000K	90°	2000lm	1500lm	SAPR-8409012X-WW
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SAPR-8279018X-WW
					3000K	90°	2600lm	2000lm	SAPR-8309018X-WW
					4000K	90°	2800lm	2200lm	SAPR-8409018X-WW


Remark: Pendant Rod Cuttable

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Code for SAPW-8309012X-WW with Uplight Module


SAPW-8309012X-WW-U

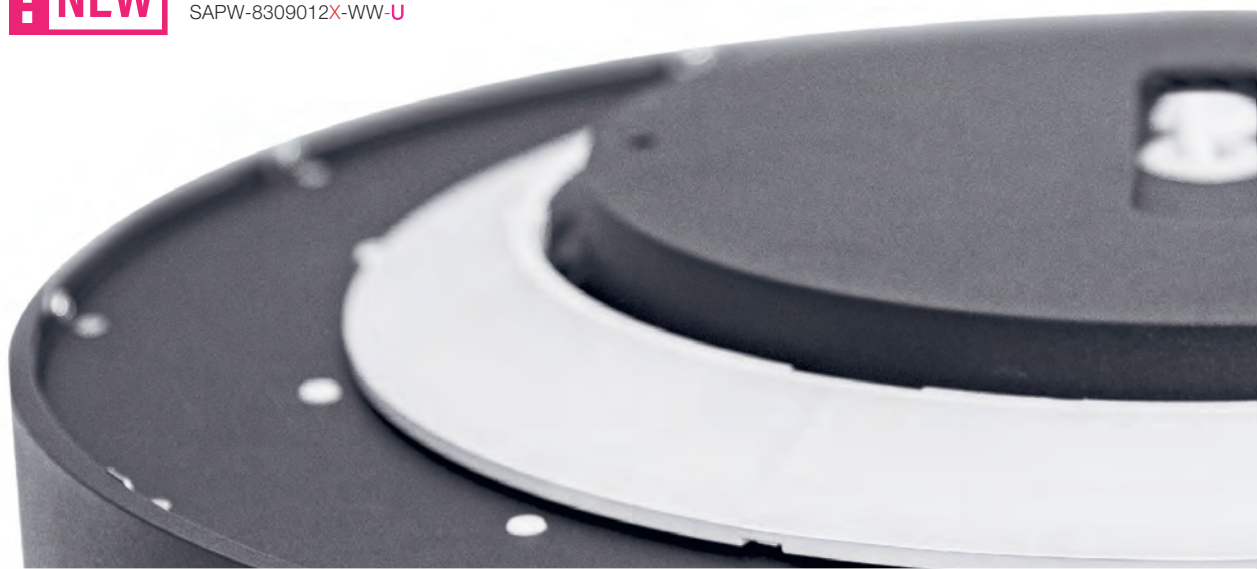



SUGAR now with
UPLIGHT

Code for SAPW-8309012X-WW with Uplight Module

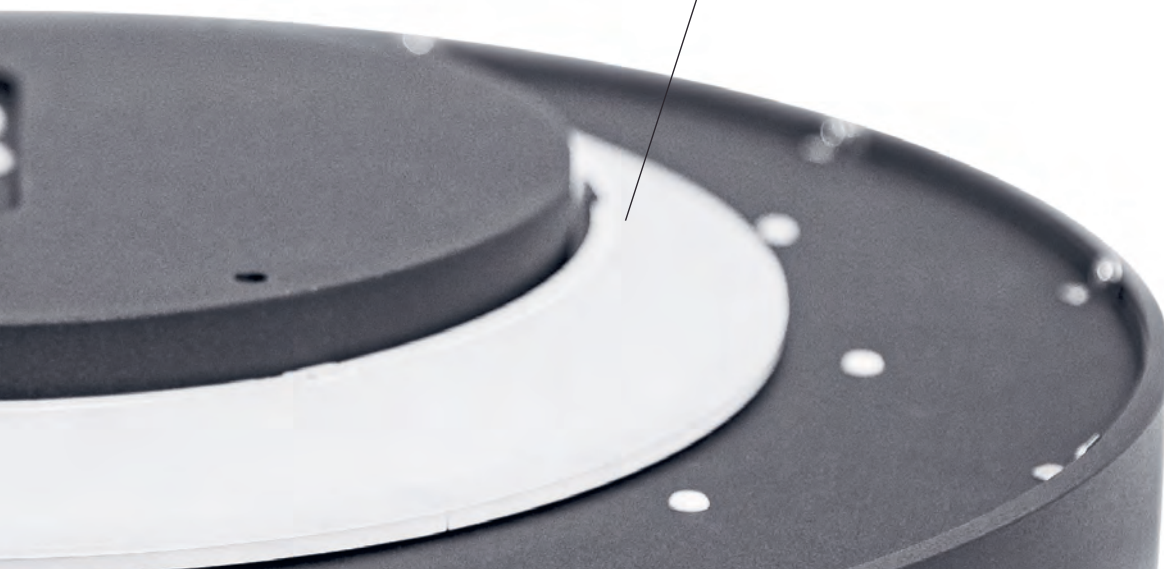

NEKO / SUGAR450

Ceiling Light System

18W
25W

CRI80
CRI90

2700K
3000K
4000K

Tunable White Available

90°

OSRAM


50,000h@L80B10

UGR < 19

IP 40

5 YEARS GUARANTEE

CB CE



Black



Black-Gold



White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279018X-BB
					3000K	90°	2600lm	2000lm	SBSM-8309018X-BB
					4000K	90°	2800lm	2200lm	SBSM-8409018X-BB
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279025X-BB
					3000K	90°	3700lm	2800lm	SBSM-8309025X-BB
					4000K	90°	4000lm	3000lm	SBSM-8409025X-BB
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279018X-BG
					3000K	90°	2600lm	2000lm	SBSM-8309018X-BG
					4000K	90°	2800lm	2200lm	SBSM-8409018X-BG
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279025X-BG
					3000K	90°	3700lm	2800lm	SBSM-8309025X-BG
					4000K	90°	4000lm	3000lm	SBSM-8409025X-BG
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBSM-8279018X-WW
					3000K	90°	2600lm	2000lm	SBSM-8309018X-WW
					4000K	90°	2800lm	2200lm	SBSM-8409018X-WW
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBSM-8279025X-WW
					3000K	90°	3700lm	2800lm	SBSM-8309025X-WW
					4000K	90°	4000lm	3000lm	SBSM-8409025X-WW

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Optional accessory



Magnetic Uplight Module 450

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110	1100lm	1000lm	UM45-827A111X-NN
					3000K	110	1200lm	1100lm	UM45-830A111X-NN
					4000K	110	1300lm	1200lm	UM45-840A111X-NN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Code for GAPR-8309012X-WN with Uplight Module

GAPR-8309012X-WN-U





Standard pendant length: 1200mm Black-Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279018X-BB
					3000K	90°	2600lm	2000lm	SBPW-8309018X-BB
					4000K	90°	2800lm	2200lm	SBPW-8409018X-BB
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279025X-BB
					3000K	90°	3700lm	2800lm	SBPW-8309025X-BB
					4000K	90°	4000lm	3000lm	SBPW-8409025X-BB



Standard pendant length: 1200mm Black-Gold

18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279018X-BG
					3000K	90°	2600lm	2000lm	SBPW-8309018X-BG
					4000K	90°	2800lm	2200lm	SBPW-8409018X-BG
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279025X-BG
					3000K	90°	3700lm	2800lm	SBPW-8309025X-BG
					4000K	90°	4000lm	3000lm	SBPW-8409025X-BG



Standard pendant length: 1200mm White-White

18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPW-8279018X-WW
					3000K	90°	2600lm	2000lm	SBPW-8309018X-WW
					4000K	90°	2800lm	2200lm	SBPW-8409018X-WW
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPW-8279025X-WW
					3000K	90°	3700lm	2800lm	SBPW-8309025X-WW
					4000K	90°	4000lm	3000lm	SBPW-8409025X-WW

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Standard pendant length: 1000mm Black-Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279018X-BB
					3000K	90°	2600lm	2000lm	SBPR-8309018X-BB
					4000K	90°	2800lm	2200lm	SBPR-8409018X-BB
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279025X-BB
					3000K	90°	3700lm	2800lm	SBPR-8309025X-BB
					4000K	90°	4000lm	3000lm	SBPR-8409025X-BB

Remark: Pendant Rod Cuttable



Standard pendant length: 1000mm Black-Gold

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279018X-BG
					3000K	90°	2600lm	2000lm	SBPR-8309018X-BG
					4000K	90°	2800lm	2200lm	SBPR-8409018X-BG
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279025X-BG
					3000K	90°	3700lm	2800lm	SBPR-8309025X-BG
					4000K	90°	4000lm	3000lm	SBPR-8409025X-BG

Remark: Pendant Rod Cuttable



Standard pendant length: 1000mm White-White

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SBPR-8279018X-WW
					3000K	90°	2600lm	2000lm	SBPR-8309018X-WW
					4000K	90°	2800lm	2200lm	SBPR-8409018X-WW
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SBPR-8279025X-WW
					3000K	90°	3700lm	2800lm	SBPR-8309025X-WW
					4000K	90°	4000lm	3000lm	SBPR-8409025X-WW

Remark: Pendant Rod Cuttable

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Optional accessory



Magnetic Uplight Module 450

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
11 W	13 W	33 V	350 mA	80	2700K	110	1100lm	1000lm	UM45-827A111X-NN
					3000K	110	1200lm	1100lm	UM45-830A111X-NN
					4000K	110	1300lm	1200lm	UM45-840A111X-NN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Code for SBPR-8309018X-WW with Uplight Module
SBPR-8309018X-WW-U



NEKO / SUGAR600

Ceiling Light System

25W
38W
50W

CRI80
CRI90

2700K
3000K
4000K

Tunable White Available



OSRAM
50,000h@L80B10


UGR < 19

IP40



CB

CE



Black-Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279025X-BB
					3000K	90°	3700lm	2800lm	SCSM-8309025X-BB
					4000K	90°	4000lm	3000lm	SCSM-8409025X-BB
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279038X-BB
					3000K	90°	6200lm	4700lm	SCSM-8309038X-BB
					4000K	90°	6600lm	4900lm	SCSM-8409038X-BB
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279050X-BB
					3000K	90°	8100lm	6100lm	SCSM-8309050X-BB
					4000K	90°	8600lm	6400lm	SCSM-8409050X-BB



Black-Gold

25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279025X-BG
					3000K	90°	3700lm	2800lm	SCSM-8309025X-BG
					4000K	90°	4000lm	3000lm	SCSM-8409025X-BG
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279038X-BG
					3000K	90°	6200lm	4700lm	SCSM-8309038X-BG
					4000K	90°	6600lm	4900lm	SCSM-8409038X-BG
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279050X-BG
					3000K	90°	8100lm	6100lm	SCSM-8309050X-BG
					4000K	90°	8600lm	6400lm	SCSM-8409050X-BG



White-White

25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCSM-8279025X-WW
					3000K	90°	3700lm	2800lm	SCSM-8309025X-WW
					4000K	90°	4000lm	3000lm	SCSM-8409025X-WW
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCSM-8279038X-WW
					3000K	90°	6200lm	4700lm	SCSM-8309038X-WW
					4000K	90°	6600lm	4900lm	SCSM-8409038X-WW
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCSM-8279050X-WW
					3000K	90°	8100lm	6100lm	SCSM-8309050X-WW
					4000K	90°	8600lm	6400lm	SCSM-8409050X-WW




Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

NEKO / SUGAR350

Ceiling Light System

12W CRI80 2700K Tunable White Available
 18W CRI90 3000K 4000K
 **OSRAM** 50,000h@L80B10 **UGR < 19** **IP 40**  **CB CE**



	LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code	
 Black	12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012X-BB	
						3000K	90°	1900lm	1400lm	SASM-8309012X-BB	
						4000K	90°	2000lm	1500lm	SASM-8409012X-BB	
	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279018X-BB	
						3000K	90°	2600lm	2000lm	SASM-8309018X-BB	
						4000K	90°	2800lm	2200lm	SASM-8409018X-BB	
	 Black-Gold	12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012X-BG
							3000K	90°	1900lm	1400lm	SASM-8309012X-BG
							4000K	90°	2000lm	1500lm	SASM-8409012X-BG
18 W		20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279018X-BG	
						3000K	90°	2600lm	2000lm	SASM-8309018X-BG	
						4000K	90°	2800lm	2200lm	SASM-8409018X-BG	
 White		12 W	14 W	36 V	350 mA	80	2700K	90°	1800lm	1300lm	SASM-8279012X-WW
							3000K	90°	1900lm	1400lm	SASM-8309012X-WW
							4000K	90°	2000lm	1500lm	SASM-8409012X-WW
	18 W	20 W	36 V	500 mA	80	2700K	90°	2400lm	1900lm	SASM-8279018X-WW	
						3000K	90°	2600lm	2000lm	SASM-8309018X-WW	
						4000K	90°	2800lm	2200lm	SASM-8409018X-WW	

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Optional accessory



Magnetic Uplight Module 350

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
8 W	10 W	33 V	250 mA	80	2700K	110	900lm	800lm	UM35-827A108X-NN
					3000K	110	950lm	850lm	UM35-830A108X-NN
					4000K	110	1050lm	950lm	UM35-840A108X-NN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Code for GAPR-8309012X-WN with Uplight Module
 GAPR-8309012X-WN-U



Standard pendant length: 1200mm Black-Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279025X-BB
					3000K	90°	3700lm	2800lm	SCPW-8309025X-BB
					4000K	90°	4000lm	3000lm	SCPW-8409025X-BB
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279038X-BB
					3000K	90°	6200lm	4700lm	SCPW-8309038X-BB
					4000K	90°	6600lm	4900lm	SCPW-8409038X-BB
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279050X-BB
					3000K	90°	8100lm	6100lm	SCPW-8309050X-BB
					4000K	90°	8600lm	6400lm	SCPW-8409050X-BB



Standard pendant length: 1200mm Black-Gold

25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279025X-BG
					3000K	90°	3700lm	2800lm	SCPW-8309025X-BG
					4000K	90°	4000lm	3000lm	SCPW-8409025X-BG
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279038X-BG
					3000K	90°	6200lm	4700lm	SCPW-8309038X-BG
					4000K	90°	6600lm	4900lm	SCPW-8409038X-BG
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279050X-BG
					3000K	90°	8100lm	6100lm	SCPW-8309050X-BG
					4000K	90°	8600lm	6400lm	SCPW-8409050X-BG



Standard pendant length: 1200mm White-White

25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPW-8279025X-WW
					3000K	90°	3700lm	2800lm	SCPW-8309025X-WW
					4000K	90°	4000lm	3000lm	SCPW-8409025X-WW
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPW-8279038X-WW
					3000K	90°	6200lm	4700lm	SCPW-8309038X-WW
					4000K	90°	6600lm	4900lm	SCPW-8409038X-WW
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPW-8279050X-WW
					3000K	90°	8100lm	6100lm	SCPW-8309050X-WW
					4000K	90°	8600lm	6400lm	SCPW-8409050X-WW

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Optional accessory



Magnetic Uplight Module 600

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	110	1800lm	1600lm	UM60-827A118X-NN
					3000K	110	1900lm	1700lm	UM60-830A118X-NN
					4000K	110	2000lm	1800lm	UM60-840A118X-NN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Code for SCPW-8279038X-WW with Uplight Module
SCPW-8279038X-WW-U



Standard pendant length: 1000mm Black-Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPR-8279025X-BB
					3000K	90°	3700lm	2800lm	SCPR-8309025X-BB
					4000K	90°	4000lm	3000lm	SCPR-8409025X-BB
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPR-8279038X-BB
					3000K	90°	6200lm	4700lm	SCPR-8309038X-BB
					4000K	90°	6600lm	4900lm	SCPR-8409038X-BB
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPR-8279050X-BB
					3000K	90°	8100lm	6100lm	SCPR-8309050X-BB
					4000K	90°	8600lm	6400lm	SCPR-8409050X-BB

Remark: Pendant Rod Cuttable



Standard pendant length: 1000mm Black-Gold

25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPR-8279025X-BG
					3000K	90°	3700lm	2800lm	SCPR-8309025X-BG
					4000K	90°	4000lm	3000lm	SCPR-8409025X-BG
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPR-8279038X-BG
					3000K	90°	6200lm	4700lm	SCPR-8309038X-BG
					4000K	90°	6600lm	4900lm	SCPR-8409038X-BG
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPR-8279050X-BG
					3000K	90°	8100lm	6100lm	SCPR-8309050X-BG
					4000K	90°	8600lm	6400lm	SCPR-8409050X-BG

Remark: Pendant Rod Cuttable



Standard pendant length: 1000mm White-White

25 W	28 W	36 V	700 mA	80	2700K	90°	3500lm	2600lm	SCPR-8279025X-WW
					3000K	90°	3700lm	2800lm	SCPR-8309025X-WW
					4000K	90°	4000lm	3000lm	SCPR-8409025X-WW
38 W	42 W	36 V	1050 mA	80	2700K	90°	5800lm	4400lm	SCPR-8279038X-WW
					3000K	90°	6200lm	4700lm	SCPR-8309038X-WW
					4000K	90°	6600lm	4900lm	SCPR-8409038X-WW
50 W	54 W	36 V	1400 mA	80	2700K	90°	7200lm	5800lm	SCPR-8279050X-WW
					3000K	90°	8100lm	6100lm	SCPR-8309050X-WW
					4000K	90°	8600lm	6400lm	SCPR-8409050X-WW

Remark: Pendant Rod Cuttable

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Optional accessory



Magnetic Uplight Module 600

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
18 W	20 W	36 V	500 mA	80	2700K	110	1800lm	1600lm	UM60-827A118X-NN
					3000K	110	1900lm	1700lm	UM60-830A118X-NN
					4000K	110	2000lm	1800lm	UM60-840A118X-NN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)


Code for SCPR-8309038X-WW with Uplight Module
SCPR-8309038X-WW-U



NEKO / SUGAR900

Ceiling Light System

65W | CRI80 | 2700K | 3000K | 4000K | CRI90 | OSRAM | UGR < 19 | IP40 | 50,000h@L80B10 | 5 YEAR GUARANTEE | CB | CE



Black-Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDSM-8279065X-BB
					3000K	90°	10500lm	8000lm	SDSM-8309065X-BB
					4000K	90°	11000lm	8400lm	SDSM-8409065X-BB



Black-Gold

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDSM-8279065X-BG
					3000K	90°	10500lm	8000lm	SDSM-8309065X-BG
					4000K	90°	11000lm	8400lm	SDSM-8409065X-BG



White-White

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDSM-8279065X-WW
					3000K	90°	10500lm	8000lm	SDSM-8309065X-WW
					4000K	90°	11000lm	8400lm	SDSM-8409065X-WW

Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)



Standard pendant length: 1200mm Black-Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPW-8279065X-BB
					3000K	90°	10500lm	8000lm	SDPW-8309065X-BB
					4000K	90°	11000lm	8400lm	SDPW-8409065X-BB



Standard pendant length: 1200mm Black-Gold

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPW-8279065X-BG
					3000K	90°	10500lm	8000lm	SDPW-8309065X-BG
					4000K	90°	11000lm	8400lm	SDPW-8409065X-BG



Standard pendant length: 1200mm White-White

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPW-8279065X-WW
					3000K	90°	10500lm	8000lm	SDPW-8309065X-WW
					4000K	90°	11000lm	8400lm	SDPW-8409065X-WW

Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)



Optional accessory



Magnetic Uplight Module 900

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	110	2500lm	2200lm	UM90-827A125X-NN
					3000K	110	2700lm	2400lm	UM90-830A125X-NN
					4000K	110	2900lm	2600lm	UM90-840A125X-NN

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)

Code for SDPW-8309065X-WW with Uplight Module
SDPW-8309065X-WW-U



Standard pendant length: 1000mm Black-Black

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPR-8279065X-BB
					3000K	90°	10500lm	8000lm	SDPR-8309065X-BB
					4000K	90°	11000lm	8400lm	SDPR-8409065X-BB

Remark: Pendant Rod Cuttable



Standard pendant length: 1000mm Black-Gold

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPR-8279065X-BG
					3000K	90°	10500lm	8000lm	SDPR-8309065X-BG
					4000K	90°	11000lm	8400lm	SDPR-8409065X-BG

Remark: Pendant Rod Cuttable



Standard pendant length: 1000mm White-White

65 W	68 W	46 V	1400 mA	80	2700K	90°	9900lm	7600lm	SDPR-8279065X-WW
					3000K	90°	10500lm	8000lm	SDPR-8309065X-WW
					4000K	90°	11000lm	8400lm	SDPR-8409065X-WW

Remark: Pendant Rod Cuttable

Code Remark: X=F(ON-OFF) X=P(Phase Dim) X=A(1-10V Dim) X=D(DALI Dim)



Optional accessory



Magnetic Uplight Module 900

LED Power	System Power	LED Voltage	LED Current	CRI	CCT	Beam	LED Output	System Output	Code
25 W	28 W	36 V	700 mA	80	2700K	110	2500lm	2200lm	UM90-827A125X-NN
					3000K	110	2700lm	2400lm	UM90-830A125X-NN
					4000K	110	2900lm	2600lm	UM90-840A125X-NN

Code Remark: X=F(ON-OFF) X=A(1-10V Dim) X=D(DALI Dim)

Code for SDPR-8309065X-WW with Uplight Module
SDPR-8309065X-WW-U

