


NEKO / TERARACE Micro
Recessed Ground Light



NEKO / TERARACE Nano
Recessed Ground Light



1.5W | CRI80 | 3000K | 18°
40°
65° | IP68 | IK10 | OSRAM
50,000h@L80B10 | CE | Top Cover: Stainless Steel
Body: Aluminum
Color: Dark-Grey




Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1 W	1.5 W	24 V	80	3000K	18°	100lm	TERARACE Micro-830-18°	TEMI-8301802F-DN
				3000K	40°	100lm	TERARACE Micro-830-40°	TEMI-8304002F-DN
				3000K	65°	100lm	TERARACE Micro-830-65°	TEMI-8306502F-DN



Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Pre-embedded Tube



Light Distribution

3000K

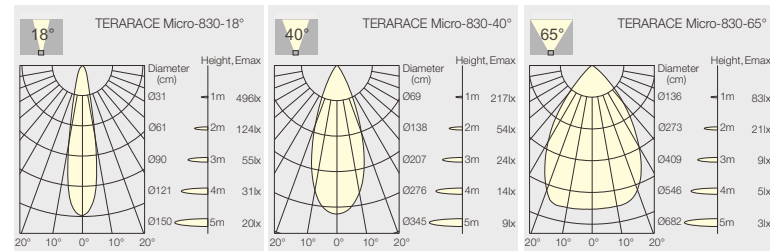

2W | CRI80 | 3000K | 18°
35°
60° | IP68 | IK10 | OSRAM
50,000h@L80B10 | CE | Top Cover: Stainless Steel
Body: Aluminum
Color: Dark-Grey



Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
1.6 W	2 W	24 V	80	3000K	18°	120lm	TERARACE Nano-830-18°	TENA-8301802F-DN
				3000K	35°	120lm	TERARACE Nano-830-35°	TENA-8301802F-DN
				3000K	60°	120lm	TERARACE Nano-830-60°	TENA-8301802F-DN


Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Pre-embedded Tube



Light Distribution



3000K

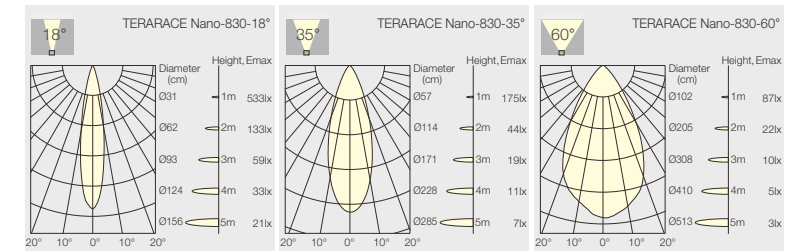


NEKO / TERARACE Mini
Recessed Ground Light



NEKO / TERARACE Maxi
Recessed Ground Light

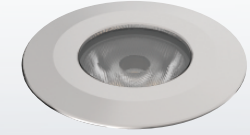

5.5W | CRI80 | 3000K | 30° / 45° | IP68 | IK10 | CITIZEN 50,000h@L80B10 | CE | Top Cover: Stainless Steel | Body: Aluminum | Color: Dark-Grey

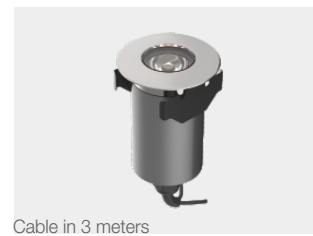


Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
5 W	5.5 W	24 V	80	3000K	30°	500lm	TERARACE Mini-830-30°	TEMI-8303006F-DN
				3000K	45°	500lm	TERARACE Mini-830-45°	TEMI-8304506F-DN



Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Pre-embedded Tube



Light Distribution

3000K

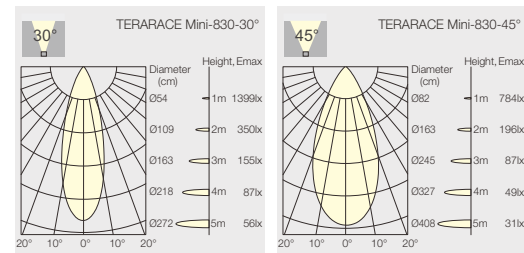

10W | CRI80 | 3000K | 20° / 30° / 50° | IP68 | IK10 | CITIZEN 50,000h@L80B10 | CE | Top Cover: Stainless Steel | Body: Aluminum | Color: Dark-Grey



Cable in 3 meters

LED Power	System Power	LED Voltage	CRI	CCT	Beam	System Output	Model	Code
9 W	10 W	24 V	80	3000K	20°	850lm	TERARACE Maxi-830-20°	TEMA-8302010F-DN
				3000K	30°	850lm	TERARACE Maxi-830-30°	TEMA-8303010F-DN
				3000K	50°	850lm	TERARACE Maxi-830-50°	TEMA-8305010F-DN

Remark: External 24VDC LED driver is required (Non-Dimmable)

Accessory: Pre-embedded Tube



Light Distribution

3000K

