

Scala



Body

Scala is a miniature weatherproof LED notes, made of 316 stainless-steel designed to be installed inside curved surfaces such as handrails and poles or flat in flat architectural surfaces.

Scala offers neat solution for handrail light, easy and fast installation and long lasting.

Mounting Options:
Recessed
For Curved surfaces Min (Ø35mm)

Accessories

IP68 connectors included.
Drill Jig 2F60 to be ordered separately.

Finish

Stainless steel.
Other finish options on request.

LED sources

High Power LED.
CRI: 80 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Wide beam Symmetric.
Wide beam Asymmetric.
Spot Lens - 29° / 33° / 54° / 60°. Elliptical Beam 29° x 44°.

Driver

Remote driver not included.

Applications

Simple compact design makes Scala an ideal solution for today's architectural design; weatherproof design and compact form faction to be integrated in various architectural structure.
Application are: Handrail, walkways, entrances.

Related Products




Scala Symmetric



Scala Symmetrical Curved



Scala Symmetrical Flat

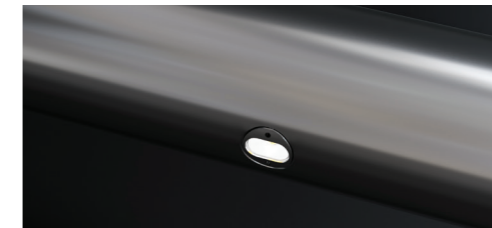

Code ordering example: **3 6 5 8 B R 1 1 - 8 0 3 0 0 0 D 0 8 4**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Scala Symmetrical Curved	3658	BR11 High Power LED	80	30 3000K	1.3W	204 lm	00	D0 No Dim	84 Stainless Steel
Scala Symmetrical Flat	3661		40	4000K		226 lm		DA Dali Dim DP Phase Dim DC CASAMBI D1 0-10V Dim	

Notes:

* For complete code ordering information, please see page 343.
** For other CCT options, please contact us.
For related accessories, please see page 6.
For the most updated product information, please go to our website.





EW = Extra Wide. Ordering code; **00**.

Scala Asymmetric



Scala Asymmetrical Curved

Scala Asymmetrical Flat

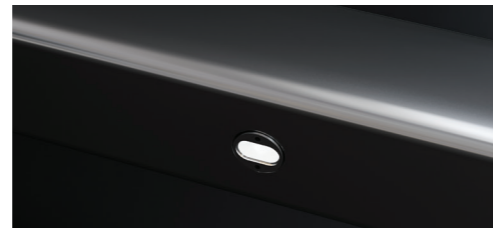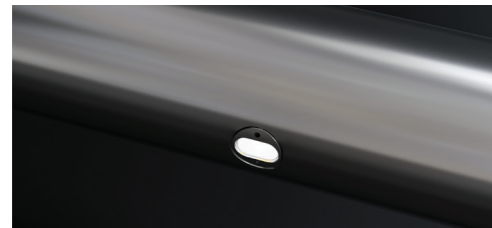

Code ordering example: **3 6 5 7 B R 1 1 - 8 0 3 0 W W D 0 8 4**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Scala Asymmetrical Curved	3657	BR11 High Power LED	80	30 3000K	1.3W	204 lm	WW	D0 No Dim	84 Stainless Steel
				40 4000K		226 lm		DA Dali Dim	
Scala Asymmetrical Flat	3662							DP Phase Dim	
								DC CASAMBI	
								D1 0-10V Dim	

Notes:
 * For complete code ordering information, please see page 343.
 ** For other CCT options, please contact us.
 For related accessories, please see page 6.
 For the most updated product information, please go to our website.





WW = Wallwasher optics. Ordering code; **WW**.

Scala Optica



Scala Optica Curved

Scala Optica Flat

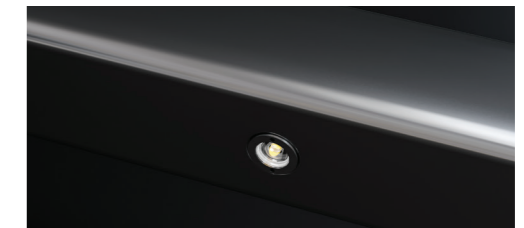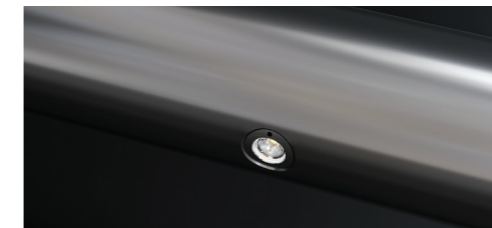








Code ordering example: **3 6 6 0 B R 1 1 - 8 0 3 0 2 9 D 0 8 4**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Scala Optica Curved	3660	BR11 High Power LED	80	30 3000K	1.3W	204 lm	29 / 33 / 54 / 60 / EL	D0 No Dim	84 Stainless Steel
				40 4000K		226 lm		DA Dali Dim	
Scala Optica Flat	3663							DP Phase Dim	
								DC CASAMBI	
								D1 0-10V Dim	

Notes:
 * For complete code ordering information, please see page 343.
 ** For other CCT options, please contact us.
 For related accessories, please see page 6.
 For the most updated product information, please go to our website.

EL = Elliptical Beam (29° x 44°). Ordering code; **EL**.

Driver & Installation Tool

Product / Accessories				
	Drill Jig	Driver	Sharp-nozzle circlip pliers	Round Rasp
		<p>IP66</p> <p>Input: 220-240V 50/60Hz. Output: 2-50Vdc 400mA Max.20W. 1 Driver for Maximum 15 pcs fixtures.</p>		
Scala Symmetrical Scala Asymmetrical Scala Optica	2F60	2F63	2F64	2F65
	15mm Cutter	16mm Cutter		
	 <p>12 Ø 15</p>	 <p>12 Ø 16</p>	 <p>125 500 180 1000 60 231.5</p>	