

ULTRACRI

High performance ledstrip CRI between 97 and 98
 Ruban led haute performance IRC compris entre 97 et 98
A4101



Indice de Rendu de Couleur IRC Color Rendering CRI 98 (+/-1)

Temperature de couleur Color CCT
 1800K - 2100K - 2400K - 2700K - 3000K - 3500K - 4000K - 5000K - 6000K

Rendement Luminous Efficacy
 60 lm/w - 90 lm/w

Puissance & nombre de led Power & number of Led
 23 w/m & 240 led/m | 20 w/m & 120 led/m | 10 w/m & 120 leds/m

Coupe Cut
 25 mm (23w) | 50 mm (20w/10w)

Dimensions Dimensions
 5000 mm x 10 mm x 2 mm

Température d'utilisation Ambient temp.
 - 10°C / + 40°C



A4101.20.120.924.IP20.DALI

Power & number led/m

| | |
|--------------------|--------|
| 23 w/m & 240 led/m | 23.240 |
| 20 w/m & 120 led/m | 20.120 |
| 10 w/m & 120 led/m | 10.120 |
| Custom (5 to 15W) | |

| Led Color | flux 10 w/m | 20 w/m | 23 w/m | |
|-------------|-------------|---------|---------|-----|
| 1800K YP35 | 650 lm | 1190 lm | 2415 lm | 918 |
| 2100K YN35 | 720 lm | 1320 lm | 2415 lm | 921 |
| 2400K YM25 | 750 lm | 1360 lm | 2530 lm | 924 |
| 2700K YK45 | 890 lm | 1625 lm | 2645 lm | 927 |
| 3000K YJ65 | 890 lm | 1625 lm | 2645 lm | 930 |
| 3500K YI45 | 890 lm | 1625 lm | 2780 lm | 935 |
| 4000K YH54 | 950 lm | 1735 lm | 2780 lm | 940 |
| 5000K YF50G | 950 lm | 1735 lm | 2780 lm | 950 |
| 6000K YC84 | 995 lm | 1825 lm | 2691 lm | 960 |

Custom binning Yxxx
 (See binning selection)


IP Rating

| | |
|-----------------------|------|
| IP 20 | IP20 |
| IP 67 TUBE | IP67 |
| Custom (IP20 or IP65) | |


Dimming

| | |
|-----------------------|------|
| No dimming | HF |
| Dali | DALI |
| Dmx | DMX |
| Dimming I to 10VDC | D10 |
| Phase dimming digital | PHA |


23w

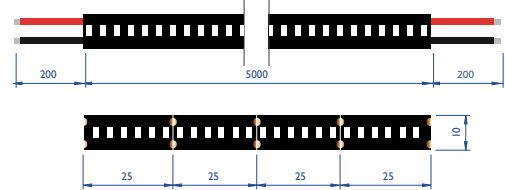




20w

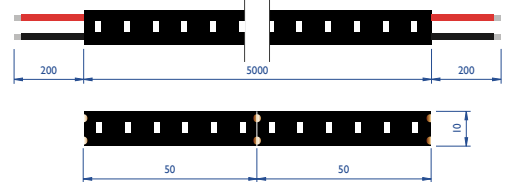




10w

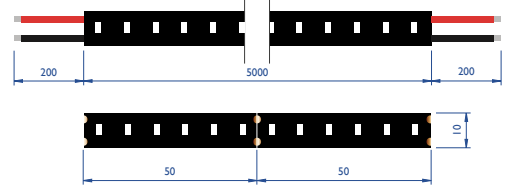


2100K | YN35 | $x = 0,516$ $y = 0,414$ | Ra 97 | R9 87 | CQS 97

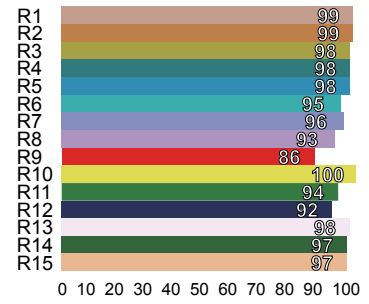




2400K | YM25 | $x = 0,487$ $y = 0,416$ | Ra 96 | R9 91 | CQS 95

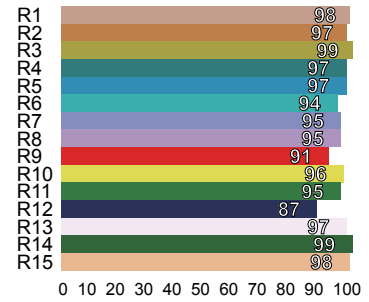




BINNING SELECTION FOR CUSTOM STRIP

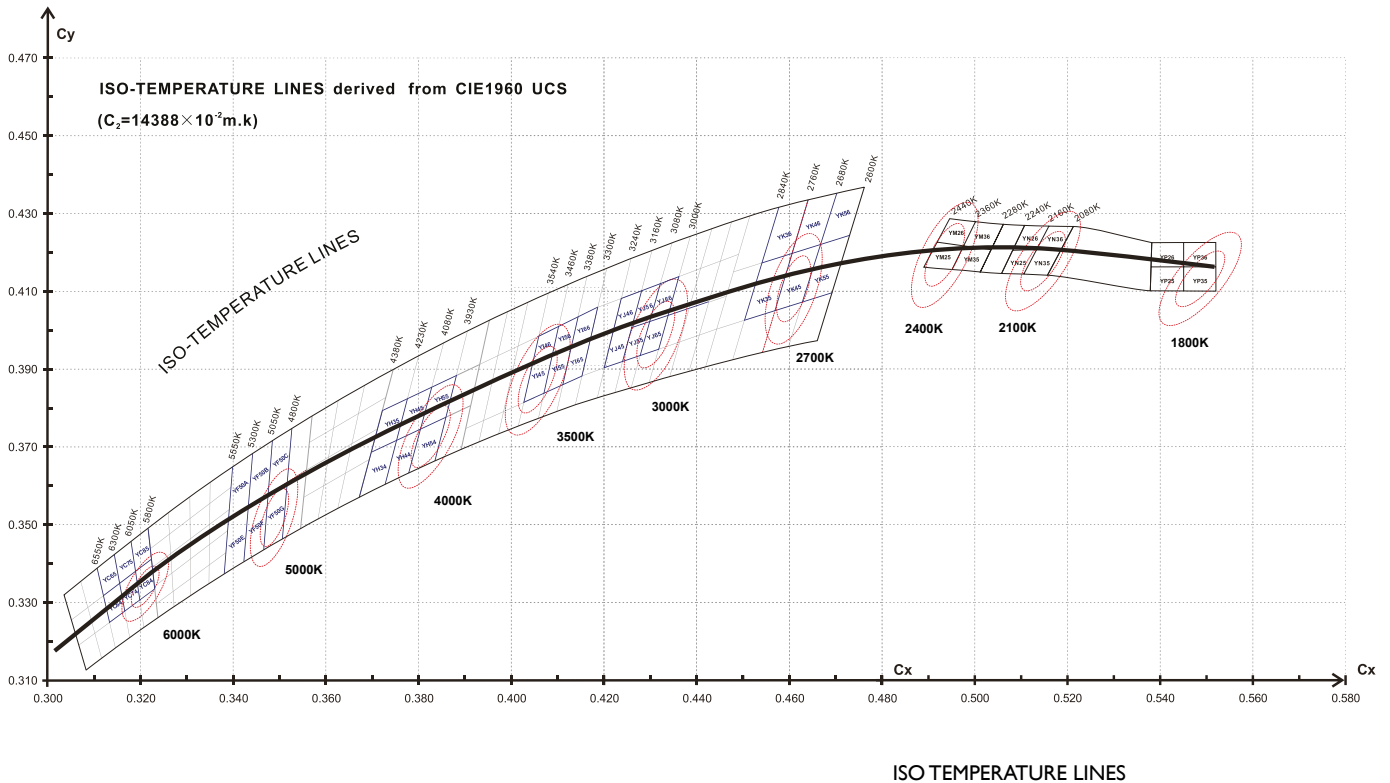




2700K | YK45 | $x = 0,460$ $y = 0,412$ | Ra 98 | R9 90 | CQS 94

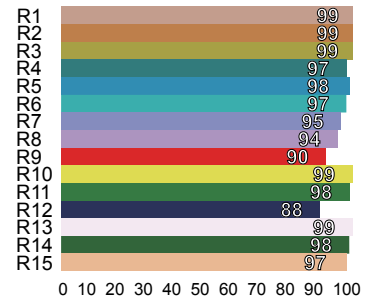




3000K | YJ65 | $x = 0,438$ $y = 0,406$ | Ra 97 | R9 90 | CQS 94

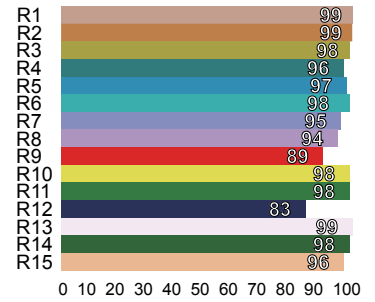

3500K | YI45 | $x = 0,405$ $y = 0,391$ | Ra 97 | R9 91 | CQS 94

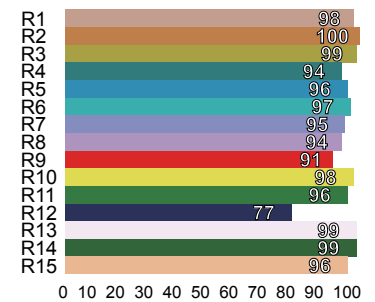

4000K | YH54 | $x = 0,380$ $y = 0,377$ | Ra 96 | R9 93 | CQS 93

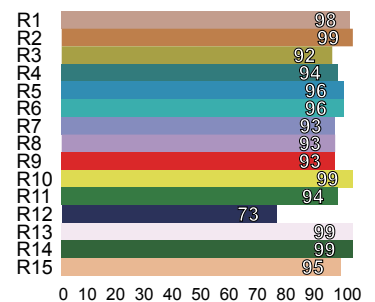

6000K | YC84 | $x = 0,320$ $y = 0,320$ | Ra 94 | R9 80 | CQS 90 | ANSI C78.377A

