

# ULTRA EFFICIENCY 96

Linear strip with high efficiency >173 lm/w and cri96  
Ruban haute efficacité >173 lm/w et cri96

A4196



**Indice de Rendu de Couleur IRC Color Rendering CRI**  
>96

**Température de couleur Color CCT**  
2200K - 2700K - 3000K - 3500K - 4000K - 5000K - 6500K

**Rendement Luminous Efficacy**  
(@4000K) 173 lm/w to 180 lm/w

**Puissance & nombre de led Power & number of Led**  
7.2 w/m 80 led/m | 11.5 w/m 128 led/m | 14.4w/m 160 led/m | 21.6w/m 240 led/m


**Coupe Cut**  
100 mm (7w) | 62.5 mm (11w) | 50 mm (14w) | 33.3 mm (21w)

**Dimensions Dimensions**  
5000 x 10 x 2 mm


**Température d'utilisation Ambient temp.**  
- 10°C / + 40°C

**Tension d'alimentation Input voltage**  
24Vdc


**21.6w & 240led/m**

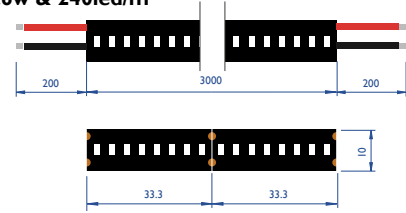


**14.4w & 160led/m**

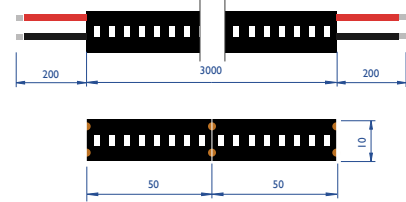

**11.5w & 128led/m**

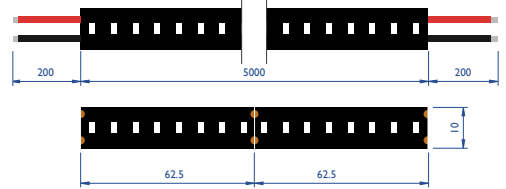

**7.2w & 80led/m**

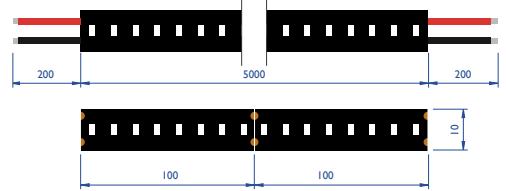

**A4196.21.240.930.IP20.DALI**

**Power & number led/m**

21.6 w/m & 240 led/m (173 lm/w @4000K)	21.240
14.4 w/m & 160 led/m (179 lm/w @4000K)	14.160
11.5 w/m & 128 led/m (180 lm/w @4000K)	11.128
7.2 w/m & 80 led/m (180 lm/w @4000K)	07.80

Led Color	11 w/m	14 w/m	21 w/m	
2200K	1610 lm	2010 lm	3020 lm	922
2700K	1900 lm	2370 lm	3560 lm	927
3000K	1900 lm	2370 lm	3560 lm	930
3500K	1950 lm	2450 lm	3640 lm	935
4000K	2070 lm	2590 lm	3730 lm	940
5000K	2070 lm	2590 lm	3730 lm	950

**IP Rating**

IP 20  
Custom (IP54 or IP65)

**Dimming**

No dimming  
Dali  
Dmx  
Dimming I to 10VDC  
Phase dimming digital

IP20

HF  
DALI  
DMX  
D10  
PHA