

REGULAR

CRI93 strip with latest LED generation
Ruban CRI93 de dernière génération

A4109



Indice de Rendu de Couleur IRC Color Rendering CRI

R9>70 - 93 (+/-2)

Temperature de couleur Color CCT

1800K - 2100K - 2400K - 2700K - 3000K - 4000K - 6000K - R - G - B - Y

Rendement Luminous Efficacy

90 lm/w - 110 lm/w

Puissance & nombre de led Power & number of Led

24 w/m & 240 led/m | 24 w/m & 120 led/m | 12 w/m & 60 led/m

Coupe Cut

25 mm (24w/240 led/m) | 50 mm (24w/120 led/m) | 100 mm (12w)

Dimensions Dimensions

5000 x 10 x 2 mm (24w) | 5000 x 8 x 2 mm (12w)


Température d'utilisation Ambient temp.

- 10°C / + 40°C


Tension d'alimentation Input voltage

24Vdc


24w & 240 led/m

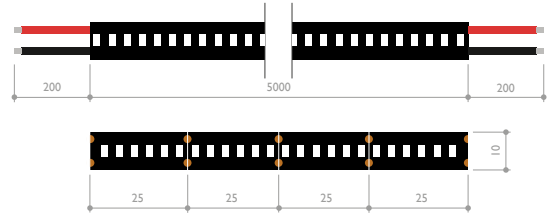

24w & 120 led/m

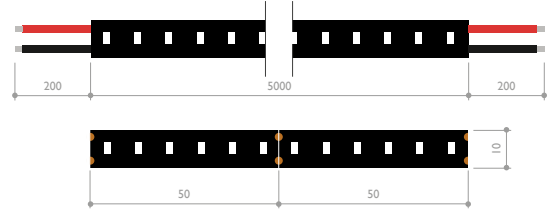

12w & 60 led/m

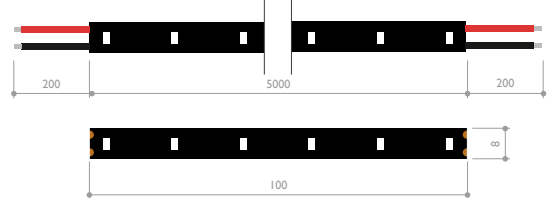

A4109.24.120.924.IP20.DALI

Power & number led/m

24 w/m & 240 led/m	24.240
24 w/m & 120 led/m	24.120
12 w/m & 60 led/m	12.60

Led Color	12 w/m 60 led/m	24 w/m 120 led/m	24 w/m 240 led/m	
1800K	1030 lm	2060 lm	2110 lm	918
2100K	1090 lm	2190 lm	2280 lm	921
2400K	1110 lm	2220 lm	2330 lm	924
2700K	1150 lm	2300 lm	2390 lm	927
3000K	1170 lm	2340 lm	2450 lm	930
4000K	1200 lm	2400 lm	2500 lm	940
6000K	1230 lm	2460 lm	2550 lm	960

IP Rating

IP 20	IP20
IP 65 H	IP65

Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming I to 10VDC	D10
Phase dimming digital	PHA

ATEA

REGULAR

