


PIXEL RGB

RGB DIGITAL strip with latest Monochip LED generation
 Ruban monochip RGB DIGITAL de dernière génération
A4120

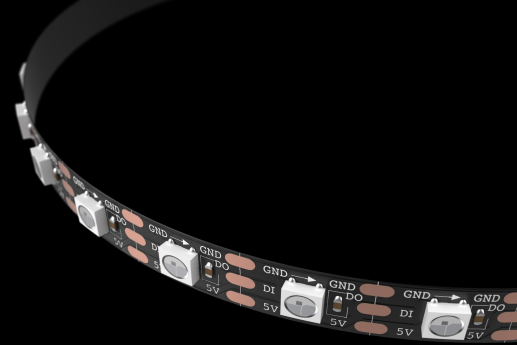

Couleur Color

■ R 620/625 nm | ■ G 520/525 nm | ■ B 465/470 nm

Puissance lumineuse Luminous output
 268 lm/m (5v) | 531 lm/m (12v/24v)

Puissance Power
 11w/m (5v) | 18w/m (12v/24v)

Nombre de led Number of led
 60 leds/m





Coupe Cut
 16.6mm (5v) | 50mm (12v) | 100 mm (24v)

Protocol & adresses Protocol & adresses
 SK6812 compatible with WS2812 (5v) | UCS1903 (12v/24v)
 180 adresses/m (5v) | 60 adresses/m (12v) | 30 adresses/m (24v)


Dimensions Dimensions
 5000 x 10 x 2 mm

Température d'utilisation Ambient temp.
 -10°C / +40°C

Tension d'alimentation Input voltage
 5v / 12v / 24v



A4120.15.60.12v.IP20.DMX

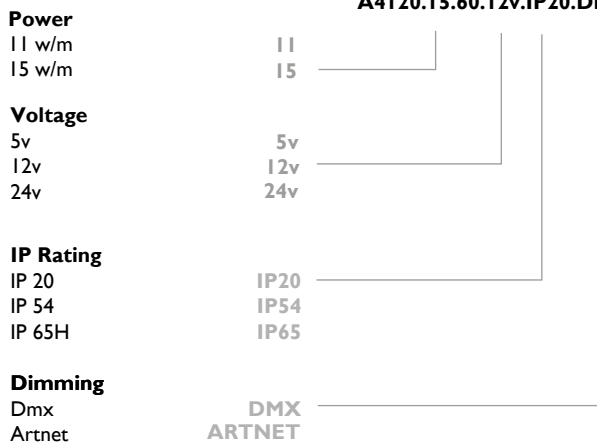

Controller DMX-SPI : A680202S
 available for UCS2904 / WS2812 / UCS1903 ...



ATEA

