

TOTEM XL OPTIC

Profile with range of optics
Profil avec gamme d'optiques

A3950




Puissance maxi Power max
40 w/m

Dimensions Dimensions
18 x 16 mm (20.5 x 23 mm with optic)

Longueur maximale Max.length
2000 mm

Température d'utilisation Ambient temp.
- 10°C / + 40°C

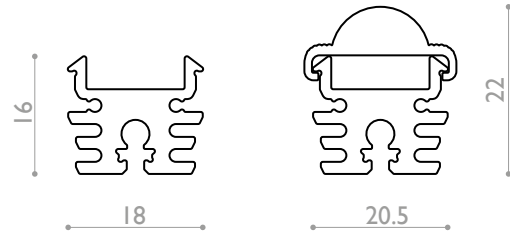

A3950.C9.IP20.00.F30.DALI

Type of led

Pure CRI99	A4199
UltraCRI	A4101
Dynamic White	A4102
Regular	A4109
RGB	A4106
RGB+W	A4107
RGB+2W	A4117
High Efficacy	A4111
Ultra Efficacy	A4116

C99
CR
DW
C9
RGB
RGBW
RGB2W
HE
UE

IP Rating

IP20
IP54
IP65H
IP65R Resin

IP20
IP54
IP65
IP65R

Finishes

Aluminium anodised silver
Aluminium anodised black

00
04

Cover & Optic

Opal
Frost
Frost 15°
Frost 30°
Frost 60°
Frost 90°
Batwings
Asymetric 30°

OP
FR
F15
F30
F60
F90
BAT
AS30

Dimming

No dimming
Dali
Dmx
Dimming & to 10Vdc
Phase Dimming Digital

HF
DALI
DMX
D10
PHD



A3950.04



A3950.CLP - Clips 0°



A3950.C15 - Clips 15°



A3950.C30 - Clips



A3950.C45 - Clips 45°



A3950.C60 - Clips 60°



A3950.CAD
Clips orientable



A3950.ECO
Clips oeillet



A3950.CLI
Clips Inox

TOTEM XL OPTIC

Profile with range of optics
 Profil avec gamme d'optiques

A3950

Get Dialux files on : www.atea.fr/3950.zip

