


GARLI

Profile with optic
Profil aluminium avec optique

A3945

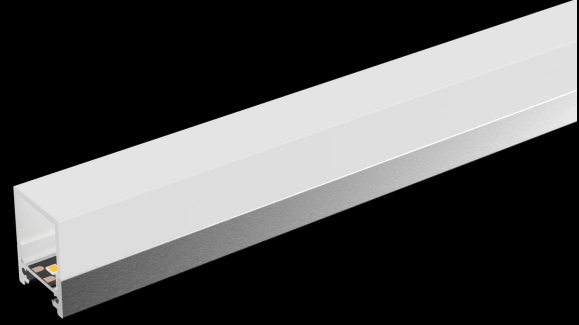



Puissance maxi Power max
25 w/m

Dimensions Dimensions
19 x 10.2 mm | 19 x 25 mm (High Optic)

Longueur maximale Max.length
3000 mm

Température d'utilisation Ambient temp.
- 10°C / + 40°

Tension alimentation Input voltage
24 Vdc



A3949.C9.OP.00.IP20.DALI

Type of led

Pure CRI99	A4199	C99
UltraCRI	A4101	CR
Dynamic White	A4102	DW
Regular	A4109	C9
RGB	A4106	RGB
RGB+W	A4107	RGBW
RGB+2W	A4117	RGB2W
High Efficacy	A4111	HE
Dim to warm	A4126	D2W
Ultra Efficiency 90	A4190	UE90
Ultra Efficiency 96	A4196	UE96

Optics

Opal
Frost
High Opal

OP
FR
HO

Finishes

Aluminium anodised silver
Aluminium anodised black
Painting RAL

00
04
RAL

IP Rating

IP20
IP54
IP65

IP20
IP54
IP65

Dimming

No dimming
Dali
Dmx
Dimming & to 10Vdc

HF
DALI
DMX
D10

Installations situations

