

# ROMULUS MINI

Profile with IP65 diffusor  
Profil avec diffuseur IP65

A39107




**Puissance maxi Power max**  
24 w/m

**Dimensions Dimensions**  
16 x 8 mm (16 x 11 mm with 30° optic)

**Longueur maximale Max.length**  
3000 mm

**Fil incandescent Glow wire test**  
Night&Day 650°C - Opal Frost 60° 850°C

**Température d'utilisation Ambient temp.**  
- 10°C / + 40°C

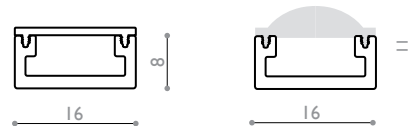

## A39107.C9.IP65.00.OP.DALI

### Type of led

Pure CRI99	A4199
UltraCRI	A4101
Dynamic White	A4102
Regular	A4109
RGB	A4106
RGBW	A4107
RGB2W	A4117
High Efficacy	A4111

### IP Rating

IP20	IP20
IP54	IP54
IP65H	IP65

### Finishes


Aluminium anodised silver	00
Aluminium anodised black	04

### Cover & Optic


Opal	PC	OP
Frost	PC	FR
Optic 30°	PC	F30
Night & Day		ND

### Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming & to 10Vdc	D10
Phase Dimming Digital	PHD

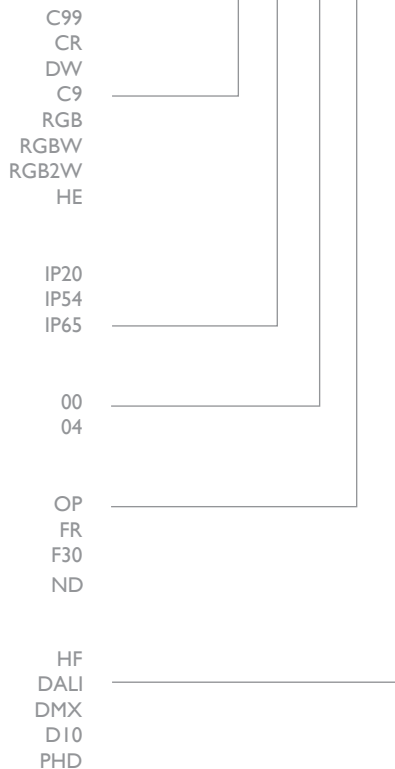


A39107.04.ND  
Night & Day



A39107.LP10.3  
Clips



A39107.LP04.2  
Endcap + hole



A39107.OP/FR  
Diffusor IP65 opal/fro



A39107.LP03.2  
Endcap



A39107.LP03.3  
Endcap for optic



A39107.OP/FR  
Diffusor IP65 opal/fro