

BELINI

Recessed profile with IP65 diffusor
Profil encastré avec diffuseur IP65

A39123




Puissance maxi Power max
24 w/m

Dimensions Dimensions
24 x 12 mm (15.8mm with optic 30° - Cut out 17mm)

Longueur maximale Max.length
3000 mm

Température d'utilisation Ambient temp.
- 10°C / + 40°C

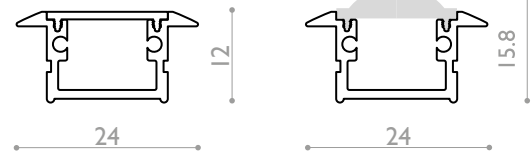

A39123.C9.IP20.00.OP.DALI

Type of led

Pure CRI99	A4199
UltraCRI	A4101
Dynamic White	A4102
Regular	A4109
RGB	A4106
RGB+W	A4107
RGB+2W	A4117
High Efficacy	A4111
Ultra Efficacy	A4116
Xicato Artist	A4122

C99
CR
DW
C9
RGB
RGBW
RGB2W
HE
UE
XLT

IP Rating

IP20
IP54
IP65H

IP20
IP54
IP65

Finishes

Aluminium anodised silver
Aluminium anodised black

00
04

Cover & Optic

Opal
Frost
Opac grey

OP
FR
GR

Dimming

No dimming
Dali
Dmx
Dimming & to 10Vdc
Phase Dimming Digital

HF
DALI
DMX
D10
PHD



A39123.ECP
Endcap



A39123.CLI
Clips inox



A39123.CLS
Ressort