

CENTO T

High Power recessed profile with driver integrated
 Profil encastré forte puissance avec driver intégré

A39180




Puissance maxi Power max
50 w/m

Dimensions Dimensions
126 x 68 mm

Longueur maximale Max.length
3000 mm

Température d'utilisation Ambient temp.
- 10°C / + 40°

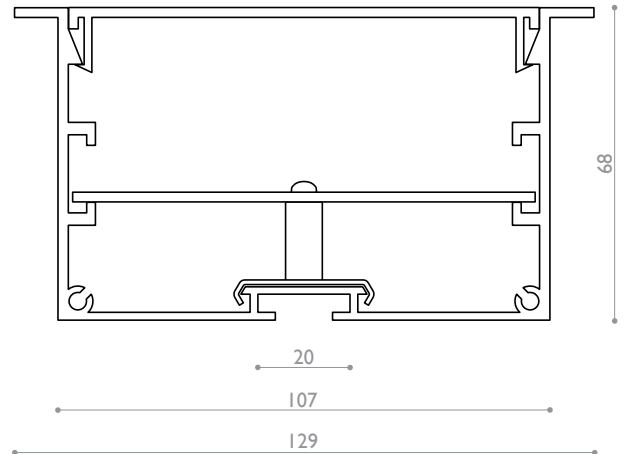

A39180.C9.IP20.00.OP.DALI

Type of led

UltraCRI	A4101	CR
Dynamic White	A4102	DW
Standard	A4108	ST
CRI92	A4109	C9
RGB	A4106	RGB
RGBW	A4107	RGBW
RGB2W	A4117	RGB2W
High Efficacy	A4111	HE
Ultra Efficacy	A4116	UE

IP Rating

IP20	IP20
IP54	IP54
IP65H	IP65

Finishes


Aluminium anodised silver	00
Aluminium anodised black	04

Cover & Optic

Opal	OP
Frost	FR
Prismatic UGR<19	PR
Aluminium	AL

Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming & to 10Vdc Phase	D10
Dimming Digital	PHD




A39180.XX




A39180.XX



A39180.XX




A39180.XX



A39180.XX



A39180.XX



A39180.XX



A39180.XX



A39180.XX