


Micro Pendant system

Micro Reflector Pendant

Miniature 3 Watt LED pendant

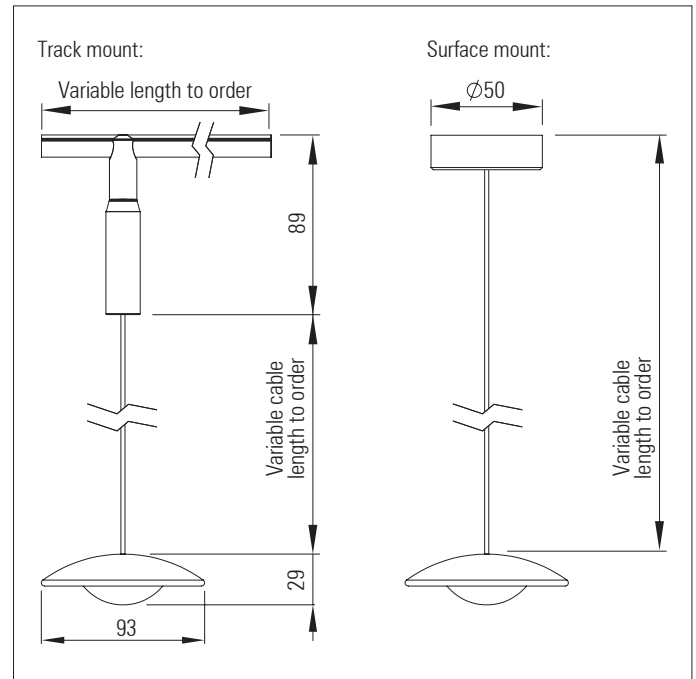

Micro Reflector LED Pendant

Miniature LED pendant for use with Radiant Micro Track system or with surface mount base

Designed to be used in a wide variety of hospitality and residential applications where the quality and control of light is of high importance.

Product description:

Miniature 3 Watt pendant

Each pendant - 6 x 0.5 Watt LEDs

Various LED colour temperature and CRI options available


The light output contains very little heat or UV - ideal for the illumination of sensitive materials

Miniature DC to DC dimmable LV constant current driver housed in the track adapter or surface mount base

Dimming options available: 1 - 10V, DALI or DMX

12 V DC Supply

Satin anodized silver finish, or satin white powder coat finish



Product Code	IP	Watts per pendant	Colour Temp. (K)	CRI	Length of cable (mm)	Mounting Type	Finish	Cable colour
MICRO REFLECTOR PENDANT	20	3	27=2,700k 30=3,000k 40=4,000k 45=4,500k 50=5,000k	80 90	2mm ϕ cable: 100mm - 2000mm 3.5mm ϕ cable: 100mm - 6000mm	Surface Track	Satin white Satin black Any RAL powder coat colour to order Any anodized finish	Black White Clear Nickel braid Other colours available on request