

CIVIC X165



SPECULAR SILVER, SATIN SILVER, WHITE

CIVIC X165 with Xicato LED surface mounted downlighter with deep cone reflector finished in specular silver; satin silver; or white, and black casing.
Overall diameter 165mm.



Beam Angle	Specular Silver	Satin Silver	White
Light Fixture IP20 - Up to 2000 lm			
20°	C9521	C9522	C9524
40°	C9541	C9542	C9544
60°	C9561	C9562	C9564


The latest Xicato XTM and XIM LED modules will soon be available and can be specified. Please contact us for availability.
To specify the Light Engine & Driver code please refer to pages 56-57.

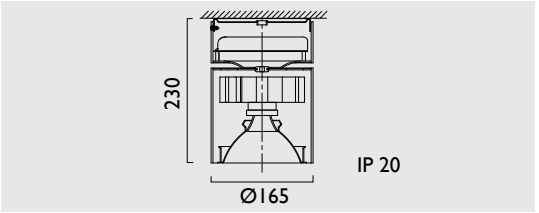

Intensity values in cds per 1,000 lumens.

	Lux/Klm	
1m	0.52	5125
2m	1.05	1281
3m	1.58	569
4m	2.11	320


20° Beam diameter to 50% of E max



Intensity values in cds per 1,000 lumens.

	Lux/Klm	
1m	0.72	1656
2m	1.45	414
3m	2.18	184
4m	2.90	103

40° Beam diameter to 50% of E max



Intensity values in cds per 1,000 lumens.

	Lux/Klm	
1m	1.15	1007
2m	2.30	251
3m	3.46	111
4m	4.61	63

60° Beam diameter to 50% of E max