


■ PRODUCT SPECIFICATION


Dimension	L5000/W10mm
PCB increment	Power connection and cut point every 100mm
LED pitch	16.67mm
Chip	Epistar
Beam angle	120°
Colours	White
Bin/step	3 Step MacAdam ellipse (+/-91K)
CRI	94.7
Lifetime	50000hrs@45°
Operating temp.	0 - 50°C
IP rating	IP20/54
Mounting	3M VHB backing tape
Minimum bend radius	10mm
Connection	Hardwire tails or male/female connectors
Control	0-10V/1-10V/DMX/DALI

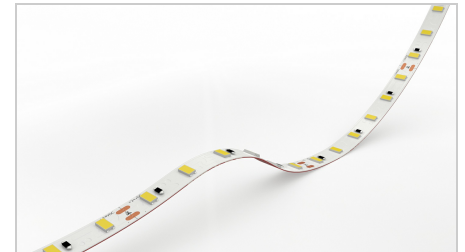

■ PERFORMANCE DATA (for 1000mm)

Power consumption	24.4W
Supply voltage	24V DC
Supply current	1.017A
Luminous flux	1984.6Lm/M

TECHNICAL DRAWING

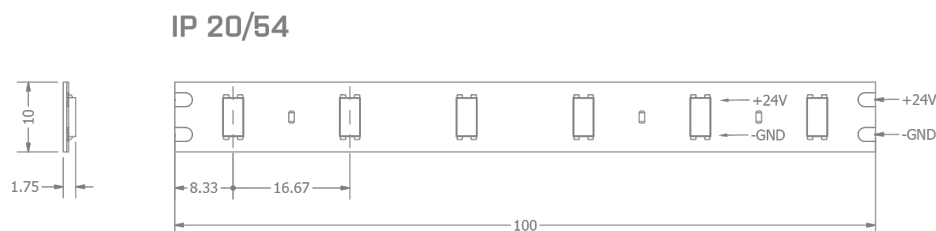

■ PRODUCT DETAILS

Product name	INTENSE FLEX 60
Stated output	1984.6lm per metre
Description	Flexible LED Tape, 3000K, 24V, 24.4W/m
Quantity/length of product tested	1 x 1000mm
Bin tolerance/#. MacAdams ellipse of chip	3 Step MacAdam ellipse (+/-91K)

■ ELECTRICAL CHARACTERISTICS

Input Voltage (V DC)	24
Input power (WDC)	24.4
Input Current (mA DC)	1017mA

■ LIGHT OUTPUT

Total light output (Lumens)	1984.6
Luminaire efficacy (lm/W)	81.34
Beam angle	120°


■ COLOUR CHARACTERISTICS

Correlated colour temperature (CCT)	3009K
Colour rendering index (CRI, Ra)	94.7
Chromaticity coordinates (CIE 1931 - x,y)	0.4311, 0.3931

COLOUR RENDERING INDEX

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
96	98	98	94	95	96	93	88	74	94	93	80	97	98	94

CHROMATICITY DIAGRAM

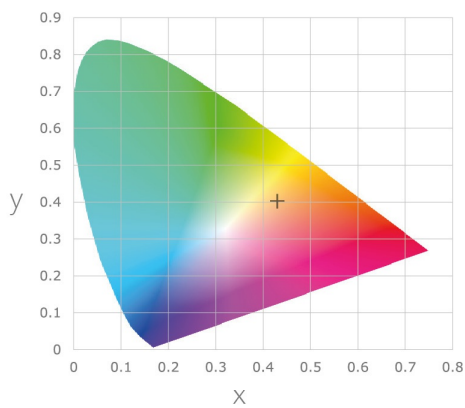

SPECTRAL RADIANT FLUX VERSUS WAVELENGTH

