

OUTSIDE



GENERAL SPECIFICATION

Body: Aluminum.

Finish: Powder coated.

Suspension: Stainless steel cables.

Power cable: Silver braided.

Diffuser: Protruding Lens (2.1mm/0.08").

Drivers: HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming.

Remote Mounting Of Drivers: Wire Size 18 AWG - Max distance (from canopy to drivers) 9.5', Wire size 16 AWG - Max distance 19.5', Wire size 14 AWG - Max distance 29.5'. Drivers must be accessible after installation.


Remote Emergency: Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

Mechanical: Luminaires mount directly over J box (by others - North America only).


L70 @25deg C: > 50,000 hrs.

Delivered Lumens: Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.


Approvals: Damp Location (Indoor use only).

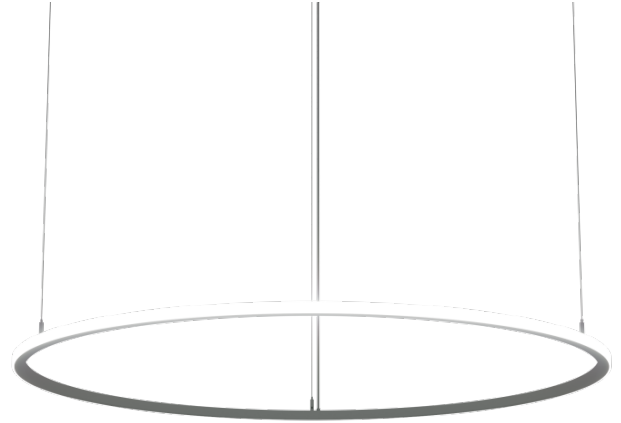


MOUNTINGS & OPTICS




Interior - Suspended-Outside




95 5305




95 5310




95 5320



95 5330



95 5340



95 5350

HOW TO ORDER

A SPECIFY LUMINAIRE

Code:	Diameter (A):	Power (LED):	Delivered lms:	LPW:	# of Sections:	Suspension Points:
95 5305	660mm/26"	28W	1680	60	1	3
95 5310	914mm/36"	36W	2160	60	1	3
95 5320	1219mm/48"	50W	3000	60	1	3
95 5330	1524mm/60"	61W	3660	60	1	3
95 5340	1829mm/72"	75W	4501	60	1	6
95 5350	2134mm/84"	90W	5399	60	1	6

B SPECIFY CCT/COLOR

T30	3000K (min 80 CRI)
T35	3500K (min 80 CRI)
T40	4000K (min 80 CRI)
TRD	Red
TGN	Green
TBL	Blue

C SPECIFY SUSPENSION

S1	Vertical, Remote Driver
S2	Hub, Remote Driver (available up to 1524mm/60" dia only)
S3	Vertical, Integral Driver
S4	Hub, Integral Driver (available up to 1524mm/60" dia only)

D SPECIFY FINISH

BL	Black
MS	Metallic Silver
WH	White

E SPECIFY LUMEN & WATTAGE REDUCTION

PRO	Lumen & Wattage Reduction to approximately 25% of standard output
PR1	Lumen & Wattage Reduction to approximately 50% of standard output
PR2	Lumen & Wattage Reduction to approximately 75% of standard output

Additional Information

Note: Custom Reduction Percentages Available Upon Request.

F SPECIFY OPTIONS


RE	Remote Emergency System
----	-------------------------

EXAMPLE SPECIFICATION CODE


955305/T35/S1/WH

DIMENSIONAL DIAGRAMS


S1 VERTICAL - REMOTE DRIVER

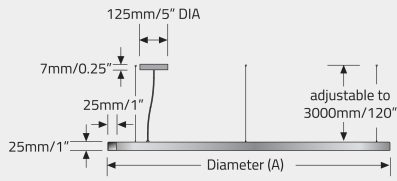


S3 VERTICAL - INTEGRAL DRIVER

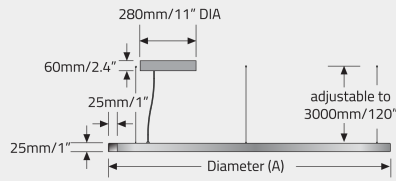

S2 HUB - REMOTE DRIVER

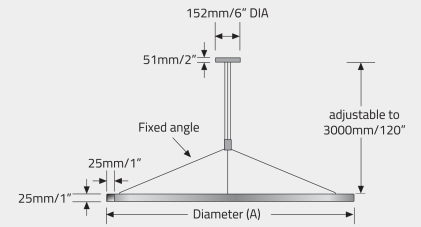

S4 HUB - INTEGRAL DRIVER

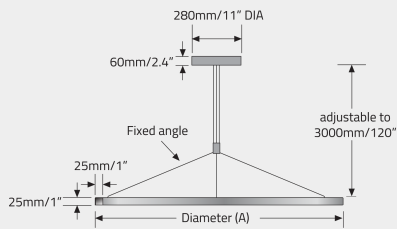

APPROVALS

