



GENERAL SPECIFICATION

Body: Aluminum.

Canopy: White powder coated.

Finish: Powder coated.

Suspension: Stainless steel cables.

Power cable: Silver braided.

Drivers: HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming.

Remote Mounting Of Drivers: Wire size 18 AWG - max distance (from fixture to drivers) 40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.

Mechanical: Luminaires mount directly over J box (by others - North America only).


Diffusers: Frosted acrylic. Lens protrudes 4.8mm/0.19".

L70 @25deg C: > 50,000 hrs.


Delivered Lumens: Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.

Approvals: Damp Location (Indoor use only).


MOUNTING & OPTICS




Suspended Direct



Suspended Direct/Indirect



Direct



Direct-indirect

HOW TO ORDER

A SPECIFY LUMINARIE LENGTH

Code:	Length:	Power (LED):	Light Direction:	Delivered lms (Length):	LPW:
98 3815	610mm/24"	13W	Direct	1650	125
98 3825	915mm/36"	20W	Direct	2474	124
98 3835	1219mm/48"	27W	Direct	3300	124
98 3845	1524mm/60"	33W	Direct	4124	124
98 3855	1803mm/71"	40W	Direct	4948	124
98 3865	2108mm/83"	47W	Direct	5774	124
98 3915	610mm/24"	27W	Direct/Indirect	3356	126
98 3925	915mm/36"	40W	Direct/Indirect	5034	126
98 3935	1219mm/48"	53W	Direct/Indirect	6712	126
98 3945	1524mm/60"	66W	Direct/Indirect	8390	126
98 3955	1804mm/71"	80W	Direct/Indirect	10068	126
98 3965	2108mm/83"	93W	Direct/Indirect	11746	126

Additional Information

Calculate total lumens and wattage by adding the Length lumens to the Width lumens. For example: direct only 36" length + 48" width = 2474 + 3300 = 5774 total lumens.

B SPECIFY WIDTH

Code:	Width:	Power (LED):	Light Direction:	Delivered lms (Width):	LPW:
WD24	610mm/24"	13W	Direct	1650	125
WD36	915mm/36"	20W	Direct	2474	124
WD48	1219mm/48"	27W	Direct	3300	124
WD60	1524mm/60"	33W	Direct	4124	124
WD71	1834mm/71"	40W	Direct	4948	124
WD83	2108mm/83"	47W	Direct	5774	124
WDI24	610mm/24"	27W	Direct/Indirect	3356	126
WDI36	915mm/36"	40W	Direct/Indirect	5034	126
WDI48	1219mm/48"	53W	Direct/Indirect	6712	126
WDI60	1524mm/60"	66W	Direct/Indirect	8390	126
WDI71	1804mm/71"	80W	Direct/Indirect	10068	126
WDI83	2108mm/83"	93W	Direct/Indirect	11746	126

C SPECIFY CCT/COLOR (DIRECT)

D30	3000K (min 80CRI)
D35	3500K (min 80CRI)
D40	4000K (min 80CRI)
DRD	Red
DGN	Green
DBL	Blue

D SPECIFY CCT/COLOR (INDIRECT)

N30	3000K (min 80 CR)
N35	3500K (min 80 CR)
N40	4000K (min 80 CR)
NRD	Red
NGN	Green
NBL	Blue

E SPECIFY SUSPENSION

S1	Vertical, Remote Driver
S3	Vertical, Integral Driver

F SPECIFY FINISH

Z1	Wood Grain - Light Cherry
Z2	Wood Grain - Dark Walnut

G SPECIFY LUMEN & WATTAGE REDUCTION

PR1	Lumen & Wattage Reduction to approximately 50% of standard Output
PR2	Lumen & Wattage Reduction to approximately 75% of standard Output

Additional Information


PR1 is on available with 983815. Custom reduction percentages available upon request.

EXAMPLE CODE



983815/W71/D30/N30/S1/Z1

DIMENSIONAL DIAGRAMS

SI - VERTICAL, REMOTE DRIVER

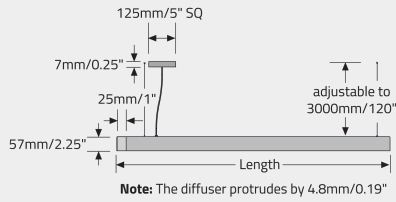

S3 - VERTICAL, INTEGRAL DRIVER

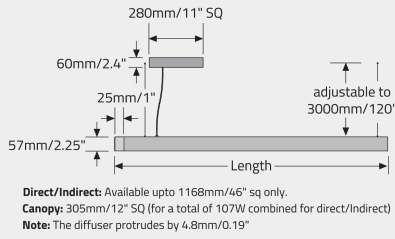

APPROVALS

