

## GENERAL SPECIFICATION

**Body:** Aluminum, Equilateral Triangle

**Finish:** Powder coated.

**Suspension:** Stainless steel cables.

**Power cable:** Silver braided.

**Drivers:** HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming.

**Remote Mounting Of Drivers:** Wire Size 18 AWG - Max distance (from canopy to drivers) 9.5', Wire size 16 AWG - Max distance 19.5', Wire size 14 AWG - Max distance 29.5'. Drivers must be accessible after installation.

**Mechanical:** Luminaires mount directly over J box (by others - North America only).

**Diffusers:** Frosted acrylic.

**L70 @25deg C:** > 50,000 hrs.


**Delivered Lumens:** Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.

**Approvals:** Damp Location (Indoor use only).


## MOUNTINGS & OPTICS




Interior - Suspended Direct




Interior - Suspended Direct & Indirect




98 4010




98 4020




98 4030




98 4040




98 4050




98 4110




98 4120



98 4130



98 4140



98 4150

## HOW TO ORDER

### A SPECIFY LUMINAIRE

Code:	Length:	Power (LED):	Light Direction:	Delivered lms:	LPW:
98 4010	610mm/24"	20W	Direct	2464	123
98 4020	915mm/36"	30W	Direct	3700	123
98 4030	1219mm/48"	40W	Direct	4932	123
98 4040	1524mm/60"	50W	Direct	6165	123
98 4050	1829mm/72"	60W	Direct	7400	123
98 4110	610mm/24"	40W	Direct/Indirect	4997	125
98 4120	915mm/36"	60W	Direct/Indirect	7492	125
98 4130	1219mm/48"	80W	Direct/Indirect	9965	125
98 4140	1524mm/60"	100W	Direct/Indirect	12482	125
98 4150	1829mm/72"	120W	Direct/Indirect	14985	125

### B SPECIFY CCT/COLOR (DIRECT)

D30	3000K (min 80 CRI)
D35	3500K (min 80 CRI)
D40	4000K (min 80 CRI)
DRD	Red
DGN	Green
DBL	Blue

### C SPECIFY CCT/COLOR (INDIRECT)

N30	3000K (min 80 CRI)
N35	3500K (min 80 CRI)
N40	4000K (min 80 CRI)
NRD	Red
NGN	Green
NBL	Blue

### D SPECIFY SUSPENSION

S1	Vertical, Remote Driver
S2	Hub, Remote Driver (1219mm/48" max)
S3	Vertical, Integral Driver
S4	Hub, Integral Driver (1219mm/48" max)
S6	Power Over Aircraft Cable, Vertical, Remote Driver (max 60W), 72" Max

#### Additional Information

S6 Option available in North America only.

### E SPECIFY FINISH

BL	Black
MS	Metallic Silver
WH	White
Z1	Wood Grain - Light Cherry
Z2	Wood Grain - Dark Walnut

## F SPECIFY LUMEN & WATTAGE REDUCTION

- PRO** Lumen & Wattage Reduction to approximately 25% of standard output
- PR1** Lumen & Wattage Reduction to approximately 50% of standard Output
- PR2** Lumen & Wattage Reduction to approximately 75% of standard output

### Additional Information


*Note: Custom Reduction Percentages Available Upon Request.*

## EXAMPLE SPECIFICATION CODE


984005/D35/N35/S1/BL

## DIMENSIONAL DIAGRAMS


S1 VERTICAL - REMOTE DRIVER

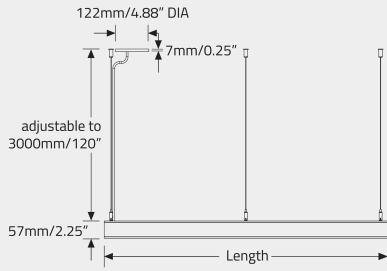


S3 VERTICAL - INTEGRAL DRIVER

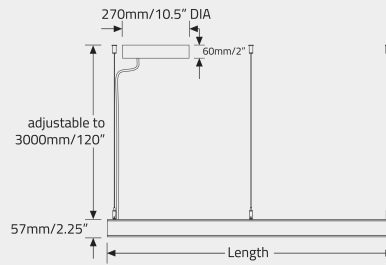

S6 VERTICAL - REMOTE DRIVER

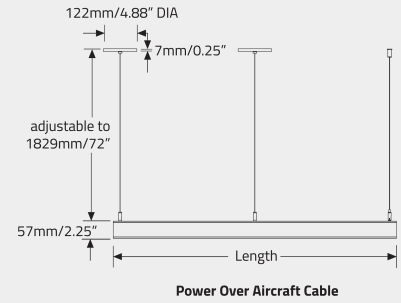


S2 HUB - REMOTE DRIVER

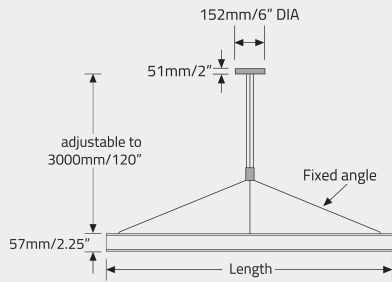


**Direct:** Available up to 1219mm/48" DIA only.  
**Direct/Indirect:** Available up to 1219mm/48" DIA only.

S4 HUB - INTEGRAL DRIVER

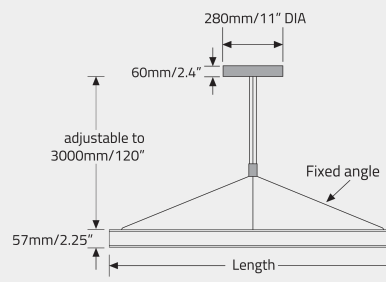

**Direct:** Available up to 1219mm/48" DIA only.  
**Direct/Indirect:** Available up to 1219mm/48" DIA only.

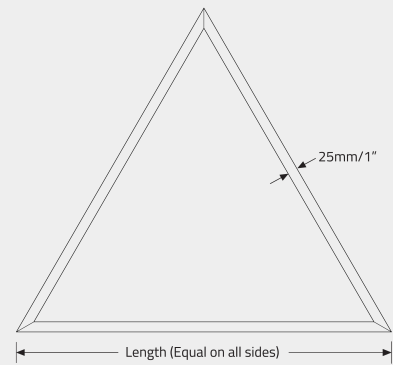

## APPROVALS

