



## GENERAL SPECIFICATION

**Body:** Aluminum, Equilateral Triangle

**Finish:** Powder coated.

**Suspension:** Stainless steel cables.

**Power cable:** Silver braided.

**Drivers:** HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming.

**Remote Mounting Of Drivers:** Wire Size 18 AWG - Max distance (from canopy to drivers) 9.5', Wire size 16 AWG - Max distance 19.5', Wire size 14 AWG - Max distance 29.5'. Drivers must be accessible after installation.

**Mechanical:** Luminaires attached directly to the J box (by others - North America only).


**Diffusers:** Frosted acrylic.

**L70 @25deg C:** > 50,000 hrs.


**Delivered Lumens:** Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.

**Approvals:** Damp Location (Indoor use only).


## MOUNTINGS & OPTICS




Interior - Suspended-  
Inside



98 4210



98 4220



98 4230

## HOW TO ORDER

### A SPECIFY LUMINAIRE

Code:	Length:	Power (LED):	Light Direction:	Delivered lms:	LPW:
98 4210	610mm/24"	20W	Inside	2210	111
98 4220	915mm/36"	30W	Inside	3460	116
98 4230	1219mm/48"	40W	Inside	4571	115

### B SPECIFY CCT/COLOR

30	3000K (min 80 CRI)
35	3500K (min 80 CRI)
40	4000K (min 80 CRI)
RD	Red
GN	Green
BL	Blue

### C SPECIFY SUSPENSION

S1	Vertical, Remote Driver
S2	Hub, Remote Driver
S3	Vertical, Integral Driver
S4	Hub, Integral Driver

### D SPECIFY FINISH

BL	Black
MS	Metallic Silver
WH	White
Z1	Wood Grain - Light Cherry
Z2	Wood Grain - Dark Walnut

### E SPECIFY LUMEN & WATTAGE REDUCTION

PRO	Lumen & Wattage Reduction to approximately 25% of standard output
PR1	Lumen & Wattage Reduction to approximately 50% of standard Output
PR2	Lumen & Wattage Reduction to approximately 75% of standard Output

#### Additional Information


*Note: Custom Reduction Percentages Available Upon Request.*

**EXAMPLE SPECIFICATION CODE**


**984205/30/S1/WH**

## DIMENSIONAL DIAGRAMS


S1 VERTICAL - REMOTE DRIVER

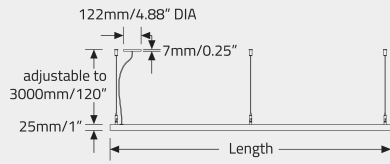



S3 VERTICAL - INTEGRAL DRIVER

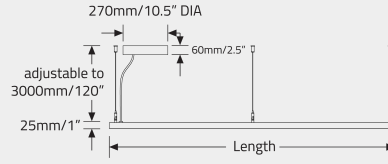

S2 HUB - REMOTE DRIVER

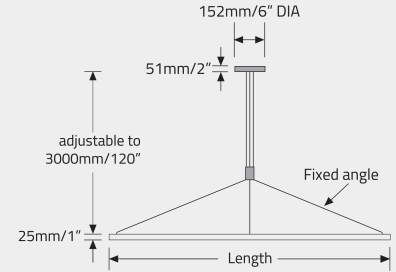

S4 HUB - INTEGRAL DRIVER

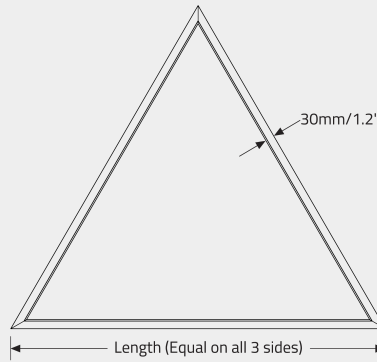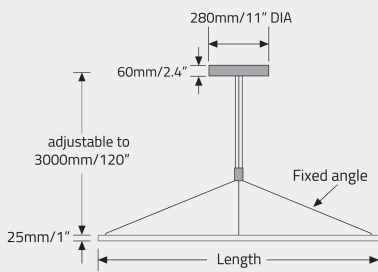

## APPROVALS

