

DIRECT



## GENERAL SPECIFICATION

**Body and trim:** Aluminum.

**Finish:** Powder coated.

**Suspension:** Stainless steel cables.

**Power cable:** Silver braided.

**Diffuser:** Protruding Lens (2.1mm/0.08").

**Drivers:** HPF electronic drivers for 120-277V, 0-10V, 1% dimming.

**Remote Mounting Of Drivers:** Wire Size 18 AWG - Max distance (from canopy to drivers) 9.5'; Wire size 16 AWG - Max distance 19.5'; Wire size 14 AWG - Max distance 29.5'. Drivers must be accessible after installation.


**Remote Emergency:** Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

**Mechanical:** Luminaires mount directly over J box (by others - North America only).

**L70 @25deg C:** > 50,000 hrs.

**Delivered Lumens:** Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.


**Approvals:** Damp Location (Indoor use only).

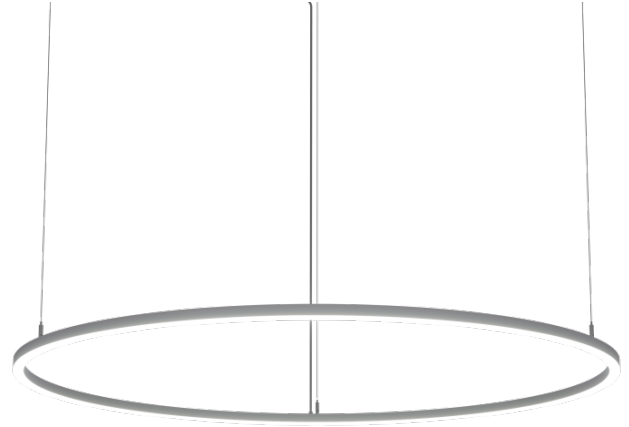


## MOUNTINGS & OPTICS




Interior - Suspended Direct




95 4005




95 4010




95 4020



95 4030



95 4040



95 4050

## HOW TO ORDER

### A SPECIFY LUMINAIRE

Code:	Diameter (A):	Power (LED):	Delivered lms:	LPW:	# of Sections:	Suspension Points:
95 4005	660mm/26"	28W	2212	79	1	3
95 4010	914mm/36"	39W	3081	79	1	3
95 4020	1219mm/48"	50W	3950	79	1	3
95 4030	1524mm/60"	68W	5360	79	1	3
95 4040	1829mm/72"	80W	6320	79	1	6
95 4050	2134mm/84"	95W	7504	79	1	6

### B SPECIFY CCT/COLOR

30	3000K (min 80 CRI)
35	3500K (min 80 CRI)
40	4000K (min 80 CRI)
RD	Red
GN	Green
BL	Blue

### C SPECIFY SUSPENSION

S1	Vertical, Remote Driver
S2	Hub, Remote Driver (available up to 1524mm/60" Dia.)
S3	Vertical, Integral Driver
S4	Hub, Integral Driver (available up to 1524mm/60" Dia.)

### D SPECIFY FINISH

BL	Black
MS	Metallic Silver
WH	White

### E SPECIFY LUMEN & WATTAGE REDUCTION

PRO	Lumen & Wattage Reduction to approximately 25% of standard output
PR1	Lumen & Wattage Reduction to approximately 50% of standard output
PR2	Lumen & Wattage Reduction to approximately 75% of standard output

#### Additional Information

Note: Custom Reduction Percentages Available Upon Request.

### F SPECIFY OPTIONS


RE	Remote Emergency System
----	-------------------------

**EXAMPLE SPECIFICATION CODE**


**954005/35/S2/BL**

## DIMENSIONAL DIAGRAMS


S1 VERTICAL, REMOTE DRIVER

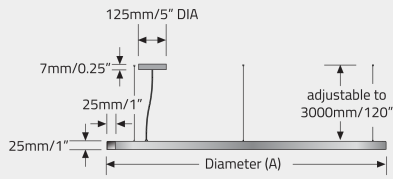

S3 VERTICAL, INTEGRAL DRIVER

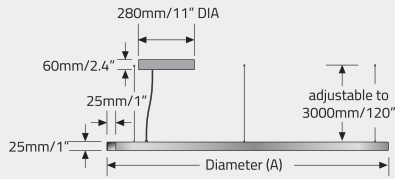


S2 HUB, REMOTE DRIVER

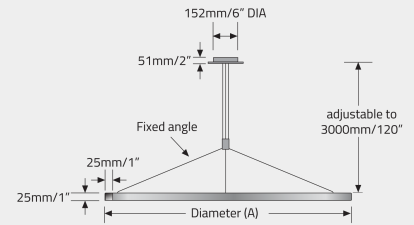

**Direct:** Available upto 1524mm/60° DIA only.  
**Direct/Indirect:** Available upto 1524mm/60° DIA only.

S4 HUB, INTEGRAL DRIVER

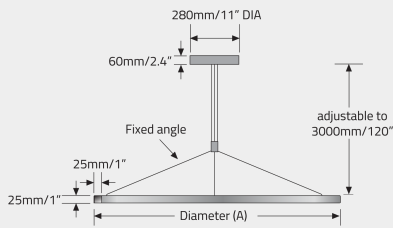

**Direct:** Available upto 1524mm/60° DIA only.  
**Direct/Indirect:** Available upto 1524mm/60° DIA only.

## APPROVALS

