

INSIDE/OUTSIDE



GENERAL SPECIFICATION

Body: Aluminum.

Finish: Powder coated.

Suspension: Stainless steel cables.

Power cable: Silver braided.

Diffuser: Protruding Lens (2.1mm/0.08").

Drivers: HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming.

Remote Mounting Of Drivers: Wire Size 18 AWG - Max distance (from canopy to drivers) 9.5', Wire size 16 AWG - Max distance 19.5', Wire size 14 AWG - Max distance 29.5'. Drivers must be accessible after installation.


Remote Emergency: Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

Mechanical: Luminaires attached directly to the J box (by others - North America only).


L70 @25deg C: > 50,000 hrs.

Delivered Lumens: Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.


Approvals: Damp Location (Indoor use only).

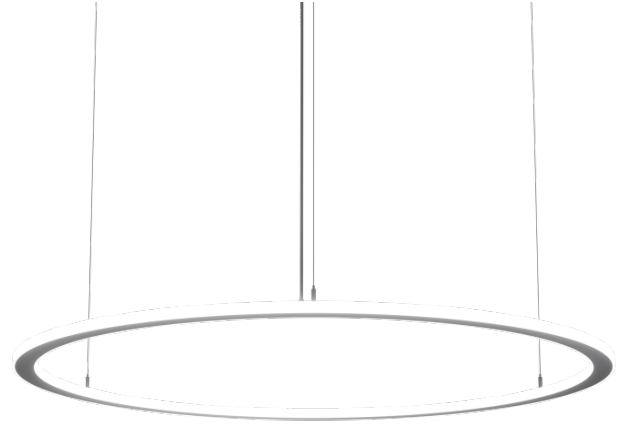


MOUNTINGS & OPTICS




Interior - Suspended-
Inside/Outside




95 2005




95 2010




95 2020




95 2030




95 2040



95 2050



95 2060



95 2090

HOW TO ORDER

A SPECIFY LUMINAIRE

Code:	Diameter (A):	Power (LED):	Delivered lms:	LPW:	# of Sections:	Suspension Points:
95 2005	660mm/26"	61W	3538	58	1	3
95 2010	914mm/36"	84W	4872	58	1	3
95 2020	1219mm/48"	108W	6264	58	1	3
95 2030	1524mm/60"	141W	8178	58	1	3
95 2040	1829mm/72"	168W	9744	58	1	4
95 2050	2134mm/84"	196W	11310	58	1	4
95 2060	2438mm/96"	228W	13224	58	2	6
95 2090	3657mm/144"	345W	20010	58	2	8

B SPECIFY CCT/COLOR (OUTSIDE)

T30	3000K (min 80 CRI)
T35	3500K (min 80 CRI)
T40	4000K (min 80 CRI)
TRD	Red
TGN	Green
TBL	Blue

C SPECIFY CCT/COLOR (INSIDE)

S30	3000K (min 80 CRI)
S35	3500K (min 80 CRI)
S40	4000K (min 80 CRI)
SRD	Red
SGN	Green
SBL	Blue

D SPECIFY SUSPENSION

S1	Vertical, Remote Driver (2 canopies required for 2438mm/96" to 3657mm/144")
S2	Hub, Remote Driver (available up to 2134mm/84" dia only)
S3	Vertical, Integral Driver (available up to 1219mm/48" dia only)
S4	Hub Integral Driver (available up to 1219mm/48" dia only)

E SPECIFY FINISH

BL	Black
MS	Metallic Silver
WH	White

F SPECIFY LUMEN & WATTAGE REDUCTION

- PRO** Lumen & Wattage Reduction to approximately 25% of standard output
- PR1** Lumen & Wattage Reduction to approximately 50% of standard output
- PR2** Lumen & Wattage Reduction to approximately 75% of standard output

Additional Information

Note: Custom Reduction Percentages Available Upon Request.

G SPECIFY OPTIONS


- RE** Remote Emergency System

EXAMPLE SPECIFICATION CODE


952005/T35/SRD/S1/BL

DIMENSIONAL DIAGRAMS


S1 VERTICAL - REMOTE DRIVER

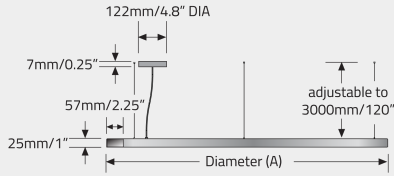


S3 VERTICAL - INTEGRAL DRIVER

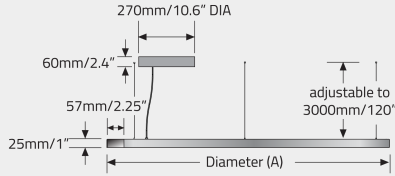

S2 HUB - REMOTE DRIVER

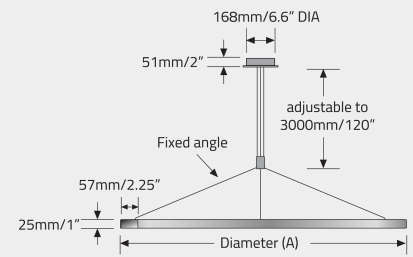

S4 HUB - INTEGRAL DRIVER

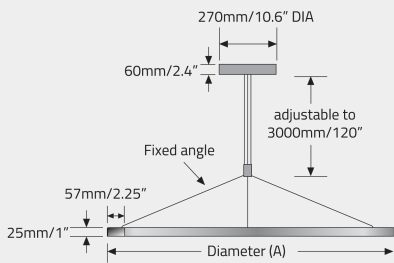

APPROVALS

