

THE LUX COMPANY Demo AEH Circular Drum Pendant



THE
LUX
COMPANY


DESCRIPTION



Available in ø600 mm and ø1200 mm

These ultra-modern professional decorative pendants can make a bold statement in any high-end, contemporary application. Featuring a white extruded aluminium body, available in two sizes, Demo pendants are characterised by their clean, smooth curves and even, diffused illumination. In addition to adjustable suspension wires, powerful output and dimming options, pre-wired plug and socket systems are available on request.

SPECIFICATIONS

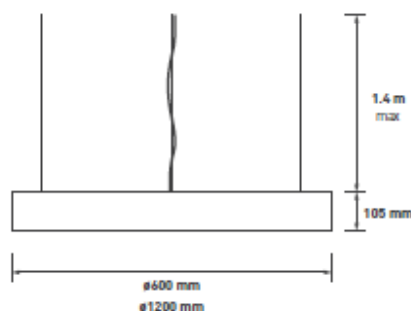

Nominal weight (ø600 mm)	6.5 kg
Nominal weight (ø1200 mm)	22.0 kg
Mains voltage	220 - 240 V
Mains frequency	50 - 60 Hz
Ingress protection	IP20
Mains lead	2 m 3 core
Mains lead (/ECO)	2 m 5 core
Max warranted operating ambient temperature	25°C
Warranty	5 years
Power factor	>0.9
Colour rendering	R _a >80
Suspension kit (ø600 mm)	3 x 1.4 m steel wires
Suspension kit (ø1200 mm)	4 x 1.4 m steel wires



PERFORMANCE DATA

Diameter	Colour Temp (K)	Luminaire Output (LLm)	Luminaire Power (W)	Luminaire Efficacy (LLm/W)	UGR	Model Ref
600 mm	4000	4777	53.5	89.3	22.5	AEH001
1200 mm	4000	15703	136.6	115.0	21.8	AEH002



LIFE

Model Ref (Opal Diffuser)	25°C ambient temperature
	L70 / B50
AEH001	50,000 h
AEH002	50,000 h

"L VALUE" = % of initial lumens maintained after specified time

"B VALUE" = % of fittings that will have depreciated below the L value after specified time

EXAMPLE - 50,000 hours L70 / B50

"L70" = 70% of initial lumens maintained after 50,000 hours

"B50" = 50% of fittings will have depreciated below 70% of the initial lumens after 50,000 hours

OR 50% of fittings will have maintained 70% of the initial lumens after 50,000 hours

OPTIONS



/ECO
SwitchDIM, DALI or DSI



Contact Sales
Choice of pre-wired plug
& socket systems to save
time and money