

THE LUX COMPANY ABG Decorative LED Pendant with Tridonic LLE





THE
LUX
COMPANY

DESCRIPTION




Decorative hand finished pendant with integrated Tridonic LLE LED module to aid Part L compliance. Fitted with a high transmission frosted diffuser for homogeneous illumination. Offered in a choice of three colourways with bespoke finishes available upon request. Supplied with adjustable 2 m suspension cables. Complements the Deco ABF range of decorative LED pendants.

SPECIFICATIONS

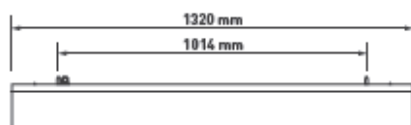

Nominal weight	6 kg
Mains voltage	220 - 240 V
Mains frequency	50 - 60 Hz
Ingress protection (front)	IP20
Ingress protection (rear)	IP20
Mains lead	2 m 3 core black PVC
Operating ambient temperature	-25°C to +35°C
MacAdam	3 SDCM
Warranty	5 years
Power factor	>0.9
Colour rendering	R _a 80



PERFORMANCE DATA

Colour Temp (K)	Luminaire Output (Llm)	Luminaire Power (W)	Luminaire Efficacy (Llm/W)	Model Ref
3000	1389	11.0	126.2	ABG001
4000	1409	11.0	128.1	ABG002



LIFE

Model Ref	35°C Ambient Temperature		
	L90 / F10	L80 / F10	L70 / F10
ABG001	23,000 h	49,000 h	>60,000 h
ABG002	23,000 h	49,000 h	>60,000 h

"L VALUE" = % of initial lumens maintained after specified time

"F VALUE" = % of fittings failing to meet operational expectations after specified time


EXAMPLE - 60,000 hours L80 / F10

"L80" = 80% of initial lumens maintained after 60,000 hours


"F10" = 10% of fittings will have maintained less than 80% of initial lumens after 60,000 hours

OR 90% of fittings will have maintained at least 80% of initial lumens after 60,000 hours


OPTIONS




/B
Black satin outer, white satin inner



/G
Grey satin outer, white satin inner



/R
Red gloss outer, white satin inner



Product variations
Other colours and specifications available on request



LED pendants available
Please see ABF datasheet