

THE LUX COMPANY ID LED Pendant with Philips DLM Flex




THE
LUX
COMPANY

DESCRIPTION



The ID LED pendant is ideal for open ceilings and high atriums in a range of applications including retail, hospitality, leisure, museums and galleries. Powered by the Philips DLM Flex module and Xitanium driver for optimum performance, it features a polycarbonate Lexalite Reflexor refractor and is supplied with an adjustable 2 m suspension kit as standard, with a 5 m option. In addition, a conical lens accessory is also available.

SPECIFICATIONS

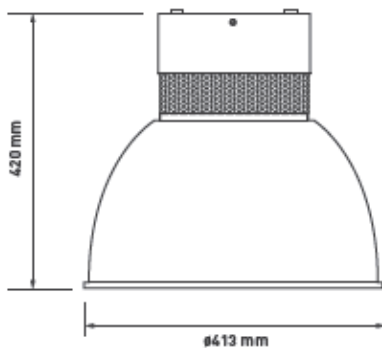

Nominal weight	1.8 kg
Mains voltage	220 - 240 V
Mains frequency	50 - 60 Hz
Ingress protection (front)	IP20
Ingress protection (rear)	IP20
Mains lead	2 m LSF
Operating ambient temperature	-25°C to +35°C
Colour consistency - MacAdam Ellipse	3 SDCM
Warranty	5 years
Power factor	>0.9
Colour rendering	R _a 80





PERFORMANCE DATA

Colour Temp (K)	Luminaire Output (Llm)	Luminaire Power (W)	Luminaire Efficacy (Llm/W)	Model Ref
3000	955	11.0	86.5	ID1130
3000	1871	20.6	90.8	ID2030
3000	2847	30.1	94.6	ID3030
3000	4465	48.5	92.0	ID5030
4000	1037	11.2	92.9	ID1140
4000	2032	20.6	98.7	ID2040
4000	3088	30.0	103.0	ID3040
4000	4844	48.6	99.6	ID5040

LIFE

Model Ref	25°C Ambient Temperature		
	L90 / B10	L80 / B10	L70 / B10
ID1130	21,000 h	45,000 h	>60,000 h
ID1140	21,000 h	45,000 h	>60,000 h
ID2030	21,000 h	45,000 h	>60,000 h
ID2040	21,000 h	45,000 h	>60,000 h
ID3030	21,000 h	45,000 h	>60,000 h
ID3040	21,000 h	45,000 h	>60,000 h
ID5030	19,000 h	41,000 h	>60,000 h
ID5040	19,000 h	41,000 h	>60,000 h

"L VALUE" = % of initial lumens maintained after specified time

"B VALUE" = % of fittings that will have depreciated below the L value after specified time

EXAMPLE - 50,000 hours L70 / B50

"L70" = 70% of initial lumens maintained after 50,000 hours

"B50" = 50% of fittings will have depreciated below 70% of the initial lumens after 50,000 hours

OR 50% of fittings will have maintained 70% of the initial lumens after 50,000 hours



OPTIONS



T+DALI
Touch dimming / DALI




94.SUS/5M/3C
5 m fixed output
suspension kit



94.SUS/5M/5C
5 m T+DALI suspension
kit

FINISHES



MIX OR MATCH
Finishes may be mixed or
matched as required



/WW
White finish



/GG
Grey finish



/BB
Black finish



Example: /WB
White, Black

ACCESSORIES



/4700
Conical lens complete
with clamp band