

GENERAL SPECIFICATION

Body: Aluminum.

Finish: Powder coated for standard finishes (black, metallic silver & white). For wood grain finishes, the canopy will be white.

Suspension: Stainless steel cables.

Power cable: Silver braided.

Diffuser: Protruding Lens (2.1mm/0.08")

Drivers: HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming.

Remote Mounting Of Drivers: Wire size 18 AWG - max distance (from fixture to drivers) 40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.

Remote Emergency: Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

Mechanical: Luminaires mount directly over J box (by others - North America only).

L70 @25deg C: > 50,000 hrs.


Delivered Lumens: Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.

Approvals: Damp Location (Indoor use only).


MOUNTING & OPTICS




Interior - Suspended
Direct




Interior - Suspended
Direct & Indirect




95 3210



95 3220



95 3310



95 3320

HOW TO ORDER

A SPECIFY LUMINAIRE

Code:	Type:	Light Direction:	Size:	Power (LED):	Delivered lms:	LPW:
95 3210	A	Direct	1219mm/48" & 1829mm/72"	130W	10783	83
95 3220	B	Direct	914mm/36" & 1524mm/60" & 2134mm/84"	202W	16742	83
95 3310	A	Direct/Indirect	1219mm/48" & 1829mm/72"	268W	22512	84
95 3320	B	Direct/Indirect	914mm/36" & 1524mm/60" & 2134mm/84"	405W	33992	84

B SPECIFY COLOR (DIRECT)

D30	3000K (min 80 CR)
D35	3500K (min 80 CR)
D40	4000K (min 80 CR)
DRD	Red
DGN	Green
DBL	Blue

C SPECIFY COLOR (INDIRECT)

N0	Indirect CCT/Color not required
N30	3000K (min 80 CR)
N35	3500K (min 80 CR)
N40	4000K (min 80 CR)
NRD	Red
NGN	Green
NBL	Blue

D SPECIFY FINISH

F1	White
F2	Black
F20	Metallic Silver
F27	Wood Grain - Light Cherry (Not available with Type B)
F28	Wood Grain - Dark Walnut (Not available with Type B)

E SPECIFY EMERGENCY


E0	Emergency system not required
E2	Remote emergency system

EXAMPLE SPECIFICATION CODE


953230/D35/NRD/F20/E0

DIMENSIONAL DIAGRAMS

TYPE A

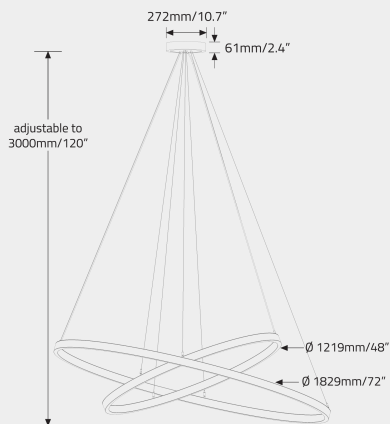

TYPE B

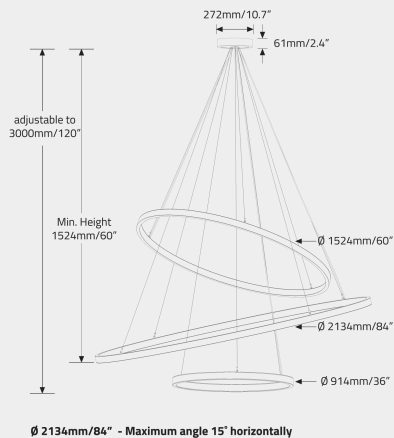

APPROVALS

