



GENERAL SPECIFICATION

Body and trim: Aluminum.

Finish: Powder coated.

Suspension: Stainless steel cables.

Power cable: Silver braided.

Diffuser: Protruding Lens (2.1mm/0.08").

Drivers: HPF electronic drivers for 120-277V, 0-10V, 1% dimming.

Remote Mounting Of Drivers: Wire size 18 AWG - max distance (from fixture to drivers) 40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation. .

Remote Emergency: Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

Mechanical: Luminaires mount directly over J box (by others - North America only).

L70 @25deg C: > 50,000 hrs.

Delivered Lumens: Delivered lumens & LPW based on 4000K (min 80 CRI) for White LEDs only.


Approvals: Damp Location (Indoor use only).

MICRO RING INDIRECT


MOUNTING & OPTICS




Suspended Indirect




95 4126




95 4136




95 4148



95 4160



95 4172



95 4184

HOW TO ORDER

A SPECIFY LUMINAIRE

Code:	Diameter (A):	Power (LED):	Delivered lms:	LPW:	Suspension Points:
95 4126	660mm/26"	28W	2378	85	3
95 4136	914mm/36"	40W	3406	85	3
95 4148	1219mm/48"	54W	4599	85	3
95 4160	1524mm/60"	68W	5754	85	3
95 4172	1829mm/72"	80W	6812	85	6
95 4184	2134mm/84"	95W	8072	85	6

B SPECIFY CCT/COLOR

30	3000K (min 80 CRI)
35	3500K (min 80 CRI)
40	4000K (min 80 CRI)
RD	Red
GN	Green
BL	Blue

C SPECIFY SUSPENSION

S1	Vertical, Remote Driver
S2	Hub, Remote Driver (available up to 1524mm/60" dia)
S3	Vertical, Integral Driver
S4	Hub, Integral Driver (available up to 1524mm/60" dia)

D SPECIFY FINISH

F1	White
F2	Black
F20	Metallic silver

E SPECIFY LUMEN & WATTAGE REDUCTION

L0	100% of standard output
L1	Lumen & Wattage Reduction to approximately 75% of standard output
L2	Lumen & Wattage Reduction to approximately 50% of standard output
L3	Lumen & Wattage Reduction to approximately 25% of standard output

Additional Information

Note: Custom reduction percentages available upon request.

F SPECIFY EMERGENCY


E0	Emergency system not required
E2	Remote emergency system

EXAMPLE CODE


954136/35/S2/F2/L0/E0

DIMENSIONAL DIAGRAMS


S1 VERTICAL, REMOTE DRIVER

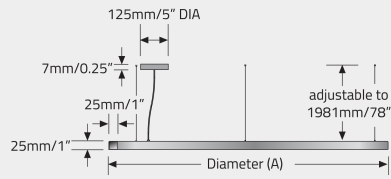

S3 - VERTICAL, INTEGRAL DRIVER

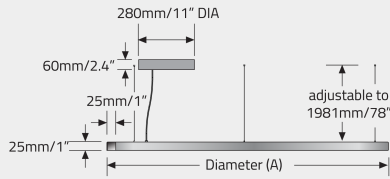

S2 HUB, REMOTE DRIVER

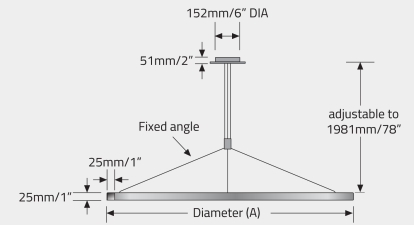

S4 HUB, INTEGRAL DRIVER

