




Polaris 30 Wallwasher Trimless - Trimless



RL68BO11-9030WWD010-UI



160 x 38 mm

DESCRIPTION

Square shape mounting trim in cast aluminium with springs for trim installation on ceiling thickness 2-25mm or brackets for trimless installation on ceiling thickness 2-25mm. Luminaire body in cast aluminium with integrated layers of diffusers and reflectors made from thermoplastic and super pure aluminium.

MOUNTING

Non Motorized - Recessed-Non Motorized

OPTIC

Set of PMMA lenses.

ELECTRICAL / LED DRIVER

D0 - No Dimming

MOUNTING ADAPTER



New Construction IC

UI

LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Osram - Power LED

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 12.74

DELIVERED LUMEN: 980.232lm

IP: 20

Notes:



ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11-UN**

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH	MOUNTING OPTION
RL68	BO11	-	90	30 - 3000K	WW	D0	10 - Black	UI

NOTES:

17: white light body with black integrated louvre. For black body with white integrated louvre consult us.


We reserve the right to change specifications without prior notification.

HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----



Polaris 30 Wallwasher Trimless - Trimless

RL69BO11-9030WWD010-UI

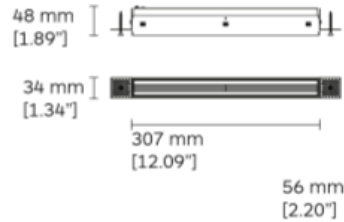

310 x 36 mm

DESCRIPTION

Square shape mounting trim in cast aluminium with springs for trim installation on ceiling thickness 2-25mm or brackets for trimless installation on ceiling thickness 2-25mm. Luminaire body in cast aluminium with integrated layers of diffusers and reflectors made from thermoplastic and super pure aluminium.

MOUNTING

Non Motorized - Recessed-Non Motorized

OPTIC

Set of PMMA lenses.

ELECTRICAL / LED DRIVER

D0 - No Dimming

MOUNTING ADAPTER



New Construction IC

UI

LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Osram - Power LED

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 25.48

DELIVERED LUMEN: 1960.464lm

IP: 20

Notes:



ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11-UN**

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH	MOUNTING OPTION
RL69	BO11	-	90	30 - 3000K	WW	D0	10 - Black	UI

NOTES:

17: white light body with black integrated louvre. For black body with white integrated louvre consult us.


We reserve the right to change specifications without prior notification.

HONG KONG - LONDON - MILAN - SHANGHAI - USA



Polaris 30 Wallwasher Trimless - Trimless

RL70BO11-9030WWD010-UI

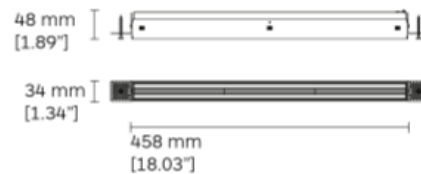

460 x 36 mm

DESCRIPTION

Square shape mounting trim in cast aluminium with springs for trim installation on ceiling thickness 2-25mm or brackets for trimless installation on ceiling thickness 2-25mm. Luminaire body in cast aluminium with integrated layers of diffusers and reflectors made from thermoplastic and super pure aluminium.

MOUNTING

Non Motorized - Recessed-Non Motorized

OPTIC

Set of PMMA lenses.

ELECTRICAL / LED DRIVER

D0 - No Dimming

MOUNTING ADAPTER



New Construction IC

UI

LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Osram - Power LED

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 38.22

DELIVERED LUMEN: 2940.696lm

IP: 20

Notes:



ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11-UN**

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH	MOUNTING OPTION
RL70	BO11	-	90	30 - 3000K	WW	D0	10 - Black	UI

NOTES:

17: white light body with black integrated louvre. For black body with white integrated louvre consult us.

We reserve the right to change specifications without prior notification.

HONG KONG - LONDON - MILAN - SHANGHAI - USA