




## Polaris 30 Adjustable Trimless - 4 - Trimless



## RL72BO11-903034D010

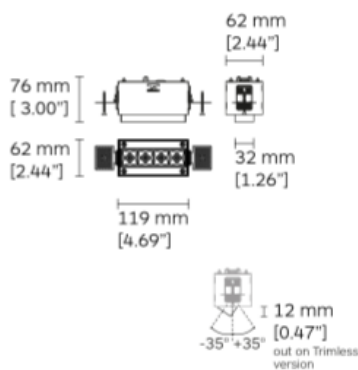

127 x 84 mm

### DESCRIPTION

Square shape mounting trim in cast aluminium with springs for trim installation on ceiling thickness 2-25mm or brackets for trimless installation on ceiling thickness 2-25mm. Luminaire body in cast aluminium with integrated diamond faceted screen made from thermoplastic and metalized polycarbonate reflector. Available in different configurations up to 16 light heads. Light heads collectively tiltable in two directions from 0° to 35°.

### MOUNTING

Indoor Lighting - Recessed

### OPTIC

Reflector. Medium and wide beam angle available. UGR<13 for a better visual comfort.

### ELECTRICAL / LED DRIVER

D0 - No Dimming

### ORDERING CODE

Follow the steps to specify your fixture final code, example: RE61MB13-803020DL11

### LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Osram - Power LED

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 8.8

DELIVERED LUMEN: 684lm

IP: 20

Notes:



PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
RL72	BO11	-	90	30 - 3000K	34	D0	10 - Black


NOTES:

We reserve the right to change specifications without prior notification.


HONG KONG - LONDON - MILAN - SHANGHAI - USA



## Polaris 30 Adjustable Trimless - 8 - Trimless

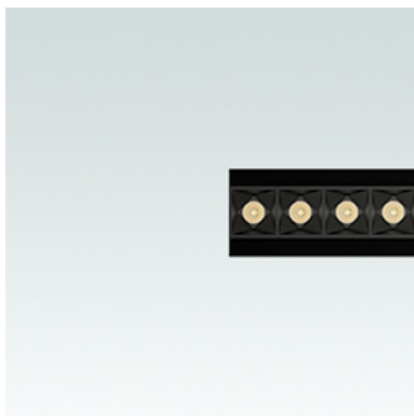

## RL74BO11-903034D010

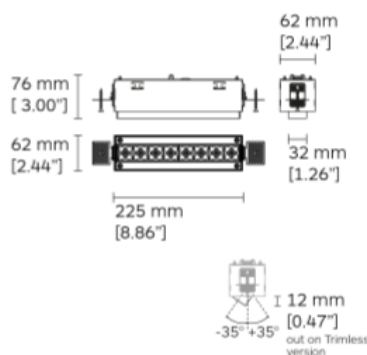

232 x 84 mm

### DESCRIPTION

Square shape mounting trim in cast aluminium with springs for trim installation on ceiling thickness 2-25mm or brackets for trimless installation on ceiling thickness 2-25mm. Luminaire body in cast aluminium with integrated diamond faceted screen made from thermoplastic and metalized polycarbonate reflector. Available in different configurations up to 16 light heads. Light heads collectively tiltable in two directions from 0° to 35°.

### MOUNTING

Indoor Lighting - Recessed

### OPTIC

Reflector. Medium and wide beam angle available. UGR<13 for a better visual comfort.

### ELECTRICAL / LED DRIVER

D0 - No Dimming

### LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Osram - Power LED

SDCM:

CCT: 30 - 3000K


CRI: 90

SYSTEM POWER: 17.6

DELIVERED LUMEN: 1368lm

IP: 20

Notes:



### ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
RL74	BO11	-	90	30 - 3000K	34	D0	10 - Black

### NOTES:

We reserve the right to change specifications without prior notification.


HONG KONG - LONDON - MILAN - SHANGHAI - USA



## Polaris 30 Adjustable Trimless - 12 - Trimless



## RL76BO11-903034D010

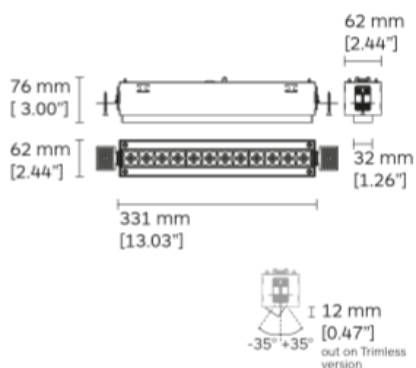

339 x 64 mm

### DESCRIPTION

Square shape mounting trim in cast aluminium with springs for trim installation on ceiling thickness 2-25mm or brackets for trimless installation on ceiling thickness 2-25mm. Luminaire body in cast aluminium with integrated diamond faceted screen made from thermoplastic and metalized polycarbonate reflector. Available in different configurations up to 16 light heads. Light heads collectively tiltable in two directions from 0° to 35°.

### MOUNTING

Indoor Lighting - Recessed

### OPTIC

Reflector. Medium and wide beam angle available. UGR<13 for a better visual comfort.

### ELECTRICAL / LED DRIVER

D0 - No Dimming

### ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

### LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Osram - Power LED

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 28.4712

DELIVERED LUMEN: 1819.896lm

IP: 20

Notes:



PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
RL76	BO11	-	90	30 - 3000K	34	D0	10 - Black

NOTES:

We reserve the right to change specifications without prior notification.


HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----



## Polaris 30 Adjustable Trimless - 16 - Trimless



## RL78BO11-903034D010

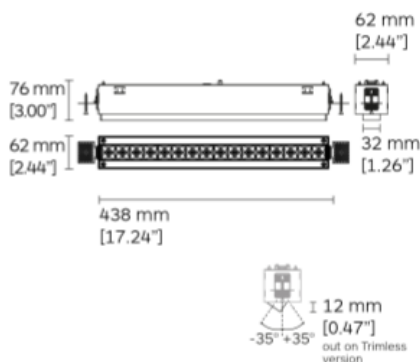

448 x 84 mm

### DESCRIPTION

Square shape mounting trim in cast aluminium with springs for trim installation on ceiling thickness 2-25mm or brackets for trimless installation on ceiling thickness 2-25mm. Luminaire body in cast aluminium with integrated diamond faceted screen made from thermoplastic and metalized polycarbonate reflector. Available in different configurations up to 16 light heads. Light heads collectively tiltable in two directions from 0° to 35°.

### MOUNTING

Indoor Lighting - Recessed

### OPTIC

Reflector. Medium and wide beam angle available. UGR<13 for a better visual comfort.

### ELECTRICAL / LED DRIVER

D0 - No Dimming

### ORDERING CODE

Follow the steps to specify your fixture final code, example: RE61MB13-803020DL11

### LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Osram - Power LED

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 37.9616

DELIVERED LUMEN: 2426.528lm

IP: 20

Notes:



PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
RL78	BO11	-	90	30 - 3000K	34	D0	10 - Black

NOTES:

We reserve the right to change specifications without prior notification.

HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----