




## Pixo 77 - L: 170 mm



## 7234BC22-903016D110

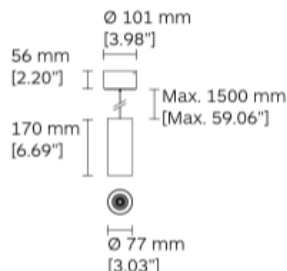

### DESCRIPTION

Pendant mounted luminaire with light body in extruded aluminium. Light body available in two diameter (36mm and 77mm) Exchangable front ring in wide range of colours. Supplied with ceiling canopy and pre-installed 1.5m electrical cable and with 1 x 1.5m pendant steel wires. Available in two sizes and four different length.

### MOUNTING

Indoor Lighting - Pendant

### OPTIC

Reflector. Narrow, medium and wide beam angle available.

### ELECTRICAL / LED DRIVER

D1 - 0-10 Dim

### LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Citizen - COB

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 13.2

DELIVERED LUMEN: 1227.6lm

IP: 20

Notes:

### ACCESSORIES



Acrylic diffuser 2C36



Colour Rings 2C34



### ORDERING CODE

Follow the steps to specify your fixture final code, example: RE61MB13-803020DL11

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
7234	BC22	-	90	30 - 3000K	16	D1	10 - Black

### NOTES:

Product length: 170 mm.

We reserve the right to change specifications without prior notification.


HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----



## Pixo 77 - L: 330 mm



## 7237BC22-903016D010

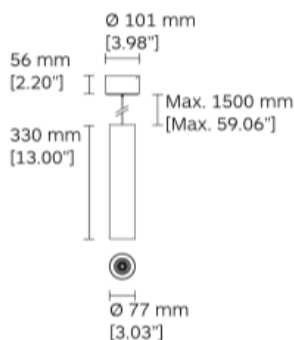

### DESCRIPTION

Pendant mounted luminaire with light body in extruded aluminium. Light body available in two diameter (36mm and 77mm) Exchangeable front ring in wide range of colours. Supplied with ceiling canopy and pre-installed 1.5m electrical cable and with 1 x 1.5m pendant steel wires. Available in two sizes and four different length.

### MOUNTING

Indoor Lighting - Pendant

### OPTIC

Reflector. Narrow, medium and wide beam angle available.

### ELECTRICAL / LED DRIVER

D0 - No Dimming

### LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Citizen - COB

SDCM:

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 13.2

DELIVERED LUMEN: 1227.6lm

IP: 20

Notes:

### ACCESSORIES



Acrylic diffuser

2C36



Colour Rings

2C34



### ORDERING CODE

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
7237	BC22	-	90	30 - 3000K	16	D0	10 - Black

### NOTES:

Product length: 330 mm.

We reserve the right to change specifications without prior notification.

HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----

# THE LUX COMPANY Pixo Pendant 77 – L : 550 mm




THE  
LUX  
COMPANY

## Pixo 77 - L: 550 mm



## 7239BC22-903016D010

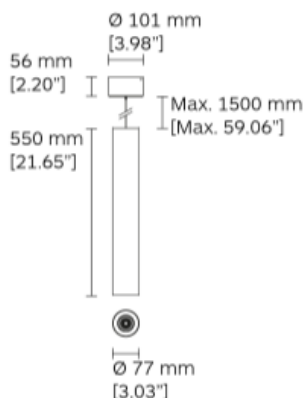

### DESCRIPTION

Pendant mounted luminaire with light body in extruded aluminium. Light body available in two diameter (36mm and 77mm) Exchangable front ring in wide range of colours. Supplied with ceiling canopy and pre-installed 1.5m electrical cable and with 1 x 1.5m pendant steel wires. Available in two sizes and four different length.

### MOUNTING

Indoor Lighting - Pendant

### OPTIC

Reflector. Narrow, medium and wide beam angle available.

### ELECTRICAL / LED DRIVER

D0 - No Dimming

### LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE: LED Built-in with body - Citizen - COB

SDCM: 3-steps

CCT: 30 - 3000K

CRI: 90

SYSTEM POWER: 13.2

DELIVERED LUMEN: 1227.6lm

IP: 20

Notes:

### ACCESSORIES



Acrylic diffuser 2C36



Colour Rings 2C34



### ORDERING CODE

Follow the steps to specify your fixture final code, example: RE61MB13-803020DL11

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
7239	BC22	-	90	30 - 3000K	16	D0	10 - Black

### NOTES:

Product length: 550 mm.

We reserve the right to change specifications without prior notification.


HONG KONG - LONDON - MILAN - SHANGHAI - USA



**Pixo 77 - L: 820 mm**



**7241BC22-903016D010**

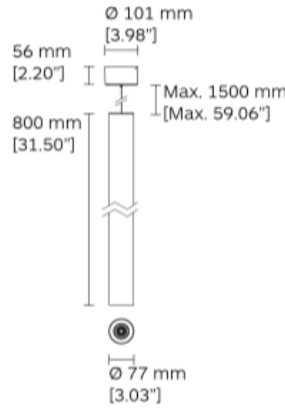

**DESCRIPTION**

Pendant mounted luminaire with light body in extruded aluminium. Light body available in two diameter (36mm and 77mm) Exchangable front ring in wide range of colours. Supplied with ceiling canopy and pre-installed 1.5m electrical cable and with 1 x 1.5m pendant steel wires. Available in two sizes and four different length.

**MOUNTING**

Indoor Lighting - Pendant

**OPTIC**

Reflector. Narrow, medium and wide beam angle available.

**ELECTRICAL / LED DRIVER**

D0 - No Dimming

**LIGHT SOURCE AND PERFORMANCE**

LIGHT SOURCE: LED Built-in with body - Citizen - COB

SDCM:

CCT: 30 - 3000K

CRI: 90



SYSTEM POWER: 13.2

DELIVERED LUMEN: 1227.6lm

IP: 20

Notes:

**ACCESSORIES**

	Acrylic diffuser	2C36
	Colour Rings	2C34



**ORDERING CODE**

Follow the steps to specify your fixture final code, example: **RE61MB13-803020DL11**

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DRIVER OPTIONS	FINISH
7241	BC22	-	90	30 - 3000K	16	D0	10 - Black

**NOTES:**

Product length: 820 mm.

We reserve the right to change specifications without prior notification.

HONG KONG	-	LONDON	-	MILAN	-	SHANGHAI	-	USA
-----------	---	--------	---	-------	---	----------	---	-----