



## GENERAL SPECIFICATION

**Body:** Aluminum.

**Canopy & Hub:** White powder coated.

**Finish:** Powder coated for standard finishes (black, metallic silver & white)

**Suspension:** Stainless steel cables.

**Power cable:** Silver braided.

**Drivers:** HPF electronic drivers for 120-277V (EU-240V), 0-10V, 1% dimming.

**Remote Mounting Of Drivers:** Wire size 18 AWG - max distance (from fixture to drivers) 40', wire size 16 AWG - max distance 60', wire size 14 AWG - max distance 90'. Drivers must be accessible after installation.

**Mechanical:** Luminaires attached directly to the J box (by others - North America only).


**Diffusers:** Frosted acrylic.

**L70 @25deg C:** > 50,000 hrs.


**Delivered Lumens:** Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.

**Approvals:** Damp Location (Indoor use only).


## MOUNTING & OPTICS




Interior - Suspended-  
Inside/Outside




98 2415




98 2425




98 2435




98 2445




98 2455




98 2465




W25




W36




W48



W60



W72



W84

## HOW TO ORDER

### A SPECIFY LUMINARIE LENGTH

Code:	Length:	Power (LED):	Delivered lms (Length):	LPW:
98 2415	635mm/25"	27W	3186	120
98 2425	915mm/36"	40W	4780	120
98 2435	1219mm/48"	53W	6372	120
98 2445	1524mm/60"	66W	7966	120
98 2455	1829mm/72"	80W	9558	120
98 2465	2134mm/84"	93W	11152	120

#### Additional Information

Calculate total lumens by adding the Length lumens to the Width lumens. For example: 36" length x 48" width = 4780 + 6372 = 11152 total lumens.

### B SPECIFY WIDTH

Code:	Width:	Power (LED):	Delivered lms (Width):	LPW:
W25	635mm/25"	27W	3186	120
W36	915mm/36"	40W	4780	120
W48	1219mm/48"	53W	6372	120
W60	1524mm/60"	66W	7966	119
W72	1829mm/72"	80W	9558	120
W84	2134mm/84"	93W	11152	120

### C SPECIFY CCT/COLOR (OUTSIDE)

T30	3000K (min 80CRI)
T35	3500K (min 80CRI)
T40	4000K (min 80CRI)
TRD	Red
TGN	Green
TBL	Blue

### D SPECIFY CCT/COLOR (INSIDE)

S30	3000K (min 80CRI)
S35	3500K (min 80CRI)
S40	4000K (min 80CRI)
SRD	Red
SGN	Green
SBL	Blue

### E SPECIFY SUSPENSION

S1	Vertical, Remote Driver
S3	Vertical, Integral Driver

### F SPECIFY FINISH

Z1	Wood Grain - Light Cherry
Z2	Wood Grain - Dark Walnut

## G SPECIFY LUMEN & WATTAGE REDUCTION

- PRO** Lumen & Wattage Reduction to approximately 25% of standard output
- PR1** Lumen & Wattage Reduction to approximately 50% of standard Output
- PR2** Lumen & Wattage Reduction to approximately 75% of standard Output

### Additional Information


*Note: Custom Reduction Percentages Available Upon Request.*

## EXAMPLE SPECIFICATION CODE



982415/W14/T30/S30/S1/Z1

## DIMENSIONAL DIAGRAMS

SI - VERTICAL, REMOTE DRIVER

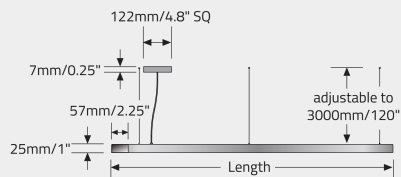

S3 - VERTICAL, INTEGRAL DRIVER

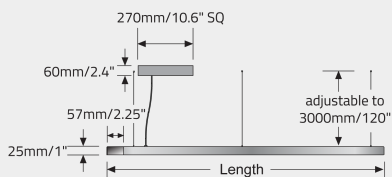

## APPROVALS

