

# DOMINO 4 BASIS TRACK

luminaires  
spec sheet BT-654

NARROW SPOT



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 9.7W

**Module Output** 712lm

**Absolute Output** 658lm

**LOR** 93%

**Colour Temperature** 3000K\*


**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 12°

**Gear Type** Dimmable options available


**Weight** 432g

\* Please enquire as to the availability of non-standard colour temperatures.


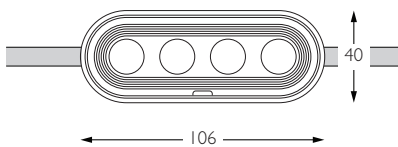


Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

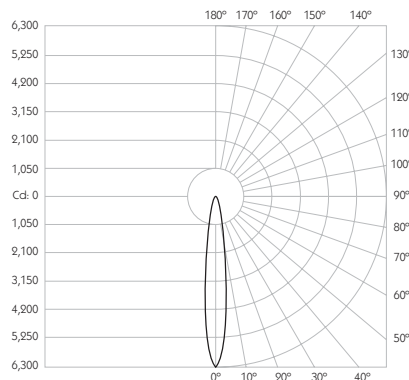

Distance	Beam Diameter	Illuminance (lx)
1m	0.21m	6,985 lx
2m	0.42m	1,570 lx
3m	0.63m	700 lx
4m	0.84m	390 lx
5m	1.05m	250 lx

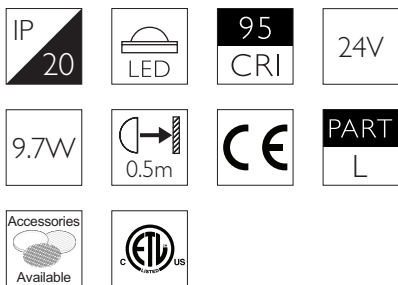

Basis Track

BT-654-AL-309512



PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

Version 11.17

# DOMINO 4 BASIS TRACK

luminaires  
spec sheet BT-654

FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 9.7W

**Module Output** 712lm

**Absolute Output** 600lm

**LOR** 84%

**Colour Temperature** 3000K\*


**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 30°

**Gear Type** Dimmable options available





**Weight** 432g

\* Please enquire as to the availability of non-standard colour temperatures.

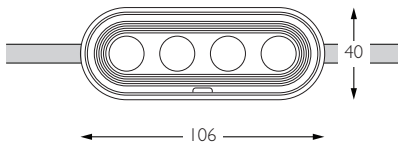


Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

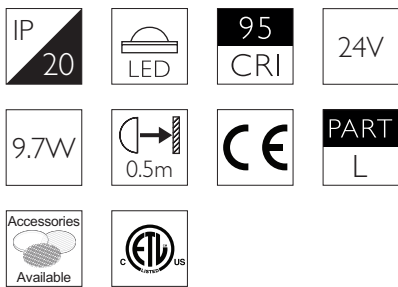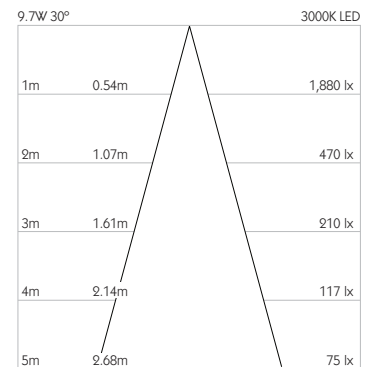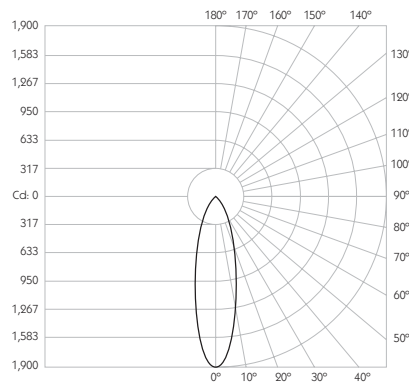

Basis Track

BT-654-AL-309530

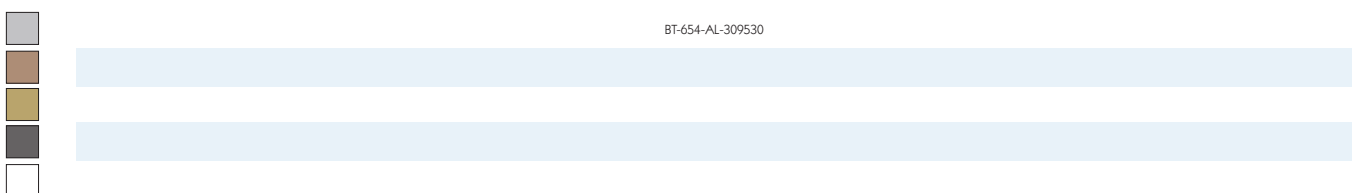

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

# DOMINO 4 BASIS TRACK

luminaires  
spec sheet BT-654

WIDE FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 9.7W

**Module Output** 712lm

**Absolute Output** 655lm

**LOR** 92%

**Colour Temperature** 3000K\*



**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 60°

**Gear Type** Dimmable options available





**Weight** 432g

\* Please enquire as to the availability of non-standard colour temperatures.

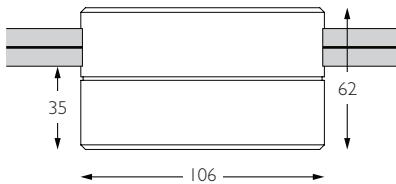


Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

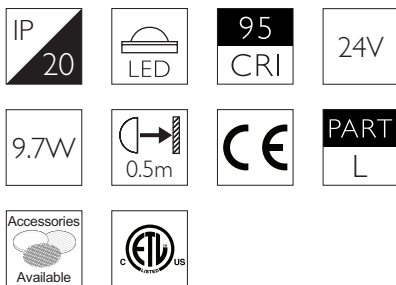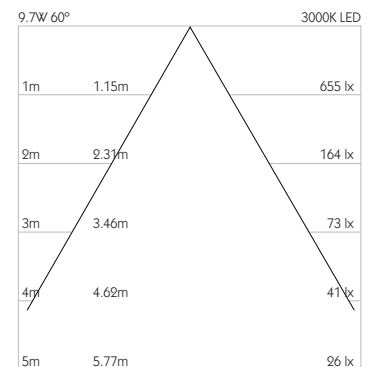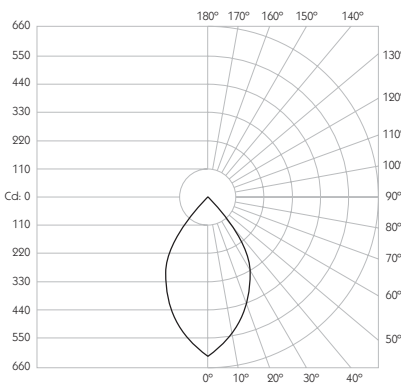

Basis Track

BT-654-AL-309560

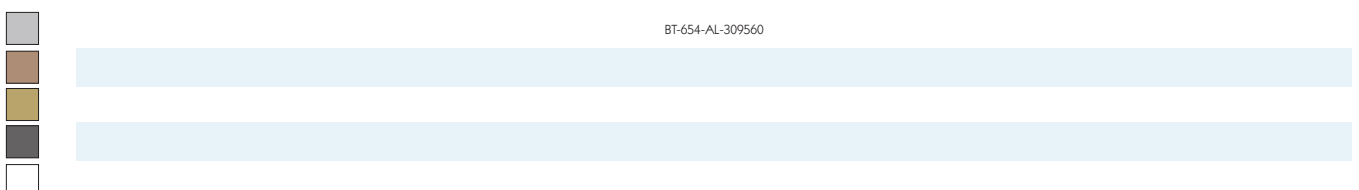

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

# DOMINO 4 BASIS TRACK

luminaires  
spec sheet BT-654

ELLIPSE



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 9.7W

**Module Output** 712lm

**Absolute Output** 652lm

**LOR** 92%

**Colour Temperature** 3000K\*


**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 12X35°

**Gear Type** Dimmable options available


**Weight** 432g

\* Please enquire as to the availability of non-standard colour temperatures.

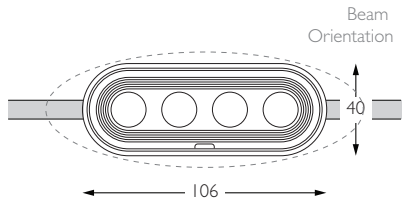


Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

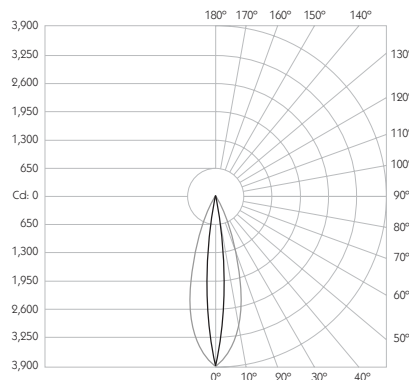


Distance (m)	Beam Diameter (m)	Beam Area (m²)	Illuminance (lx)
1m	0.63m x 0.21m	0.1323	3,894 lx
2m	1.26m x 0.42m	0.5292	973 lx
3m	1.89m x 0.63m	1.1907	432 lx
4m	2.52m x 0.84m	2.1168	243 lx
5m	3.15m x 1.05m	3.3075	155 lx

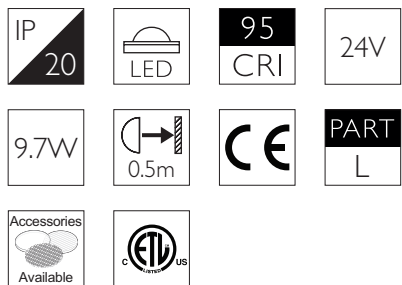

Basis Track

BT-654-AL-3095E1

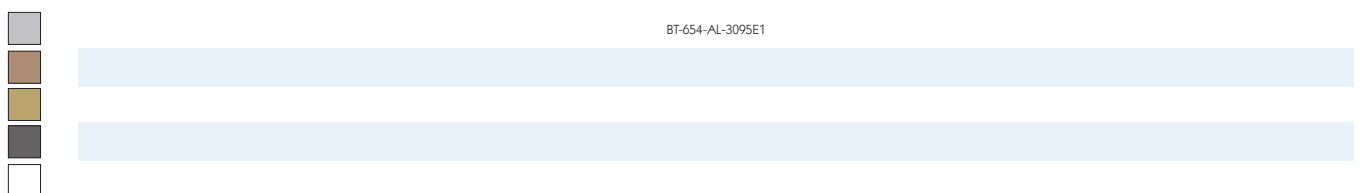

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

# DOMINO 4 BASIS TRACK

Luminaires  
spec sheet BT-654

VERTICAL ELLIPSE



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 9.7W

**Module Output** 712lm

**Absolute Output** 652lm

**LOR** 92%

**Colour Temperature** 3000K\*


**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 35X12°

**Gear Type** Dimmable options available


**Weight** 432g

\* Please enquire as to the availability of non-standard colour temperatures.


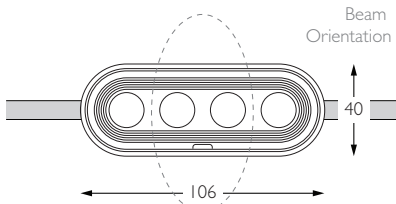


Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

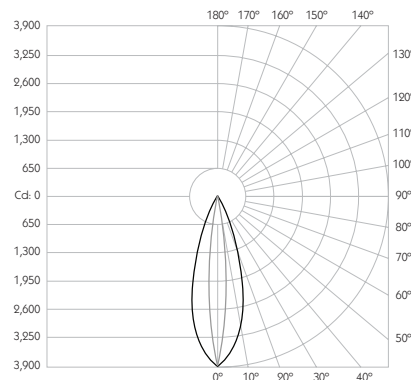


Distance (m)	Beam Width (m)	Beam Depth (m)	Illuminance (lx)
1m	0.63m	0.21m	3,894 lx
2m	1.26m	0.42m	973 lx
3m	1.89m	0.63m	432 lx
4m	2.52m	0.84m	243 lx
5m	3.15m	1.05m	155 lx

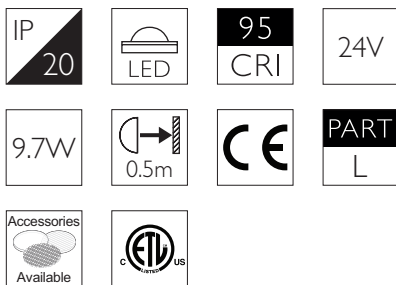

Basis Track

BT-654-AL-3095E2

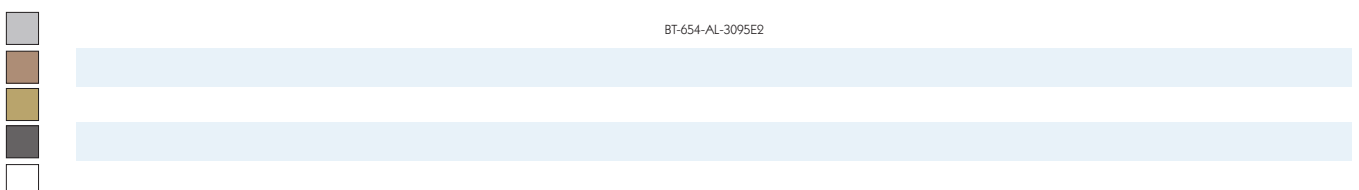

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

# DOMINO 4 BASIS TRACK

luminaires  
spec sheet BT-654

SOFT ELLIPSE



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 9.7W

**Module Output** 712lm

**Absolute Output** 626lm

**LOR** 88%

**Colour Temperature** 3000K\*


**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 15X30°

**Gear Type** Dimmable options available


**Weight** 432g

\* Please enquire as to the availability of non-standard colour temperatures.


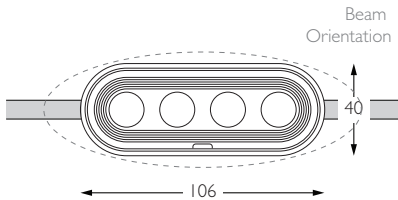


Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

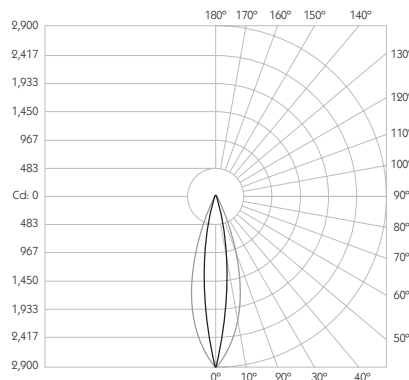


Distance	Beam Width (m)	Beam Height (m)	Illuminance (lx)
1m	0.54m	0.26m	2,887 lx
2m	1.07m	0.53m	721 lx
3m	1.61m	0.79m	320 lx
4m	2.14m	1.05m	180 lx
5m	2.68m	1.32m	115 lx

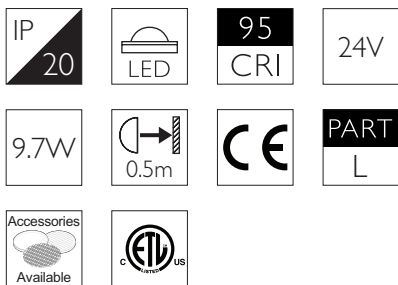

Basis Track

BT-654-AL-3095E3

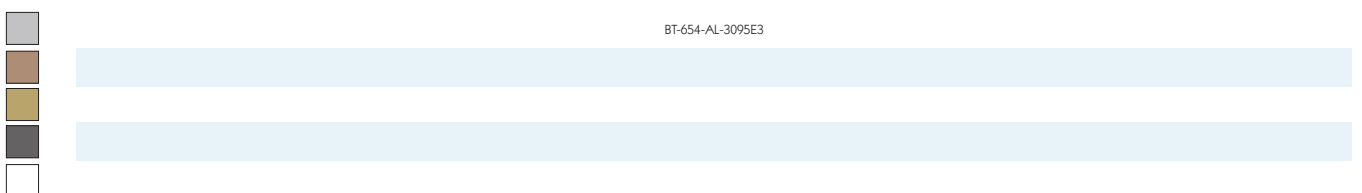

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

# DOMINO 4 BASIS TRACK

Luminaires  
spec sheet BT-654

VERTICAL SOFT ELLIPSE



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 9.7W

**Module Output** 712lm

**Absolute Output** 626lm

**LOR** 88%

**Colour Temperature** 3000K\*


**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 30X15°

**Gear Type** Dimmable options available


**Weight** 432g

\* Please enquire as to the availability of non-standard colour temperatures.


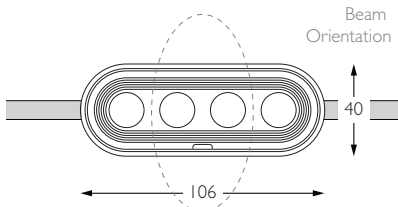


Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

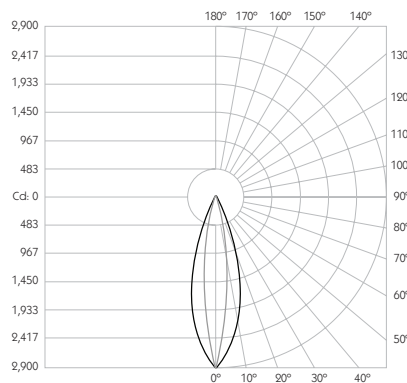


Distance (m)	Beam Width (m)	Beam Depth (m)	Illuminance (lx)
1m	0.54m	0.26m	2,887 lx
2m	1.07m	0.53m	721 lx
3m	1.61m	0.79m	320 lx
4m	2.14m	1.05m	180 lx
5m	2.68m	1.32m	115 lx

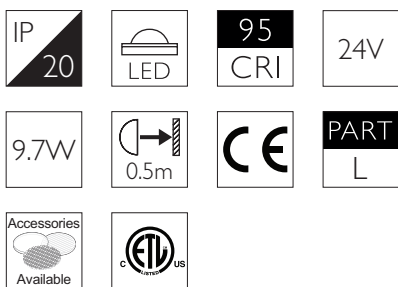

Basis Track

BT-654-AL-3095E4

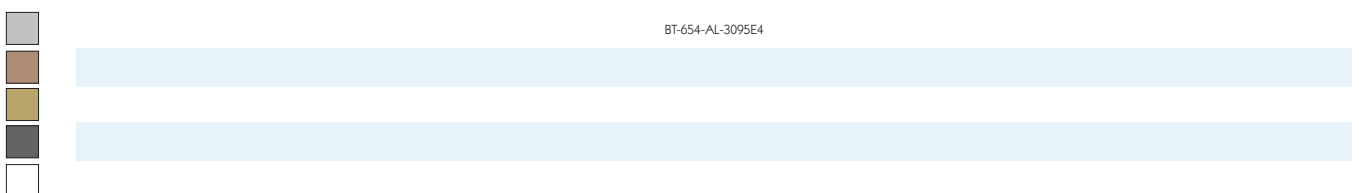

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

# DOMINO 4 BASIS TRACK

luminaires  
spec sheet BT-654

FOCAL SPOT



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 9.7W

**Module Output** 712lm

**Absolute Output** 630lm

**LOR** 92%

**Colour Temperature** 3000K\*



**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 12° | 30°

**Gear Type** Dimmable options available





**Weight** 432g

\* Please enquire as to the availability of non-standard colour temperatures.

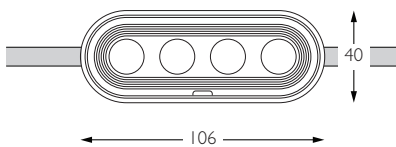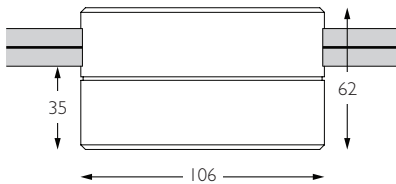


Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

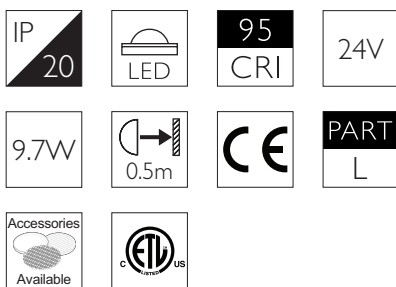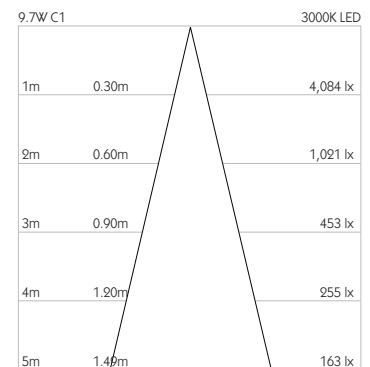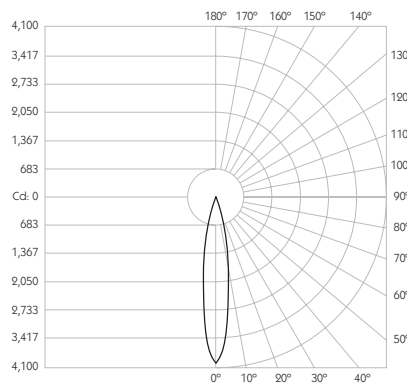

Basis Track

BT-654-AL-3095C1

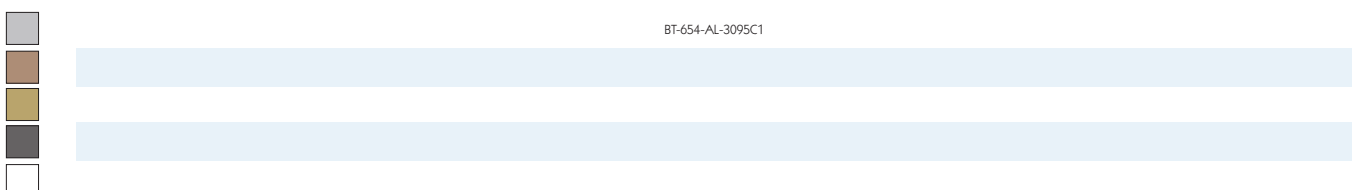

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626



# DOMINO 4 BASIS TRACK

luminaires  
spec sheet BT-654

FOCAL FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 9.7W

**Module Output** 712lm

**Absolute Output** 657lm

**LOR** 92%

**Colour Temperature** 3000K\*


**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 12° | 60°

**Gear Type** Dimmable options available


**Weight** 432g

\* Please enquire as to the availability of non-standard colour temperatures.

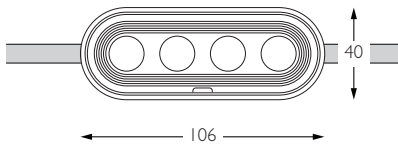


Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

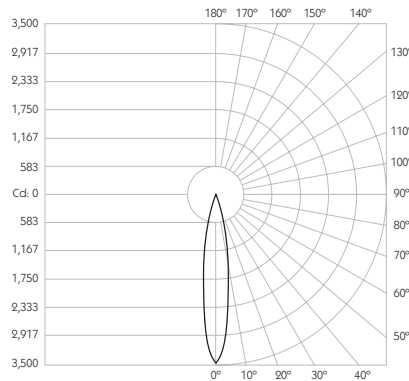


Distance (m)	Beam Diameter (m)	Footcandle (lx)
1m	0.30m	3,470 lx
2m	0.50m	867 lx
3m	0.80m	385 lx
4m	1.10m	216 lx
5m	1.40m	138 lx

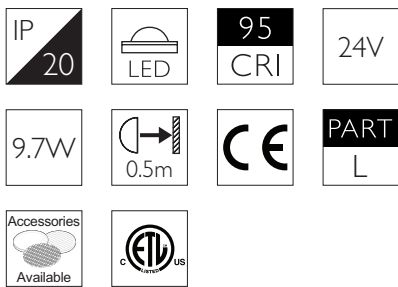

Basis Track

BT-654-AL-3095C2

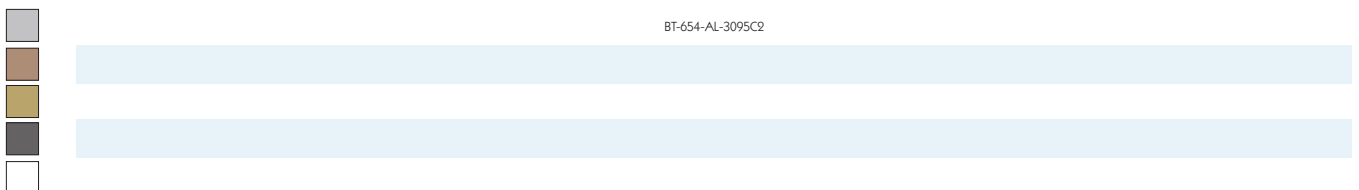

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

# DOMINO 4 BASIS TRACK

luminaires  
spec sheet BT-654

SOFT FOCAL FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium

**System** Basis Track

**Accessories** Lenses

**System Power** 9.7W

**Module Output** 712lm

**Absolute Output** 628lm

**LOR** 92%

**Colour Temperature** 3000K\*


**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 30° | 60°

**Gear Type** Dimmable options available





**Weight** 432g

\* Please enquire as to the availability of non-standard colour temperatures.

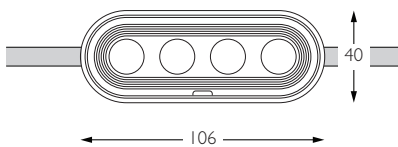


Domino 4 Basis Track is a low profile, track-mounted 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in brushed aluminium, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 4 Basis Track is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 9.7W from its internal 24V DC driver.

Product Photometry independently tested in accordance with LM-79

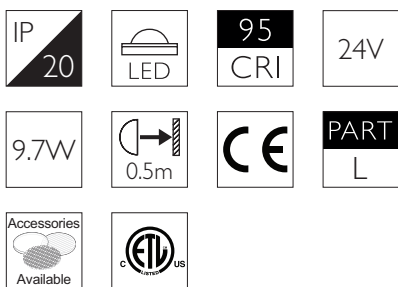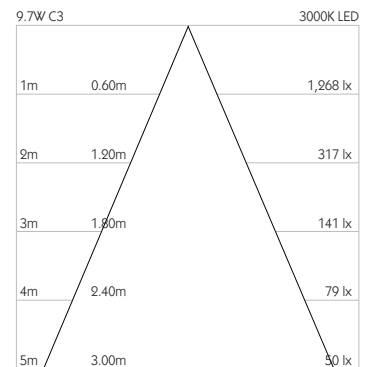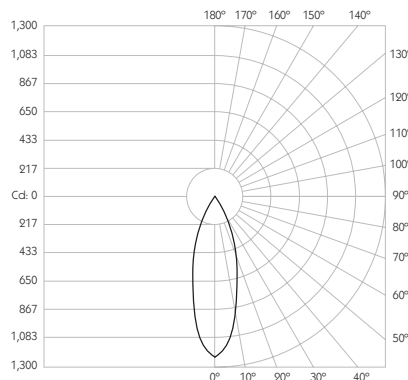

Basis Track

BT-654-AL-3095C3

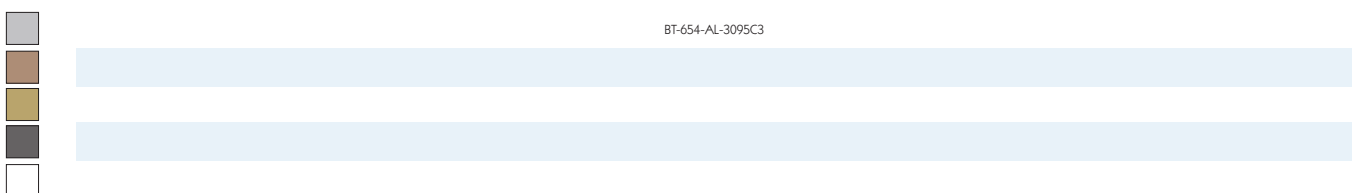

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

Version 11.17