




**Category** Interior use only IP20  
**Material** Machined Aluminium  
**Finish** Brushed Aluminium | Black | White | Custom  
**System** Eutrac | Monopoint | LV tracks  
**Lockable** Pan & Tilt  
**Accessories** Snoots | Louvres | Lenses  
**System Power** 3.6W  
**Module Output** 305lm  
**Absolute Output** 294lm  
**LOR** 96%  
**Colour Temperature** 3000K | 2700K | \*  
**CRI** Ra: 95    **TM-30** Rf: 93 Rg: 99  
**Optics** 14°  
**Gear Type** Dimmable options available  
**Weight** 181g






\* Please enquire as to the availability of non-standard Colour Temperatures.



Discus 11 is a compact 95CRI LED spotlight, based on a discreet design with advanced features and benefits. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Discus 11 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 305lm at 3.6W.

Product Photometry independently tested in accordance with LM-79

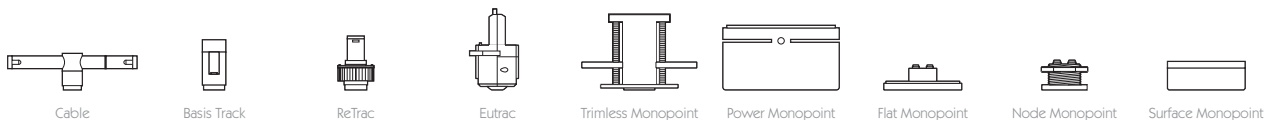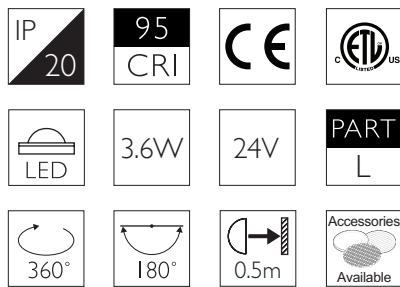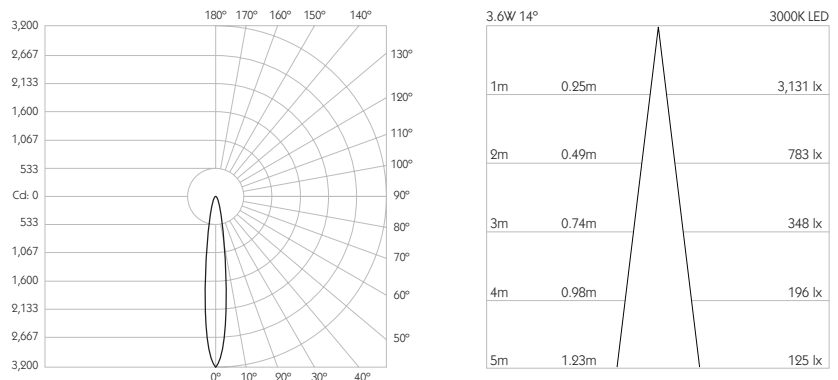

Finish	Cable	Basis Track	ReTrac	Eutrac	Trimless Monopoint	Power Monopoint	Flat Monopoint	Node Monopoint	Surface Monopoint
Brushed Aluminium	CA-742-AL-XX9514	BT-742-AL-XX9514	RT-742-AL-XX9514	EUT3-742-AL-XX9514	MPS-742-AL-XX9514		MPX-742-AL-XX9514	MPY-742-AL-XX9514	MPZ-742-AL-XX9514
Black			RT-742-BK-XX9514	EUT3-742-BK-XX9514	MPS-742-BK-XX9514		MPX-742-BK-XX9514	MPY-742-BK-XX9514	MPZ-742-BK-XX9514
White	RT-742-WH-XX9514	EUT3-742-WH-XX9514	MPS-742-WH-XX9514	MPX-742-WH-XX9514	MPY-742-WH-XX9514	MPZ-742-WH-XX9514			


For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27



**Category** Interior use only IP20  
**Material** Machined Aluminium  
**Finish** Brushed Aluminium | Black | White | Custom  
**System** Eutrac | Monopoint | LV tracks  
**Lockable** Pan & Tilt  
**Accessories** Snoots | Louvres | Lenses  
**System Power** 3.6W  
**Module Output** 305lm  
**Absolute Output** 277lm  
**LOR** 91%  
**Colour Temperature** 3000K | 2700K | \*  
**CRI** Ra: 95    **TM-30** Rf: 93 Rg: 99  
**Optics** 20°  
**Gear Type** Dimmable options available  
**Weight** 181g






\* Please enquire as to the availability of non-standard Colour Temperatures.



Discus 11 is a compact 95CRI LED spotlight, based on a discreet design with advanced features and benefits. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Discus 11 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 305lm at 3.6W.

Product Photometry independently tested in accordance with LM-79

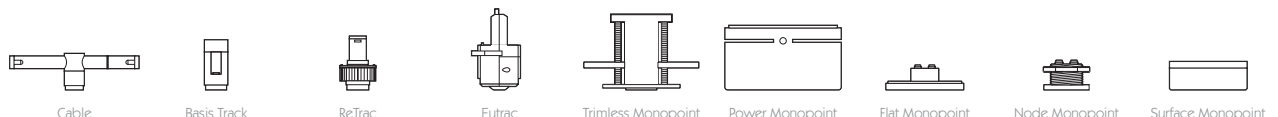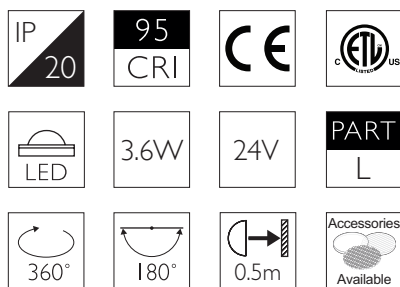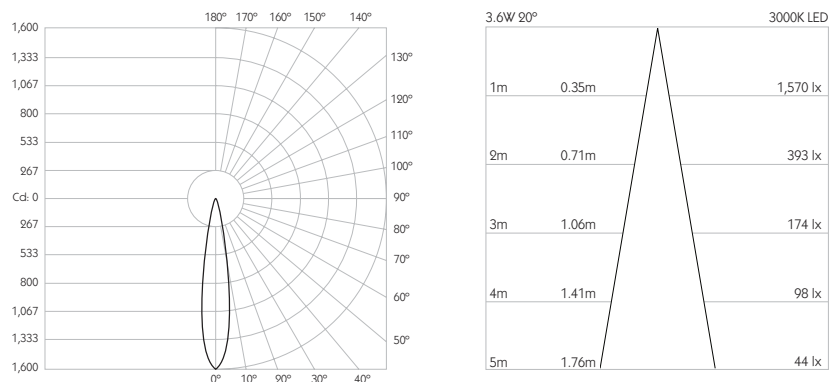

Grey	CA-742-AL-XX9520	BT-742-AL-XX9520	RT-742-AL-XX9520	EUT3-742-AL-XX9520	MPS-742-AL-XX9520	MPX-742-AL-XX9520	MPY-742-AL-XX9520	MPZ-742-AL-XX9520
Brown								
Black			RT-742-BK-XX9520	EUT3-742-BK-XX9520	MPS-742-BK-XX9520	MPX-742-BK-XX9520	MPY-742-BK-XX9520	MPZ-742-BK-XX9520
White			RT-742-WH-XX9520	EUT3-742-WH-XX9520	MPS-742-WH-XX9520	MPX-742-WH-XX9520	MPY-742-WH-XX9520	MPZ-742-WH-XX9520


For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27



**Category** Interior use only IP20  
**Material** Machined Aluminium  
**Finish** Brushed Aluminium | Black | White | Custom  
**System** Eutrac | Monopoint | LV tracks  
**Lockable** Pan & Tilt  
**Accessories** Snoots | Louvres | Lenses  
**System Power** 3.6W  
**Module Output** 305lm  
**Absolute Output** 266lm  
**LOR** 87%  
**Colour Temperature** 3000K | 2700K | \*  
**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99  
**Optics** 30°  
**Gear Type** Dimmable options available  
**Weight** 181g







\* Please enquire as to the availability of non-standard Colour Temperatures.



Discus 11 is a compact 95CRI LED spotlight, based on a discreet design with advanced features and benefits. The spotlight comes as standard in white, black and brushed aluminium finishes, and has three site changeable optics for flexible distribution. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. The Precision Lighting Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems, offering flexibility throughout the product's lifetime. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive. Discus 11 is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 305lm at 3.6W.

Product Photometry independently tested in accordance with LM-79

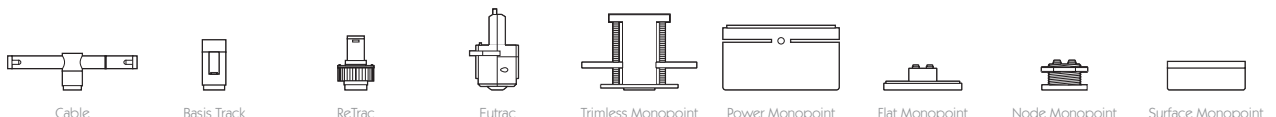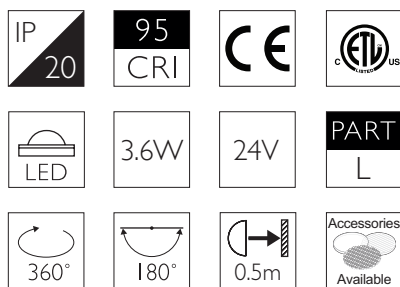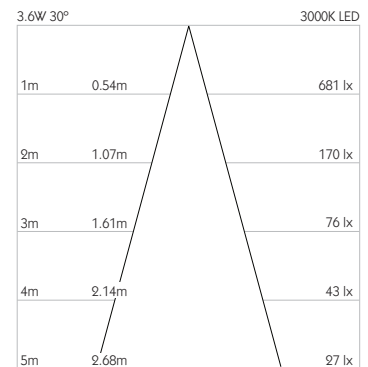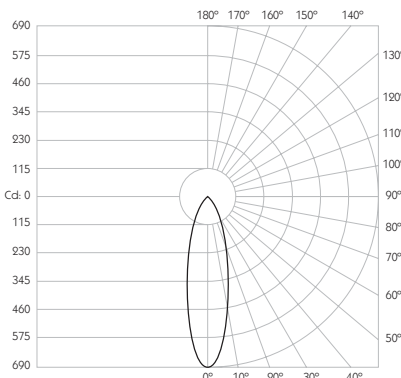

Grey	CA-742-AL-XX9530	BT-742-AL-XX9530	RT-742-AL-XX9530	EUT3-742-AL-XX9530	MPS-742-AL-XX9530	MPX-742-AL-XX9530	MPY-742-AL-XX9530	MPZ-742-AL-XX9530
Black			RT-742-BK-XX9530	EUT3-742-BK-XX9530	MPS-742-BK-XX9530	MPX-742-BK-XX9530	MPY-742-BK-XX9530	MPZ-742-BK-XX9530
White			RT-742-WH-XX9530	EUT3-742-WH-XX9530	MPS-742-WH-XX9530	MPX-742-WH-XX9530	MPY-742-WH-XX9530	MPZ-742-WH-XX9530

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27